

# ARBIDE MILLING

## SOLID CARBIDE MILLING



## Solid carbide milling

Product overview	B266-B275
Grade overview	B276-B277
System code – DIN-ISO series	B278
System code – JIS series	B279
System code – QCH series	B280-B282
GM series	B283-B338
PM series	B339-B360
PM Micro series	B361-B370
EPM series	B371-B386
VPM series	B387-B388
HM series	B389-B410
NM series	B411-B416
AL series	B417-B428
ALG/ALP series	B429-B438
TM series	B439-B454
HPC series	B455-B460
UM series	B461-B470
UMC series	B471-B472
VSM series	B473-B476
Deburring cutters – FM series	B477-B480
QCH series	B481-B491
Recommended cutting data	B492-B526
Technical information	B537-B540
Special tools	B541

# B

A

Turning

B

Milling

C

Drilling






















D

Technical  
Information

E

Index

## High performance milling

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
PM-2E		2	1.0-20.0	✓	✓	✓			✓	End mills	B339
PM-2EL		2	3.0-20.0	✓	✓	✓			✓	End mills	B340
PM-4E-G		4	1.0-20.0	✓	✓	✓			✓	End mills	B341
PM-4EL-G		4	3.0-20.0	✓	✓	✓			✓	End mills	B342
PM-4EX-G		4	3.0-20.0	✓	✓	✓			✓	End mills	B343
PM-4E		4	1.0-20.0	✓	✓	✓			✓	End mills	B344
PM-4EL		4	3.0-20.0	✓	✓	✓			✓	End mills	B345
PM-6E		6	6.0-20.0	✓	✓	✓			✓	End mills	B346
PM-6EL		6	6.0-20.0	✓	✓	✓			✓	End mills	B347
PM-2B		2	1.0-20.0	✓	✓	✓			✓	Ball nose cutters	B348
PM-2BL		2	2.0-20.0	✓	✓	✓			✓	Ball nose cutters	B349
PM-2BFP		2	1.0-20.0	✓	✓	✓			✓	Ball nose cutters	B350
PM-2BC		2	0.5-4.0	✓	✓	✓			✓	Ball nose cutter with conical neck	B351
PM-4B		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B354
PM-4BL		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B355
PM-2R		2	1.0-12.0	✓	✓	✓			✓	Torus mills	B356
PM-4H		4	3.0-12.0	✓	✓	✓			✓	High-feed mills	B357
PM-4HL		4	4.0-12.0	✓	✓	✓			✓	High-feed mills	B358
PM-4R		4	3.0-12.0	✓	✓	✓			✓	Torus mills	B359
PM-4RL		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B360
PM-2EP		2	0.5-5.0	✓	✓	✓			✓	End mills	B362

✓ Very suitable    ✓ Suitable

A  
Turning  
B  
Milling  
C  
Drilling  
D  
Technical Information  
E  
Index

## High performance milling

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
PM-2ES		2	0.3-3.0	✓	✓	✓			✓	End mills	B361
PM-2BS		2	0.3-3.0	✓	✓	✓			✓	Ball nose cutters	B364
PM-2BP		2	0.5-5.0	✓	✓	✓			✓	Ball nose cutters	B365
PM-2RP		2	0.5-5.0	✓	✓	✓			✓	Torus mills	B367
EPM-2E		2	3.0-20.0	✓	✓	✓			✓	End mills	B371
EPM-2E-W		2	3.0-20.0	✓	✓	✓			✓	End mills	B372
EPM-2EL		2	3.0-20.0	✓	✓	✓			✓	End mills	B373
EPM-2EL-W		2	3.0-20.0	✓	✓	✓			✓	End mills	B374
EPM-4E		4	3.0-20.0	✓	✓	✓			✓	End mills	B375
EPM-4E-W		4	3.0-20.0	✓	✓	✓			✓	End mills	B376
EPM-4EL		4	3.0-20.0	✓	✓	✓			✓	End mills	B377
EPM-4EL-W		4	3.0-20.0	✓	✓	✓			✓	End mills	B378
EPM-2B		2	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B379
EPM-2B-W		2	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B380
EPM-2BL		2	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B381
EPM-2BL-W		2	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B382
EPM-4B		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B383
EPM-4B-W		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B384
EPM-4BL		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B385
EPM-4BL-W		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B386
VPM-4E		4	3.0-20.0	✓	✓	✓			✓	End mills	B387

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling











D

Technical Information

E

Index

## High performance milling

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
TM-4B		2	6.0-20.0		✓			✓		Ball nose cutters	B439
TM-4BL		2	6.0-20.0		✓			✓		Ball nose cutters	B440
TM-4BP		2	6.0-20.0		✓			✓		Ball nose cutters	B441
TM-5B		2	6.0-20.0		✓			✓		Ball nose cutters	B442
TM-5BL		2	6.0-20.0		✓			✓		Ball nose cutters	B443
TM-5BP		2	6.0-20.0		✓			✓		Ball nose cutters	B444
TM-4R		2	6.0-25.0		✓			✓		Torus mills	B445
TM-4RP		2	8.0-25.0		✓			✓		Torus mills	B447
TM-5R		2	6.0-10.0		✓			✓		Torus mills	B449
TM-7R		2	12.0-21.0		✓			✓		Torus mills	B450
TM-9R		2	25.0		✓			✓		Torus mills	B451
TM-5RP		2	8.0-10.0		✓			✓		Torus mills	B452
TM-7RP		2	12.0-20.0		✓			✓		Torus mills	B453
TM-9RP		2	25.0		✓			✓		Torus mills	B454



















✓ Very suitable    ✓ Suitable

## General machining

5501R302GM		2	3.0-20.0	✓	✓	✓				End mills	B283
5601R302GM		2	3.0-20.0	✓	✓	✓				End mills	B284
5502R302GM		2	1.0-20.0	✓	✓	✓				End mills	B285
5602R302GM		2	2.0-20.0	✓	✓	✓				End mills	B286
GM-2E		2	1.0-20.0	✓	✓	✓				End mills	B287
GM-2EL		2	3.0-20.0	✓	✓	✓				End mills	B288

✓ Very suitable    ✓ Suitable

## General machining

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
GM-2EX		2	3.0-20.0	✓	✓	✓				End mills	B289
GM-2EFP		2	6.0-16.0	✓	✓	✓				End mills	B290
GM-2F		2	1.0-20.0	✓	✓	✓				End mills	B291
GM-2FL		2	3.0-20.0	✓	✓	✓				End mills	B292
GM-2EP		2	0.5-5.0	✓	✓	✓				Mini end mills	B293
GM-2ES		2	0.3-3.0	✓	✓	✓				Mini end mills	B295
GM-3E		3	1.0-20.0	✓	✓	✓				End mills	B296
GM-3EL		3	3.0-20.0	✓	✓	✓				End mills	B297
5501R303GM		3	3.0-20.0	✓	✓	✓				End mills	B298
5601R303GM		3	3.0-20.0	✓	✓	✓				End mills	B299
5502R303GM		3	3.0-20.0	✓	✓	✓				End mills	B300
5602R303GM		3	3.0-20.0	✓	✓	✓				End mills	B301
5502R453GM		3	3.0-20.0	✓	✓	✓				End mills	B302
5602R453GM		3	3.0-20.0	✓	✓	✓				End mills	B303
GM-4F-G		4	1.0-20.0	✓	✓	✓				End mills	B304
GM-4EL-G		4	3.0-20.0	✓	✓	✓				End mills	B305
GM-4FL-G		4	3.0-16.0	✓	✓	✓				End mills	B306
GM-4EX-G		4	3.0-20.0	✓	✓	✓				End mills	B307
GM-4E		4	1.0-20.0	✓	✓	✓				End mills	B308
GM-4E-G		4	1.0-20.0	✓	✓	✓				End mills	B309
GM-4EL		4	3.0-20.0	✓	✓	✓				End mills	B310

✓ Very suitable    ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling








**D**

Technical Information

**E**

Index







## General machining

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
GM-4EFP		4	6.0-20.0	✓	✓	✓				End mills	B311
5501R304GF		4	3.0-20.0	✓	✓	✓				End mills	B312
5601R304GF		4	3.0-20.0	✓	✓	✓				End mills	B313
5502R304GF		4	3.0-20.0	✓	✓	✓				End mills	B314
5602R304GF		4	3.0-20.0	✓	✓	✓				End mills	B315
5508R454GM		4	3.0-20.0	✓	✓	✓				End mills	B316
5602R454GM		4	3.0-20.0	✓	✓	✓				End mills	B317
5589R45MGFR		6-10	6.0-12.0	✓	✓	✓				End mills	B318
GM-6E		6	6.0-20.0	✓	✓	✓				End mills	B319
GM-6EL		6	6.0-20.0	✓	✓	✓				End mills	B320
5565R302GF		2	3.0-20.0	✓	✓	✓				Ball nose cutters	B321
5665R202GM		2	3.0-20.0	✓	✓	✓				Ball nose cutters	B322
5566R302GF		2	3.0-12.0	✓	✓	✓				Ball nose cutters	B323
GM-2B		2	1.0-20.0	✓	✓	✓				Ball nose cutters	B324
GM-2BL		2	2.0-20.0	✓	✓	✓				Ball nose cutters	B325
GM-2BFP		2	1.0-20.0	✓	✓	✓				Ball nose cutters	B326
GM-2BS		2	0.3-3.0	✓	✓	✓				Mini ball nose cutters	B327
GM-2BP		2	0.5-5.0	✓	✓	✓				Mini ball nose cutters	B328
GM-4B		4	3.0-20.0	✓	✓	✓				Ball nose cutters	B330
GM-4BL		4	3.0-20.0	✓	✓	✓				Ball nose cutters	B331
GM-2R		2	1.0-12.0	✓	✓	✓				Torus mills	B332

✓ Very suitable    ✓ Suitable















A  
Turning  
B  
Milling  
C  
Drilling  
D  
Technical Information  
E  
Index

## General machining

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
GM-4R		4	3.0-12.0	✓	✓	✓				Torus mills	B333
GM-4RL		4	6.0-16.0	✓	✓	✓				Torus mills	B334
5602R303GR		3	6.0-8.0	✓	✓	✓				Rippers	B335
5602R304GR		4	10.0-20.0	✓	✓	✓				Rippers	B336
5602R305GR		5	25.0	✓	✓	✓				Rippers	B337
GM-4W		4	6.0-20.0	✓	✓	✓				Rippers	B338

✓ Very suitable    ✓ Suitable

## Machining high hardness steel

HM-2E		2	1.0-20.0						✓	End mills	B389
HM-2EFP		2	6.0-20.0						✓	End mills	B390
HM-2EP		2	0.5-5.0						✓	Mini end mills	B391
HM-2ES		2	0.3-3.0						✓	Mini end mills	B393
HM-4E		4	1.0-20.0						✓	End mills	B394
HM-4EL		4	3.0-20.0						✓	End mills	B395
HM-4EFP		4	6.0-20.0						✓	End mills	B396
5502R55MHH		4-8	3.0-20.0						✓	End mills	B397
HM-6E		6	6.0-20.0						✓	End mills	B398
HM-6EL		6	6.0-20.0						✓	End mills	B399
HM-2B		2	1.0-20.0						✓	Ball nose cutters	B400
HM-2BL		2	2.0-20.0						✓	Ball nose cutters	B401
HM-2BFP		2	1.0-20.0						✓	Ball nose cutters	B402
HM-2BS		2	0.3-3.0						✓	Mini ball nose cutters	B403

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical  
Information

E







Index



**A**

Turning

## Machining high hardness steel







Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
HM-2BP		2	0.5-5.0						✓	Mini ball nose cutters	B404
HM-4B		4	3.0-20.0						✓	Ball nose cutters	B406
HM-4BL		4	3.0-20.0						✓	Ball nose cutters	B407
HM-4R		4	3.0-12.0						✓	Torus mills	B408
HM-4RF		4	6.0-12.0						✓	Torus mills	B409
HM-4RP		4	6.0-16.0						✓	Torus mills	B410

✓ Very suitable    ✓ Suitable

**B**

Milling

## Copper and copper alloys

5502R402NM		2	3.0-20.0				✓			End mills	B411
NM-2E		2	1.0-12.0				✓			End mills	B412
NM-2EP		2	0.5-5.0				✓			Mini end mills	B413
NM-4E		4	3.0-12.0				✓			End mills	B414
NM-2B		2	1.0-12.0				✓			Ball nose cutters	B415
NM-2BP		2	0.5-5.0				✓			Mini ball nose cutters	B416

✓ Very suitable    ✓ Suitable

**C**

Drilling

**D**

Technical Information

## Aluminium and aluminium alloys















AL-2E		2	1.0-20.0				✓			End mills	B417
AL-2EL		2	3.0-20.0				✓			End mills	B418
AL-3E		3	1.0-20.0				✓			End mills	B419
AL-3EL		3	3.0-20.0				✓			End mills	B420
AL-3W		3	6.0-20.0				✓			Rippers	B421
5565R302NH		2	3.0-16.0				✓			Ball nose cutters	B422
5566R302NH		2	3.0-16.0				✓			Ball nose cutters	B423

✓ Very suitable    ✓ Suitable

**E**

Index

## Aluminium and aluminium alloys

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
AL-2B		2	2.0-12.0				✓			Ball nose cutters	B424
AL-2R-AIR		2	6.0-20.0				✓			High performance torus mills	B425
AL-2RL-AIR		2	6.0-20.0				✓			High performance torus mills	B426
AL-3R-AIR		3	12.0-20.0				✓			High performance torus mills	B427
AL-3RL-AIR		3	12.0-20.0				✓			High performance torus mills	B428
ALG-2E		2	1.0-20.0				✓			End mills	B429
ALG-3E		3	1.0-20.0				✓			End mills	B430
ALG-3E-W		3	3.0-20.0				✓			End mills	B431
ALP-3E		3	1.0-20.0				✓			End mills	B432
ALP-3E-W		3	3.0-20.0				✓			End mills	B433
ALP-4E		4	3.0-20.0				✓			End mills	B434
ALP-4E-W		4	3.0-20.0				✓			End mills	B435
ALG-2R		2	6.0-25.0				✓			Torus mills	B436
ALG-2R-W		2	6.0-25.0				✓			Torus mills	B437

✓ Very suitable    ✓ Suitable

## HPC with unequal helix angle

5501R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B455
5502R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B456
5601R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B457
5602R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B458
5502R38414GM-R		4	4.0-20.0	✓	✓	✓			✓	Torus mills	B459
5602R38414GM-R		4	4.0-20.0	✓	✓	✓			✓	Torus mills	B460

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical  
Information

E





Index

## HPC with unequal helix angle

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
UM-4E		4	4.0-20.0	✓	✓	✓			✓	End mills	B461
UM-4E-W		4	4.0-20.0	✓	✓	✓			✓	End mills	B462
UM-4EL		4	4.0-20.0	✓	✓	✓			✓	End mills	B463
UM-4EL-W		4	4.0-20.0	✓	✓	✓			✓	End mills	B464
UM-4ELP-W		4	4.0-20.0	✓	✓	✓			✓	End mills	B465
UM-4EFP		4	6.0-20.0	✓	✓	✓			✓	End mills	B466
UM-4R		4	4.0-20.0	✓	✓	✓			✓	Torus mills	B467
UM-4RL		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B468
UM-4RFP		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B469
UM-5EP-W		5	6.0-25.0	✓	✓	✓			✓	End mills	B470
UMC-4E		4	6.0-20.0	✓	✓	✓			✓	End mills	B471
UMC-4E-W		4	6.0-20.0	✓	✓	✓			✓	End mills	B472
VSM-4E		4	4.0-20.0	✓	✓			✓		End mills	B473
VSM-4E-C		4	10.0-20.0	✓	✓			✓		End mills	B474
VSM-4R		4	4.0-20.0	✓	✓			✓		Torus mills	B475

✓ Very suitable    ✓ Suitable

## Deburring cutter

5501/5601		3-4	0.2-0.7	✓	✓	✓	✓			Deburring cutters	B477
5501/5601		3-4	0.2-0.7	✓	✓	✓	✓			Deburring cutters	B478
5501/5601		3-4	0.2-0.7	✓	✓	✓	✓			Deburring cutters	B479
5601		4	5.2-10.0	✓	✓	✓	✓			Deburring cutters	B480

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling










D

Technical Information

E

Index

## QCH series

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
PM-2B		2	12.0-32.0	✓	✓	✓			✓	Ball nose cutters	B481
PM-4B		4	12.0-32.0	✓	✓	✓			✓	Ball nose cutters	B482
PM-4E		4	12.0-32.0	✓	✓	✓			✓	End mills	B483
PM-4R		4	12.0-32.0	✓	✓	✓			✓	Torus mills	B484
HMX-2B		2	12.0-32.0						✓	Ball nose cutters	B486
HMX-4B		4	12.0-32.0						✓	Ball nose cutters	B487
HMX-4E		4	12.0-32.0						✓	End mills	B488
HMX-4R		4	12.0-32.0						✓	Torus mills	B489
VPM-4E		4	12.0-25.0	✓	✓	✓			✓	End mills	B485

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

A

Turning

## Coated cemented carbide PVD

Grade	Grade description
-------	-------------------

**KMD401** PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

B

Milling

**KMG303** PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.

**KMG405** PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.

C

Drilling

**KMG406** PVD coated carbide substrate for entry into high performance machining. Universal range of application for steel and cast materials up to 55 HRC as well as stainless steel.

**KMG555** PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.

D

Technical Information

**KMG309** PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.

## Uncoated cemented carbide

Grade	Grade description
-------	-------------------

**YK30F** Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.

E

Index

**Uncoated cemented carbide**

Grade	Grade description
<b>YK40F</b>	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.

**A**

Turning

**B**

Milling

**C**

Drilling

**D**Technical  
Information**E**

Index

**5 5 0 1 R 30 2 GM R05 0800**

**1 2 3 4 5 6 7 8 9 10**

**A**

Turning

Type	
Code	Description
5	Milling cutter

Shank type	
Code	Description
1	Shank
5	DIN 6535 HA
6	Weldon shank DIN 6535 HB
7	Whistle Notch DIN 6535 HE
9	Morse taper shank

**B**

**1**

**2**

Milling

Cutting edge type	
Code	Description
0	Square shoulder mill
6	Ball nose cutter
8	Torus mill

Tool length	
Code	Description
1	DIN 6527 K
2	DIN 6527 L
5	Factory standard ZCC-A
6	Factory standard ZCC-B
8	DIN 6528
9	Factory standard ZCC-D

**3**

**4**

**C**

Drilling

Rotation direction	
Code	Description
R	Right
L	Left

Helix angle	
Code	Description
20	20°
30	30°
3841	38°/41°
45	45°
55	55°
60	60°

Number of teeth	
Code	Description
2	2
...	
M	Indicated when different diameters have a different number of teeth

**5**

**6**

**7**

**D**

Technical Information

Application	
Code	Description
GM	Semi-finishing
GF	Finishing
HM	Hard machining
MHH	High-speed hard machining
NH	High-performance machining of heat-resistant alloys

Radius [mm]	
Code	Description
R03	0,3
R15	1,5
R30	3,0
...	

Diameter [mm]	
Code	Description
0100	1,0
0800	8,0
2000	20,0
...	


**8**

**9**

**10**

**E**

Index



a Groove milling  
g Plunge milling  
b Square shoulder milling  
h Circular milling/Ramping  
c Profile milling  
d Slot milling  
e Face milling  
f Chamfer milling

# GM – 2 E L P – D12 R0.5 – M08

**1**      **2**      **3**      **4**      **5**      **6**      **7**      **8**

Application	
Code	Description
GR	General roughing
GM	Semi-finishing
GF	Finishing
PM	High-performance machining
EPM	«Ecoline» – High-performance machining
VPM	Full-slot applications
HM	Hard machining
NM	General machining of non-ferrous metals
AL	General machining of Al and Al alloys
ALP	High-performance machining of Al and Al alloys
ALG	General machining of Al and Al alloys
UM	HSC/HPC machining
UMC	HSC machining with chip splitter geometry
VSM	General machining of heat-resistant alloys
TM	General machining of heat-resistant alloys

Number of teeth

**1**      **2**

Cutting edge type	
Code	Description
E	Square shoulder mill with protective chamfer
F	Square shoulder mill with sharp cutting edges
B	Ball nose cutter
R	Torus mill
W	Ripper
H	High-feed mill

**3**

Cutting edge length	
Code	Description
L	Long
X	Extra long
F	Short

**4**

Type	
Code	Description
S	Mini diameter
P	Ground neck
C	Conical neck

**5**

Diameter [mm]	
Code	Description
D3.0	3,0
D20.0	20,0
...	


**6**

Radius [mm]	
Code	Description
R0.5	0,5
R3.0	3,0
...	

**7**

Features	
Code	Description
G	Spiral angle 30°
M	Neck length [mm]
S	Thin shank
AIR	For aerospace industry

**8**

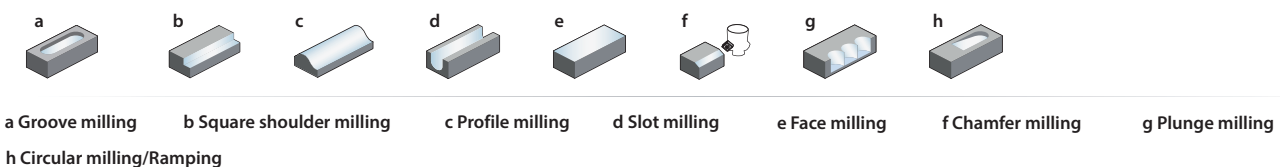

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index



**Q 08 – PM – 2 B – D12 R0.5**

1

2

3

4

5

6

7

Thread type

**Thread diameter [mm]**

Code	Description
08	8,0
10	10,0
12	12,0
14	14,0
18	18,0

**Application**

Code	Description
PM	High-performance machining
HMX	Hard machining

1

2

3

Number of teeth

**Cutting edge type**

Code	Description
E	Square shoulder mill with protective chamfer
B	Ball nose cutter
R	Torus mill

**Diameter [mm]**

Code	Description
D3.0	3,0
D8.0	8,0
D20.0	20,0

4

5

6

**Radius [mm]**

Code	Description
R0.5	0,5
R1.0	1,5
R3.0	3,0
...	

7



a Groove milling

b Square shoulder milling

c Profile milling

d Slot milling

e Face milling

f Chamfer milling

g Plunge milling

h Circular milling/Ramping

# G 25 – QCH – Q 12 – 250 C – (ZJ) (115)

1

2

3

4

5

6

7

8

9

Clamping form	
Code	Description
<b>G</b>	Cylindrical
<b>XP</b>	Weldon

1

Clamping diameter [mm]	
Code	Description
<b>12</b>	12
<b>16</b>	16
<b>20</b>	20
<b>25</b>	25
<b>32</b>	32

2

Series [mm]	
Code	Description
<b>QCH</b>	Indexable head system

3

Thread type	
Code	Description
<b>M</b>	Metric
<b>Q</b>	Q thread

4

Thread size [mm]	
Code	Description
<b>8</b>	8
<b>10</b>	10
<b>12</b>	12
<b>14</b>	14
...	

5

Total length [mm]	
Code	Description
<b>85</b>	85
<b>150</b>	150
<b>200</b>	200
...	

6

Material	
Code	Description
<b>C</b>	Solid carbide
<b>S</b>	Steel

7

Shank	
Code	Description
<b>ZJ</b>	Conical
<b>-</b>	Cylindrically stepped

8

Taper length [mm]	
Code	Description
<b>90</b>	90
<b>115</b>	115
...	

9

A

Turning

B

Milling

C

Drilling

D

Technical  
Information

E

Index

## Notes

**A**

Turning

**B**

Milling

**C**

Drilling

**D**


Technical  
Information

**E**




Index

**End mill** **Semi-finishing**

**5501R302GM**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5501R302GM-0300		3	6	4	50	0	0	2	●	○
5501R302GM-0400		4	6	5	54	0	0	2	●	○
5501R302GM-0500		5	6	6	54	0	0	2	●	○
5501R302GM-0600		6	6	7	54	45	0.1	2	●	○
5501R302GM-0800		8	8	9	58	45	0.1	2	●	○
5501R302GM-1000		10	10	11	66	45	0.1	2	●	○
5501R302GM-1200		12	12	12	73	45	0.1	2	●	○
5501R302GM-1400		14	14	14	75	45	0.15	2	●	○
5501R302GM-1600		16	16	16	82	45	0.15	2	●	○
5501R302GM-1800		18	18	18	84	45	0.15	2	●	○
5501R302GM-2000		20	20	20	92	45	0.15	2	●	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541






**A**

## End mill Semi-finishing

### 5601R302GM



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5601R302GM-0300		3	6	4	50	0	0	2	●
5601R302GM-0400		4	6	5	54	0	0	2	●
5601R302GM-0500		5	6	6	54	0	0	2	●
5601R302GM-0600		6	6	7	54	45	0.1	2	●
5601R302GM-0800		8	8	9	58	45	0.1	2	●
5601R302GM-1000		10	10	11	66	45	0.1	2	●
5601R302GM-1200		12	12	12	73	45	0.1	2	●
5601R302GM-1400		14	14	14	75	45	0.15	2	●
5601R302GM-1600		16	16	16	82	45	0.15	2	●
5601R302GM-1800		18	18	18	84	45	0.15	2	●
5601R302GM-2000		20	20	20	92	45	0.15	2	●

● Ex stock   ○ On demand

\* With internal cooling

Milling

**C**

#### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492




Nonstandard order > B541

**End mill long cutting edge** **Semi-finishing**

**5502R302GM**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5502R302GM-0100		1	3	2	38	0	0	2	●	○
5502R302GM-0150		1.5	3	3	38	0	0	2	●	○
5502R302GM-0200		2	6	6	57	0	0	2	●	○
5502R302GM-0250		2.5	6	7	57	0	0	2	●	○
5502R302GM-0280		2.8	6	7	57	0	0	2	●	○
5502R302GM-0300		3	6	7	57	0	0	2	●	○
5502R302GM-0350		3.5	6	7	57	0	0	2	●	○
5502R302GM-0380		3.8	6	8	57	0	0	2	●	○
5502R302GM-0400		4	6	8	57	0	0	2	●	○
5502R302GM-0450		4.5	6	8	57	0	0	2	●	○
5502R302GM-0480		4.8	6	8	57	0	0	2	●	○
5502R302GM-0500		5	6	10	57	0	0	2	●	○
5502R302GM-0550		5.5	6	10	57	0	0	2	●	○
5502R302GM-0575		5.75	6	10	57	0	0	2	●	○
5502R302GM-0600		6	6	10	57	45	0.1	2	●	○
5502R302GM-0675		6.75	8	13	63	45	0.1	2	○	○
5502R302GM-0700		7	8	13	63	45	0.1	2	●	○
5502R302GM-0750		7.5	8	16	63	45	0.1	2	●	○
5502R302GM-0775		7.75	8	16	63	45	0.1	2	●	○
5502R302GM-0800		8	8	16	63	45	0.1	2	●	○
5502R302GM-0870		8.7	10	16	72	45	0.1	2	●	○
5502R302GM-0900		9	10	16	72	45	0.1	2	●	○
5502R302GM-0950		9.5	10	16	72	45	0.1	2	○	○
5502R302GM-1000		10	10	19	72	45	0.1	2	●	○
5502R302GM-1100		11	12	22	83	45	0.1	2	●	○
5502R302GM-1170		11.7	12	22	83	45	0.1	2	●	○
5502R302GM-1200		12	12	22	83	45	0.1	2	●	○
5502R302GM-1370		13.7	14	22	83	45	0.1	2	●	○
5502R302GM-1400		14	14	22	83	45	0.15	2	●	○
5502R302GM-1500		15	16	26	92	45	0.15	2	●	○
5502R302GM-1570		15.7	16	26	92	45	0.15	2	●	○
5502R302GM-1600		16	16	26	92	45	0.15	2	●	○
5502R302GM-1700		17	18	26	92	45	0.15	2	○	○
5502R302GM-1800		18	18	26	92	45	0.15	2	●	○
5502R302GM-2000		20	20	32	104	45	0.15	2	●	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index



**A**

## End mill long cutting edge Semi-finishing

### 5602R302GM



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade KMG303
		D	d (h6)	H	L	KCH	CHW		
5602R302GM-0200		2	6	6	57	0	0	2	●
5602R302GM-0250		2.5	6	7	57	0	0	2	●
5602R302GM-0280		2.8	6	7	57	0	0	2	●
5602R302GM-0300		3	6	7	57	0	0	2	●
5602R302GM-0350		3.5	6	7	57	0	0	2	●
5602R302GM-0380		3.8	6	8	57	0	0	2	●
5602R302GM-0400		4	6	8	57	0	0	2	●
5602R302GM-0450		4.5	6	8	57	0	0	2	●
5602R302GM-0480		4.8	6	8	57	0	0	2	●
5602R302GM-0500		5	6	10	57	0	0	2	●
5602R302GM-0550		5.5	6	10	57	0	0	2	●
5602R302GM-0575		5.75	6	10	57	0	0	2	●
5602R302GM-0600		6	6	10	57	45	0.1	2	●
5602R302GM-0675		6.75	8	13	63	45	0.1	2	○
5602R302GM-0700		7	8	13	63	45	0.1	2	●
5602R302GM-0750		7.5	8	16	63	45	0.1	2	●
5602R302GM-0775		7.75	8	16	63	45	0.1	2	○
5602R302GM-0800		8	8	16	63	45	0.1	2	●
5602R302GM-0870		8.7	10	16	72	45	0.1	2	●
5602R302GM-0900		9	10	16	72	45	0.1	2	●
5602R302GM-1000		10	10	19	72	45	0.1	2	●
5602R302GM-1170		11.7	12	22	83	45	0.1	2	●
5602R302GM-1200		12	12	22	83	45	0.1	2	●
5602R302GM-1370		13.7	14	22	83	45	0.1	2	●
5602R302GM-1400		14	14	22	83	45	0.15	2	●
5602R302GM-1570		15.7	16	26	92	45	0.15	2	●
5602R302GM-1600		16	16	26	92	45	0.15	2	●
5602R302GM-1800		18	18	26	92	45	0.15	2	●
5602R302GM-2000		20	20	32	104	45	0.15	2	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **Semi-finishing**

GM-2E



- Factory standard
- Centre cutting
- Helix angle 35°

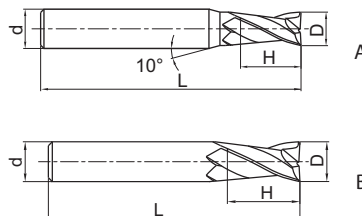

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-2E-D1.0S		1	4	3	50	2	A	●
GM-2E-D1.5S		1.5	4	4	50	2	A	●
GM-2E-D2.0S		2	4	6	50	2	A	●
GM-2E-D2.5S		2.5	4	8	50	2	A	●
GM-2E-D3.0S		3	4	8	50	2	A	●
GM-2E-D4.0S		4	4	11	50	2	B	●
GM-2E-D1.0		1	6	3	50	2	A	●
GM-2E-D1.5		1.5	6	4	50	2	A	●
GM-2E-D2.0		2	6	6	50	2	A	●
GM-2E-D2.5		2.5	6	8	50	2	A	●
GM-2E-D3.0		3	6	8	50	2	A	●
GM-2E-D3.5		3.5	6	10	50	2	A	●
GM-2E-D4.0		4	6	11	50	2	A	●
GM-2E-D4.5		4.5	6	11	50	2	A	●
GM-2E-D5.0		5	6	13	50	2	A	●
GM-2E-D5.5		5.5	6	16	50	2	A	●
GM-2E-D6.0		6	6	16	50	2	B	●
GM-2E-D7.0		7	8	20	60	2	A	●
GM-2E-D8.0		8	8	20	60	2	B	●
GM-2E-D9.0		9	10	22	75	2	A	●
GM-2E-D10.0		10	10	25	75	2	B	●
GM-2E-D11.0		11	12	26	75	2	A	●
GM-2E-D12.0		12	12	30	75	2	B	●
GM-2E-D14.0		14	14	32	75	2	B	●
GM-2E-D16.0		16	16	45	100	2	B	●
GM-2E-D18.0		18	18	45	100	2	B	●
GM-2E-D20.0		20	20	45	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## End mill long cutting edge Semi-finishing

**GM-2EL**



- Factory standard
- Centre cutting
- Helix angle 35°

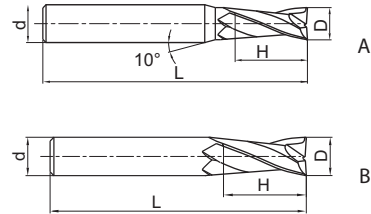

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-2EL-D3.0		3	6	12	75	2	A	●
GM-2EL-D4.0		4	6	15	75	2	A	●
GM-2EL-D5.0		5	6	20	75	2	A	●
GM-2EL-D6.0		6	6	20	75	2	B	●
GM-2EL-D8.0		8	8	25	100	2	B	●
GM-2EL-D10.0		10	10	30	100	2	B	●
GM-2EL-D12.0		12	12	35	100	2	B	●
GM-2EL-D14.0		14	14	40	100	2	B	●
GM-2EL-D16.0		16	16	50	150	2	B	●
GM-2EL-D20.0		20	20	55	150	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill extra long cutting edge **Semi-finishing**

**GM-2EX**



- Factory standard
- Centre cutting
- Helix angle 35°

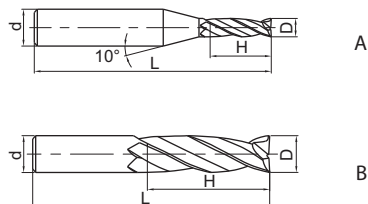

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-2EX-D3.0		3	6	20	75	2	A	●
GM-2EX-D4.0		4	6	25	75	2	A	●
GM-2EX-D5.0		5	6	30	75	2	A	●
GM-2EX-D6.0		6	6	30	75	2	B	○
GM-2EX-D8.0		8	8	40	100	2	B	○
GM-2EX-D10.0		10	10	50	110	2	B	○
GM-2EX-D12.0		12	12	50	110	2	B	○
GM-2EX-D16.0		16	16	70	150	2	B	○
GM-2EX-D20.0		20	20	75	150	2	B	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**A**

## End mill short cutting edge Semi-finishing

**GM-2EFP**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG303
GM-2EFP-D6.0		6	6	5.8	9	30	75	2	○
GM-2EFP-D8.0		8	8	7.8	12	40	100	2	○
GM-2EFP-D10.0		10	10	9.6	15	50	100	2	○
GM-2EFP-D12.0		12	12	11.5	18	50	100	2	○
GM-2EFP-D16.0		16	16	15.5	24	50	150	2	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **Semi-finishing**

**GM-2F**



- Factory standard
- Centre cutting
- Helix angle 35°

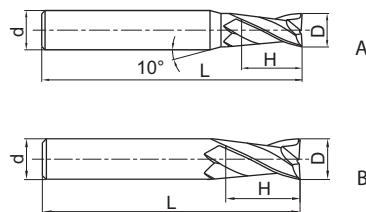

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-2F-D1.0		1	6	3	50	2	A	○
GM-2F-D1.5		1.5	6	4	50	2	A	○
GM-2F-D2.0		2	6	6	50	2	A	○
GM-2F-D2.5		2.5	6	8	50	2	A	○
GM-2F-D3.0		3	6	8	50	2	A	●
GM-2F-D3.5		3.5	6	10	50	2	A	○
GM-2F-D4.0		4	6	11	50	2	A	●
GM-2F-D4.5		4.5	6	11	50	2	A	●
GM-2F-D5.0		5	6	13	50	2	A	●
GM-2F-D5.5		5.5	6	16	50	2	A	○
GM-2F-D6.0		6	6	16	50	2	B	●
GM-2F-D7.0		7	8	20	60	2	A	●
GM-2F-D8.0		8	8	20	60	2	B	●
GM-2F-D9.0		9	10	22	75	2	A	○
GM-2F-D10.0		10	10	25	75	2	B	○
GM-2F-D11.0		11	12	26	75	2	A	○
GM-2F-D12.0		12	12	30	75	2	B	●
GM-2F-D14.0		14	14	32	75	2	B	○
GM-2F-D16.0		16	16	45	100	2	B	○
GM-2F-D18.0		18	18	45	100	2	B	○
GM-2F-D20.0		20	20	45	100	2	B	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




A

## End mill long cutting edge Semi-finishing

GM-2FL



- Factory standard
- Centre cutting
- Helix angle 35°

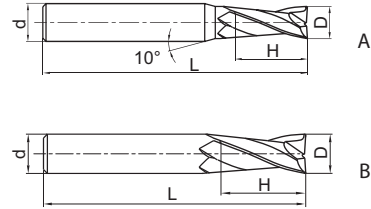

Turning

B

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-2FL-D3.0		3	6	12	75	2	A	○
GM-2FL-D4.0		4	6	15	75	2	A	○
GM-2FL-D5.0		5	6	20	75	2	A	○
GM-2FL-D6.0		6	6	20	75	2	B	○
GM-2FL-D8.0		8	8	25	100	2	B	○
GM-2FL-D10.0		10	10	30	100	2	B	○
GM-2FL-D12.0		12	12	35	100	2	B	○
GM-2FL-D14.0		14	14	40	100	2	B	○
GM-2FL-D16.0		16	16	50	150	2	B	○
GM-2FL-D20.0		20	20	55	150	2	B	○

● Ex stock ○ On demand

\* With internal cooling

C

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

D

Technical Information

E

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **Semi-finishing**

**GM-2EP**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG303
GM-2EP-D0.5-M04		0.5	4	0.45	0.7	4	50	2	●
GM-2EP-D0.5-M06		0.5	4	0.45	0.7	6	50	2	●
GM-2EP-D0.5-M08		0.5	4	0.45	0.7	8	50	2	●
GM-2EP-D0.8-M04		0.8	4	0.75	1.2	4	50	2	●
GM-2EP-D0.8-M06		0.8	4	0.75	1.2	6	50	2	●
GM-2EP-D0.8-M08		0.8	4	0.75	1.2	8	50	2	●
GM-2EP-D0.8-M10		0.8	4	0.75	1.2	10	50	2	●
GM-2EP-D1.0-M04		1	4	0.95	1.5	4	50	2	●
GM-2EP-D1.0-M06		1	4	0.95	1.5	6	50	2	●
GM-2EP-D1.0-M08		1	4	0.95	1.5	8	50	2	●
GM-2EP-D1.0-M10		1	4	0.95	1.5	10	50	2	●
GM-2EP-D1.0-M12		1	4	0.95	1.5	12	50	2	●
GM-2EP-D1.0-M14		1	4	0.95	1.5	14	50	2	●
GM-2EP-D1.2-M06		1.2	4	1.15	1.8	6	50	2	●
GM-2EP-D1.2-M08		1.2	4	1.15	1.8	8	50	2	●
GM-2EP-D1.2-M10		1.2	4	1.15	1.8	10	50	2	●
GM-2EP-D1.2-M12		1.2	4	1.15	1.8	12	50	2	○
GM-2EP-D1.5-M06		1.5	4	1.45	2.3	6	50	2	●
GM-2EP-D1.5-M08		1.5	4	1.45	2.3	8	50	2	●
GM-2EP-D1.5-M10		1.5	4	1.45	2.3	10	50	2	●
GM-2EP-D1.5-M12		1.5	4	1.45	2.3	12	50	2	●
GM-2EP-D1.5-M14		1.5	4	1.45	2.3	14	50	2	●
GM-2EP-D2.0-M06		2	4	1.95	3	6	50	2	●
GM-2EP-D2.0-M08		2	4	1.95	3	8	50	2	●
GM-2EP-D2.0-M10		2	4	1.95	3	10	50	2	●
GM-2EP-D2.0-M12		2	4	1.95	3	12	50	2	●
GM-2EP-D2.0-M14		2	4	1.95	3	14	50	2	●
GM-2EP-D2.0-M16		2	4	1.95	3	16	50	2	●
GM-2EP-D2.5-M08		2.5	4	2.4	3.7	8	50	2	●
GM-2EP-D2.5-M10		2.5	4	2.4	3.7	10	50	2	●
GM-2EP-D2.5-M12		2.5	4	2.4	3.7	12	50	2	●
GM-2EP-D2.5-M14		2.5	4	2.4	3.7	14	50	2	●
GM-2EP-D2.5-M16		2.5	4	2.4	3.7	16	60	2	●
GM-2EP-D2.5-M18		2.5	4	2.4	3.7	18	60	2	●
GM-2EP-D2.5-M20		2.5	4	2.4	3.7	20	60	2	●
GM-2EP-D3.0-M06		3	6	2.85	4.5	6	50	2	●
GM-2EP-D3.0-M08		3	6	2.85	4.5	8	50	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541




A


End mill

Semi-finishing

GM-2EP



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

B

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG303
GM-2EP-D3.0-M10		3	6	2.85	4.5	10	50	2	●
GM-2EP-D3.0-M12		3	6	2.85	4.5	12	50	2	●
GM-2EP-D3.0-M14		3	6	2.85	4.5	14	60	2	●
GM-2EP-D3.0-M16		3	6	2.85	4.5	16	60	2	●
GM-2EP-D3.0-M18		3	6	2.85	4.5	18	60	2	●
GM-2EP-D3.0-M20		3	6	2.85	4.5	20	60	2	●
GM-2EP-D4.0-M12		4	6	3.85	6	12	50	2	●
GM-2EP-D4.0-M14		4	6	3.85	6	14	60	2	●
GM-2EP-D4.0-M16		4	6	3.85	6	16	60	2	●
GM-2EP-D4.0-M20		4	6	3.85	6	20	60	2	●
GM-2EP-D4.0-M25		4	6	3.85	6	25	60	2	●
GM-2EP-D5.0-M16		5	6	4.85	7.5	16	60	2	●
GM-2EP-D5.0-M25		5	6	4.85	7.5	25	70	2	●

● Ex stock ○ On demand

\* With internal cooling

Milling

C

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

D

Technical Information

F

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


Schaftfräser

Semi-finishing

GM-2ES



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG303
GM-2ES-D0.3		0.3	4	0.6	50	2	●
GM-2ES-D0.4		0.4	4	0.8	50	2	●
GM-2ES-D0.5		0.5	4	1	50	2	●
GM-2ES-D0.6		0.6	4	1.2	50	2	●
GM-2ES-D0.7		0.7	4	1.4	50	2	●
GM-2ES-D0.8		0.8	4	1.6	50	2	●
GM-2ES-D0.9		0.9	4	1.8	50	2	●
GM-2ES-D1.0		1	4	2	50	2	●
GM-2ES-D1.1		1.1	4	2	50	2	●
GM-2ES-D1.2		1.2	4	2.5	50	2	●
GM-2ES-D1.3		1.3	4	2.5	50	2	●
GM-2ES-D1.4		1.4	4	3	50	2	●
GM-2ES-D1.5		1.5	4	3	50	2	●
GM-2ES-D1.6		1.6	4	3.5	50	2	●
GM-2ES-D1.7		1.7	4	3.5	50	2	●
GM-2ES-D1.8		1.8	4	4	50	2	●
GM-2ES-D1.9		1.9	4	4	50	2	●
GM-2ES-D2.0		2	4	4	50	2	●
GM-2ES-D2.1		2.1	4	4	50	2	●
GM-2ES-D2.2		2.2	4	4.5	50	2	●
GM-2ES-D2.3		2.3	4	4.5	50	2	●
GM-2ES-D2.4		2.4	4	5	50	2	●
GM-2ES-D2.5		2.5	4	5	50	2	●
GM-2ES-D2.6		2.6	4	5	50	2	●
GM-2ES-D2.7		2.7	4	5.5	50	2	●
GM-2ES-D2.8		2.8	4	5.5	50	2	●
GM-2ES-D2.9		2.9	4	6	50	2	●
GM-2ES-D3.0		3	4	6	50	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541






A


End mill

Semi-finishing

GM-3E



- Factory standard
- Centre cutting
- Helix angle 45°

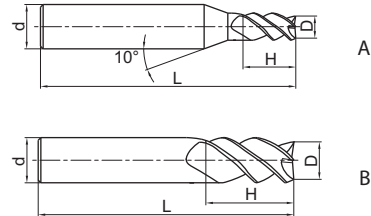

Turning

B

Milling

C

Drilling

D

Technical Information

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-3E-D1.0S		1	4	3	50	3	A	○
GM-3E-D1.5S		1.5	4	4	50	3	A	○
GM-3E-D2.0S		2	4	6	50	3	A	○
GM-3E-D2.5S		2.5	4	8	50	3	A	○
GM-3E-D3.0S		3	4	8	50	3	A	○
GM-3E-D4.0S		4	4	11	50	3	B	○
GM-3E-D1.0		1	6	3	50	3	A	○
GM-3E-D1.5		1.5	6	4	50	3	A	○
GM-3E-D2.0		2	6	6	50	3	A	○
GM-3E-D2.5		2.5	6	8	50	3	A	○
GM-3E-D3.0		3	6	8	50	3	A	○
GM-3E-D3.5		3.5	6	10	50	3	A	○
GM-3E-D4.0		4	6	11	50	3	A	○
GM-3E-D4.5		4.5	6	11	50	3	A	○
GM-3E-D5.0		5	6	13	50	3	A	○
GM-3E-D5.5		5.5	6	16	50	3	A	○
GM-3E-D6.0		6	6	16	50	3	B	○
GM-3E-D7.0		7	8	20	60	3	A	○
GM-3E-D8.0		8	8	20	60	3	B	○
GM-3E-D9.0		9	10	22	75	3	A	○
GM-3E-D10.0		10	10	25	75	3	B	○
GM-3E-D11.0		11	12	26	75	3	A	○
GM-3E-D12.0		12	12	30	75	3	B	○
GM-3E-D14.0		14	14	32	75	3	B	○
GM-3E-D16.0		16	16	45	100	3	B	○
GM-3E-D18.0		18	18	45	100	3	B	○
GM-3E-D20.0		20	20	45	100	3	B	○

● Ex stock ○ On demand

\* With internal cooling

E

Index

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541


End mill long cutting edge

Semi-finishing

GM-3EL



- Factory standard
- Centre cutting
- Helix angle 45°

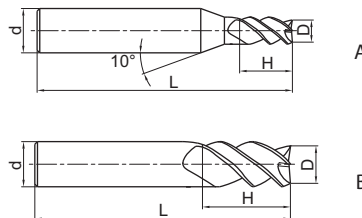

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-3EL-D3.0		3	6	12	75	3	A	●
GM-3EL-D4.0		4	6	15	75	3	A	●
GM-3EL-D5.0		5	6	20	75	3	A	●
GM-3EL-D6.0		6	6	20	75	3	B	●
GM-3EL-D8.0		8	8	25	100	3	B	●
GM-3EL-D10.0		10	10	30	100	3	B	●
GM-3EL-D12.0		12	12	35	100	3	B	●
GM-3EL-D14.0		14	14	40	100	3	B	●
GM-3EL-D16.0		16	16	50	150	3	B	●
GM-3EL-D20.0		20	20	55	150	3	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## End mill Semi-finishing

### 5501R303GM



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5501R303GM-0300		3	6	4	50	0	0	3	●	○
5501R303GM-0400		4	6	5	54	0	0	3	●	○
5501R303GM-0500		5	6	6	54	0	0	3	●	○
5501R303GM-0600		6	6	7	54	45	0.1	3	●	○
5501R303GM-0800		8	8	9	58	45	0.1	3	●	○
5501R303GM-1000		10	10	11	66	45	0.1	3	●	○
5501R303GM-1200		12	12	12	73	45	0.1	3	●	○
5501R303GM-1400		14	14	14	75	45	0.15	3	●	○
5501R303GM-1600		16	16	16	82	45	0.15	3	●	○
5501R303GM-1800		18	18	18	84	45	0.15	3	●	○
5501R303GM-2000		20	20	20	92	45	0.15	3	●	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

**End mill** **Semi-finishing**

**5601R303GM**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5601R303GM-0300		3	6	4	50	0	0	3	●
5601R303GM-0400		4	6	5	54	0	0	3	●
5601R303GM-0500		5	6	6	54	0	0	3	●
5601R303GM-0600		6	6	7	54	45	0.1	3	●
5601R303GM-0800		8	8	9	58	45	0.1	3	●
5601R303GM-1000		10	10	11	66	45	0.1	3	●
5601R303GM-1200		12	12	12	73	45	0.1	3	●
5601R303GM-1400		14	14	14	75	45	0.15	3	●
5601R303GM-1600		16	16	16	82	45	0.15	3	●
5601R303GM-1800		18	18	18	84	45	0.15	3	●
5601R303GM-2000		20	20	20	92	45	0.15	3	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## End mill long cutting edge Semi-finishing

### 5502R303GM



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5502R303GM-0300		3	6	7	57	0	0	3	●	○
5502R303GM-0400		4	6	8	57	0	0	3	●	○
5502R303GM-0500		5	6	10	57	0	0	3	●	○
5502R303GM-0600		6	6	10	57	45	0.1	3	●	○
5502R303GM-0800		8	8	16	63	45	0.1	3	●	○
5502R303GM-1000		10	10	19	72	45	0.1	3	●	○
5502R303GM-1200		12	12	22	83	45	0.1	3	●	○
5502R303GM-1300		13	14	22	83	45	0.1	3	○	○
5502R303GM-1400		14	14	22	83	45	0.15	3	●	○
5502R303GM-1600		16	16	26	92	45	0.15	3	●	○
5502R303GM-1800		18	18	26	92	45	0.15	3	●	○
5502R303GM-2000		20	20	32	104	45	0.15	3	●	○

Milling

**C**

- Ex stock ○ On demand
- \* With internal cooling

Drilling

**D**

### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Technical Information

**E**

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

End mill long cutting edge **Semi-finishing**

**5602R303GM**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5602R303GM-0300		3	6	7	57	0	0	3	●
5602R303GM-0400		4	6	8	57	0	0	3	●
5602R303GM-0500		5	6	10	57	0	0	3	●
5602R303GM-0600		6	6	10	57	45	0.1	3	●
5602R303GM-0800		8	8	16	63	45	0.1	3	●
5602R303GM-1000		10	10	19	72	45	0.1	3	●
5602R303GM-1200		12	12	22	83	45	0.1	3	●
5602R303GM-1400		14	14	22	83	45	0.15	3	●
5602R303GM-1600		16	16	26	92	45	0.15	3	●
5602R303GM-1800		18	18	26	92	45	0.15	3	●
5602R303GM-2000		20	20	32	104	45	0.15	3	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## End mill long cutting edge Semi-finishing

**5502R453GM**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 45°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG405
5502R453GM-0300		3	6	7	57	0	0	3	●
5502R453GM-0400		4	6	8	57	0	0	3	●
5502R453GM-0500		5	6	10	57	0	0	3	●
5502R453GM-0600		6	6	10	57	45	0.1	3	●
5502R453GM-0800		8	8	16	63	45	0.1	3	●
5502R453GM-1000		10	10	19	72	45	0.1	3	●
5502R453GM-1200		12	12	22	83	45	0.1	3	●
5502R453GM-1400		14	14	22	83	45	0.15	3	●
5502R453GM-1600		16	16	26	92	45	0.15	3	●
5502R453GM-1800		18	18	26	92	45	0.15	3	●
5502R453GM-2000		20	20	32	104	45	0.15	3	●

● Ex stock   ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492




Nonstandard order > B541

End mill long cutting edge **Semi-finishing**

**5602R453GM**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	KMG405
5602R453GM-0300		3	6	7	57	0	0	3	○	●
5602R453GM-0400		4	6	8	57	0	0	3	○	●
5602R453GM-0500		5	6	10	57	0	0	3	○	●
5602R453GM-0600		6	6	10	57	45	0.1	3	○	●
5602R453GM-0800		8	8	16	63	45	0.1	3	○	●
5602R453GM-1000		10	10	19	72	45	0.1	3	○	●
5602R453GM-1200		12	12	22	83	45	0.1	3	○	●
5602R453GM-1400		14	14	22	83	45	0.15	3	○	●
5602R453GM-1600		16	16	26	92	45	0.15	3	○	●
5602R453GM-1800		18	18	26	92	45	0.15	3	○	●
5602R453GM-2000		20	20	32	104	45	0.15	3	○	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541




A



End mill

Semi-finishing

GM-4F-G



- Factory standard
- Centre cutting
- Helix angle 30°



Turning

B

Milling

C

Drilling

D

Technical Information

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4F-D2.0S-G		2	4	6	50	4	A	○
GM-4F-D2.5S-G		2.5	4	8	50	4	A	○
GM-4F-D4.0S-G		4	4	11	50	4	B	○
GM-4F-D1.0-G		1	6	3	50	4	A	○
GM-4F-D1.5-G		1.5	6	4	50	4	A	○
GM-4F-D2.0-G		2	6	6	50	4	A	○
GM-4F-D2.5-G		2.5	6	8	50	4	A	○
GM-4F-D3.0-G		3	6	8	50	4	A	○
GM-4F-D3.5-G		3.5	6	10	50	4	A	○
GM-4F-D4.0-G		4	6	11	50	4	A	○
GM-4F-D4.5-G		4.5	6	11	50	4	A	○
GM-4F-D5.0-G		5	6	13	50	4	A	○
GM-4F-D5.5-G		5.5	6	16	50	4	A	○
GM-4F-D6.0-G		6	6	16	50	4	B	○
GM-4F-D7.0-G		7	8	20	60	4	A	○
GM-4F-D8.0-G		8	8	20	60	4	B	○
GM-4F-D9.0-G		9	10	22	75	4	A	○
GM-4F-D10.0-G		10	10	25	75	4	B	○
GM-4F-D11.0-G		11	12	26	75	4	A	○
GM-4F-D12.0-G		12	12	30	75	4	B	○
GM-4F-D14.0-G		14	14	32	75	4	B	○
GM-4F-D16.0-G		16	16	45	100	4	B	○
GM-4F-D18.0-G		18	18	45	100	4	B	○
GM-4F-D20.0-G		20	20	45	100	4	B	○

● Ex stock ○ On demand

\* With internal cooling

E

Index

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541



End mill long cutting edge

Semi-finishing

**GM-4EL-G**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4EL-D3.0-G		3	6	12	75	4	A	○
GM-4EL-D4.0-G		4	6	15	75	4	A	○
GM-4EL-D5.0-G		5	6	20	75	4	A	○
GM-4EL-D6.0-G		6	6	20	75	4	B	○
GM-4EL-D8.0-G		8	8	25	100	4	B	○
GM-4EL-D10.0-G		10	10	30	100	4	B	○
GM-4EL-D12.0-G		12	12	35	100	4	B	○
GM-4EL-D14.0-G		14	14	40	100	4	B	○
GM-4EL-D16.0-G		16	16	50	150	4	B	○
GM-4EL-D20.0-G		20	20	55	150	4	B	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541

**A**



End mill long cutting edge

Semi-finishing

**GM-4FL-G**



- Factory standard
- Centre cutting
- Helix angle 30°



Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4FL-D3.0-G		3	6	12	75	4	A	○
GM-4FL-D4.0-G		4	6	15	75	4	A	○
GM-4FL-D5.0-G		5	6	20	75	4	A	●
GM-4FL-D6.0-G		6	6	20	75	4	B	●
GM-4FL-D8.0-G		8	8	25	100	4	B	●
GM-4FL-D10.0-G		10	10	30	100	4	B	●
GM-4FL-D12.0-G		12	12	35	100	4	B	●
GM-4FL-D14.0-G		14	14	40	100	4	B	○
GM-4FL-D16.0-G		16	16	50	150	4	B	○

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

End mill extra long cutting edge **Semi-finishing**

**GM-4EX-G**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4EX-D3.0-G		3	6	20	75	4	A	●
GM-4EX-D4.0-G		4	6	25	75	4	A	●
GM-4EX-D5.0-G		5	6	30	75	4	A	●
GM-4EX-D6.0-G		6	6	30	75	4	B	●
GM-4EX-D8.0-G		8	8	40	100	4	B	●
GM-4EX-D10.0-G		10	10	50	110	4	B	●
GM-4EX-D12.0-G		12	12	50	110	4	B	●
GM-4EX-D16.0-G		16	16	70	150	4	B	●
GM-4EX-D20.0-G		20	20	75	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541

**A**



End mill

Semi-finishing

GM-4E



- Factory standard
- Centre cutting
- Helix angle 45°



Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4E-D1.0S		1	4	3	50	4	A	●
GM-4E-D1.5S		1.5	4	4	50	4	A	●
GM-4E-D2.0S		2	4	6	50	4	A	●
GM-4E-D2.5S		2.5	4	8	50	4	A	●
GM-4E-D3.0S		3	4	8	50	4	A	●
GM-4E-D4.0S		4	4	11	50	4	B	●
GM-4E-D1.0		1	6	3	50	4	A	●
GM-4E-D1.5		1.5	6	4	50	4	A	●
GM-4E-D2.0		2	6	6	50	4	A	●
GM-4E-D2.5		2.5	6	8	50	4	A	●
GM-4E-D3.0		3	6	8	50	4	A	●
GM-4E-D3.5		3.5	6	10	50	4	A	●
GM-4E-D4.0		4	6	11	50	4	A	●
GM-4E-D4.5		4.5	6	11	50	4	A	●
GM-4E-D5.0		5	6	13	50	4	A	●
GM-4E-D5.5		5.5	6	16	50	4	A	●
GM-4E-D6.0		6	6	16	50	4	B	●
GM-4E-D7.0		7	8	20	60	4	A	●
GM-4E-D8.0		8	8	20	60	4	B	●
GM-4E-D9.0		9	10	22	75	4	A	●
GM-4E-D10.0		10	10	25	75	4	B	●
GM-4E-D11.0		11	12	26	75	4	A	●
GM-4E-D12.0		12	12	30	75	4	B	●
GM-4E-D14.0		14	14	32	75	4	B	●
GM-4E-D16.0		16	16	45	100	4	B	●
GM-4E-D18.0		18	18	45	100	4	B	●
GM-4E-D20.0		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492



Nonstandard order > B541

**End mill** **Semi-finishing**

**GM-4E-G**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4E-D1.0S-G		1	4	3	50	4	A	●
GM-4E-D1.5S-G		1.5	4	4	50	4	A	●
GM-4E-D2.0S-G		2	4	6	50	4	A	●
GM-4E-D2.5S-G		2.5	4	8	50	4	A	●
GM-4E-D3.0S-G		3	4	8	50	4	A	●
GM-4E-D4.0S-G		4	4	11	50	4	B	●
GM-4E-D1.0-G		1	6	3	50	4	A	●
GM-4E-D1.5-G		1.5	6	4	50	4	A	●
GM-4E-D2.0-G		2	6	6	50	4	A	●
GM-4E-D2.5-G		2.5	6	8	50	4	A	●
GM-4E-D3.0-G		3	6	8	50	4	A	●
GM-4E-D3.5-G		3.5	6	10	50	4	A	●
GM-4E-D4.0-G		4	6	11	50	4	A	●
GM-4E-D4.5-G		4.5	6	11	50	4	A	○
GM-4E-D5.0-G		5	6	13	50	4	A	●
GM-4E-D5.5-G		5.5	6	16	50	4	A	●
GM-4E-D6.0-G		6	6	16	50	4	B	●
GM-4E-D7.0-G		7	8	20	60	4	A	●
GM-4E-D8.0-G		8	8	20	60	4	B	●
GM-4E-D9.0-G		9	10	22	75	4	A	●
GM-4E-D10.0-G		10	10	25	75	4	B	●
GM-4E-D11.0-G		11	12	26	75	4	A	●
GM-4E-D12.0-G		12	12	30	75	4	B	●
GM-4E-D14.0-G		14	14	32	75	4	B	●
GM-4E-D16.0-G		16	16	45	100	4	B	●
GM-4E-D18.0-G		18	18	45	100	4	B	●
GM-4E-D20.0-G		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## End mill long cutting edge Semi-finishing

**GM-4EL**



- Factory standard
- Centre cutting
- Helix angle 45°

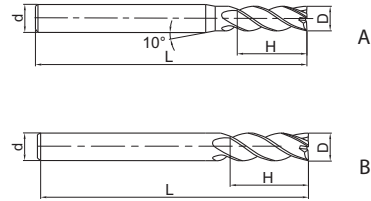

Turning

**B**

Milling

**C**

Drilling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG303
GM-4EL-D3.0		3	6	12	75	4	A	●
GM-4EL-D4.0		4	6	15	75	4	A	●
GM-4EL-D5.0		5	6	20	75	4	A	●
GM-4EL-D6.0		6	6	20	75	4	B	●
GM-4EL-D8.0		8	8	25	100	4	B	●
GM-4EL-D10.0		10	10	30	100	4	B	●
GM-4EL-D12.0		12	12	35	100	4	B	●
GM-4EL-D14.0		14	14	40	100	4	B	●
GM-4EL-D16.0		16	16	50	150	4	B	●
GM-4EL-D20.0		20	20	55	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**D**

Technical Information

**E**

Index

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill short cutting edge **Semi-finishing**

**GM-4EFP**



- Factory standard
- Centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG303
GM-4EFP-D6.0		6	6	5.8	9	30	75	4	○
GM-4EFP-D8.0		8	8	7.8	12	40	100	4	○
GM-4EFP-D10.0		10	10	9.6	15	50	100	4	○
GM-4EFP-D12.0		12	12	11.5	18	50	100	4	○
GM-4EFP-D16.0		16	16	15.5	24	50	150	4	○
GM-4EFP-D20.0		20	20	19.5	30	60	150	4	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541







**A**

## End mill Finishing



### 5501R304GF

- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5501R304GF-0300		3	6	5	50	0	0	4	●	○
5501R304GF-0400		4	6	8	54	0	0	4	●	○
5501R304GF-0500		5	6	9	54	0	0	4	●	○
5501R304GF-0600		6	6	10	54	45	0.1	4	●	○
5501R304GF-0800		8	8	12	58	45	0.1	4	●	○
5501R304GF-1000		10	10	14	66	45	0.1	4	●	○
5501R304GF-1200		12	12	16	73	45	0.1	4	●	○
5501R304GF-1400		14	14	18	75	45	0.15	4	●	○
5501R304GF-1600		16	16	22	82	45	0.15	4	●	○
5501R304GF-1800		18	18	24	84	45	0.15	4	●	○
5501R304GF-2000		20	20	26	92	45	0.15	4	●	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492




Nonstandard order > B541

**End mill** **Finishing**

**5601R304GF**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5601R304GF-0300		3	6	5	50	0	0	4	●
5601R304GF-0400		4	6	8	54	0	0	4	●
5601R304GF-0500		5	6	9	54	0	0	4	●
5601R304GF-0600		6	6	10	54	45	0.1	4	●
5601R304GF-0800		8	8	12	58	45	0.1	4	●
5601R304GF-1000		10	10	14	66	45	0.1	4	●
5601R304GF-1200		12	12	16	73	45	0.1	4	●
5601R304GF-1400		14	14	18	75	45	0.15	4	●
5601R304GF-1600		16	16	22	82	45	0.15	4	●
5601R304GF-1800		18	18	24	84	45	0.15	4	●
5601R304GF-2000		20	20	26	92	45	0.15	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## End mill long cutting edge Finishing

**5502R304GF**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5502R304GF-0300		3	6	8	57	0	0	4	●	○
5502R304GF-0400		4	6	11	57	0	0	4	●	○
5502R304GF-0500		5	6	13	57	0	0	4	●	○
5502R304GF-0600		6	6	13	57	45	0.1	4	●	○
5502R304GF-0800		8	8	19	63	45	0.1	4	●	○
5502R304GF-1000		10	10	22	72	45	0.1	4	●	○
5502R304GF-1200		12	12	26	83	45	0.1	4	●	○
5502R304GF-1400		14	14	26	83	45	0.15	4	●	○
5502R304GF-1600		16	16	32	92	45	0.15	4	●	○
5502R304GF-1800		18	18	32	92	45	0.15	4	●	○
5502R304GF-2000		20	20	38	104	45	0.15	4	●	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541




End mill long cutting edge

Finishing

5602R304GF



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5602R304GF-0300		3	6	8	57	0	0	4	●	○
5602R304GF-0400		4	6	11	57	0	0	4	●	○
5602R304GF-0500		5	6	13	57	0	0	4	●	○
5602R304GF-0600		6	6	13	57	45	0.1	4	●	○
5602R304GF-0800		8	8	19	63	45	0.1	4	●	○
5602R304GF-1000		10	10	22	72	45	0.1	4	●	○
5602R304GF-1200		12	12	26	83	45	0.1	4	●	○
5602R304GF-1400		14	14	26	83	45	0.15	4	●	○
5602R304GF-1600		16	16	32	92	45	0.15	4	●	○
5602R304GF-1800		18	18	32	92	45	0.15	4	●	○
5602R304GF-2000		20	20	38	104	45	0.15	4	●	○

● Ex stock ○ On demand

\* With internal cooling

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## End mill long cutting edge Semi-finishing

### 5508R454GM



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 45°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5508R454GM-0300		3	3	8	45	0	0	4	●	○
5508R454GM-0400		4	4	11	50	0	0	4	●	○
5508R454GM-0500		5	5	13	50	0	0	4	●	○
5508R454GM-0600		6	6	13	57	45	0.1	4	●	○
5508R454GM-0800		8	8	19	63	45	0.1	4	●	○
5508R454GM-1000		10	10	22	72	45	0.1	4	●	○
5508R454GM-1200		12	12	26	83	45	0.1	4	●	○
5508R454GM-1400		14	14	26	83	45	0.15	4	●	○
5508R454GM-1500		15	16	32	92	0	0	4	○	
5508R454GM-1600		16	16	32	92	45	0.15	4	●	○
5508R454GM-1800		18	18	32	92	45	0.15	4	●	○
5508R454GM-2000		20	20	38	104	45	0.15	4	●	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541




End mill long cutting edge

Semi-finishing

5602R454GM



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5602R454GM-0300		3	6	8	57	0	0	4	●
5602R454GM-0400		4	6	11	57	0	0	4	●
5602R454GM-0500		5	6	13	57	0	0	4	●
5602R454GM-0600		6	6	13	57	45	0.1	4	●
5602R454GM-0800		8	8	19	63	45	0.1	4	●
5602R454GM-1000		10	10	22	72	45	0.1	4	●
5602R454GM-1200		12	12	26	83	45	0.1	4	●
5602R454GM-1400		14	14	26	83	45	0.15	4	●
5602R454GM-1600		16	16	32	92	45	0.15	4	●
5602R454GM-1800		18	18	32	92	45	0.15	4	●
5602R454GM-2000		20	20	38	104	45	0.15	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## Torus mill long cutting edge Finishing

**5589R45MGFR**



- Type of shank DIN 6535HA
- Helix angle 45°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		D	R	d (h6)	H	L		KMG405
5589R45MGFR02-0600		6	0.2	6	19	63	6	●
5589R45MGFR02-0800		8	0.2	8	28	72	6	●
5589R45MGFR02-1000		10	0.2	10	34	84	6	●
5589R45MGFR02-1200		12	0.2	12	40	97	6	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**


Index

System code > B278


Cutting data > B492

Nonstandard order > B541

**End mill** **Semi-finishing**



- Factory standard
- Non-centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG303
GM-6E-D6.0		6	6	18	60	6	●
GM-6E-D8.0		8	8	20	60	6	●
GM-6E-D10.0		10	10	30	75	6	●
GM-6E-D12.0		12	12	32	75	6	●
GM-6E-D16.0		16	16	40	100	6	●
GM-6E-D20.0		20	20	45	100	6	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541






A


End mill long cutting edge

Semi-finishing

GM-6EL



- Factory standard
- Non-centre cutting
- Helix angle 45°



Turning

B

Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG303
GM-6EL-D6.0		6	6	24	75	6	●
GM-6EL-D8.0		8	8	32	75	6	●
GM-6EL-D10.0		10	10	40	100	6	●
GM-6EL-D12.0		12	12	45	100	6	●
GM-6EL-D16.0		16	16	64	150	6	●
GM-6EL-D20.0		20	20	75	150	6	●

● Ex stock ○ On demand

\* With internal cooling

Milling

C

Application field						
P	M	K	N	S	H	
✓	✓	✓				✓ Very suitable
						✓ Suitable

Drilling

D

Technical Information

E

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **Finishing**

**5565R302GF**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade
		D	R	d (h6)	d <sub>1</sub>	H	M	L		KMG303
5565R302GF-0300		3	1.5	6	2.8	4	9	57	2	●
5565R302GF-0400		4	2	6	3.7	5	12	57	2	●
5565R302GF-0500		5	2.5	6	4.6	6	15	57	2	●
5565R302GF-0600		6	3	6	5.5	7	20	57	2	●
5565R302GF-0800		8	4	8	7.4	9	26	63	2	●
5565R302GF-1000		10	5	10	9.2	11	31	72	2	●
5565R302GF-1200		12	6	12	11	12	37	83	2	●
5565R302GF-1600		16	8	16	15	16	43	92	2	●
5565R302GF-2000		20	10	20	19	20	50	104	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541




**A**

Ball nose cutter


Semi-finishing

Turning

5665R202GM



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 20°



**B**

Milling

Article	*	Dimensions [mm]						Teeth	Grade
		D	R	d (h6)	d <sub>1</sub>	H	L		KMG303
5665R202GM-0300		3	1.5	6	2.8	4	57	2	●
5665R202GM-0400		4	2	6	3.7	5	57	2	●
5665R202GM-0500		5	2.5	6	4.6	6	57	2	●
5665R202GM-0600		6	3	6	5.5	7	57	2	●
5665R202GM-0800		8	4	8	7.4	9	63	2	●
5665R202GM-1000		10	5	10	9.2	11	72	2	●
5665R202GM-1200		12	6	12	11	12	83	2	●
5665R202GM-1600		16	8	16	15	16	92	2	●
5665R202GM-2000		20	10	20	19	20	104	2	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** Finishing

**5566R302GF**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade KMG303
		D	R	d (h6)	d <sub>1</sub>	H	M	L		
5566R302GF-0300		3	1.5	6	2.8	4	15	75	2	●
5566R302GF-0400		4	2	6	3.7	5	20	75	2	●
5566R302GF-0500		5	2.5	6	4.6	6	25	80	2	●
5566R302GF-0600		6	3	6	5.5	7	60	80	2	●
5566R302GF-0800		8	4	8	7.4	9	65	90	2	●
5566R302GF-1000		10	5	10	9.2	11	40	100	2	●
5566R302GF-1200		12	6	12	11	12	50	120	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




A

## Ball nose cutter Semi-finishing

GM-2B



- Factory standard
- Centre cutting
- Helix angle 35°

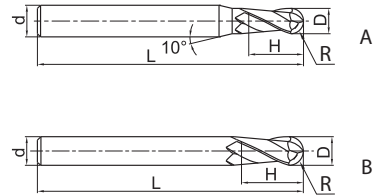

Turning

B

Milling

C

Drilling

D

Technical Information

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG303
GM-2B-R0.5S		0.5	1	4	2	50	2	A	●
GM-2B-R0.75S		0.75	1.5	4	3	50	2	A	●
GM-2B-R1.0S		1	2	4	4	50	2	A	●
GM-2B-R1.25S		1.25	2.5	4	5	50	2	A	●
GM-2B-R1.5S		1.5	3	4	6	50	2	A	●
GM-2B-R2.0S		2	4	4	8	50	2	B	●
GM-2B-R0.5		0.5	1	6	2	50	2	A	○
GM-2B-R0.75		0.75	1.5	6	3	50	2	A	○
GM-2B-R1.0		1	2	6	4	50	2	A	●
GM-2B-R1.25		1.25	2.5	6	5	50	2	A	○
GM-2B-R1.5		1.5	3	6	6	50	2	A	●
GM-2B-R1.75		1.75	3.5	6	8	50	2	A	○
GM-2B-R2.0		2	4	6	8	50	2	A	●
GM-2B-R2.5		2.5	5	6	10	50	2	A	●
GM-2B-R2.75		2.75	5.5	6	12	50	2	A	○
GM-2B-R3.0		3	6	6	12	50	2	B	●
GM-2B-R3.5		3.5	7	8	14	60	2	A	○
GM-2B-R4.0		4	8	8	16	60	2	B	●
GM-2B-R4.5		4.5	9	10	18	75	2	A	○
GM-2B-R5.0		5	10	10	20	75	2	B	●
GM-2B-R6.0		6	12	12	24	75	2	B	●
GM-2B-R7.0		7	14	14	28	75	2	B	●
GM-2B-R8.0		8	16	16	32	100	2	B	●
GM-2B-R10.0		10	20	20	40	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

E

Index

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** Semi-finishing

**GM-2BL**



- Factory standard
- Centre cutting
- Helix angle 35°

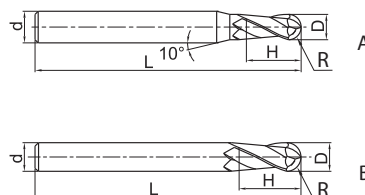

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG303
GM-2BL-R1.0		1	2	6	4	75	2	A	●
GM-2BL-R1.25		1.25	2.5	6	5	75	2	A	●
GM-2BL-R1.5		1.5	3	6	6	75	2	A	●
GM-2BL-R1.75		1.75	3.5	6	8	75	2	A	●
GM-2BL-R2.0		2	4	6	8	75	2	A	●
GM-2BL-R2.5		2.5	5	6	10	75	2	A	●
GM-2BL-R2.75		2.75	5.5	6	12	75	2	A	●
GM-2BL-R3.0		3	6	6	12	75	2	B	●
GM-2BL-R3.5		3.5	7	8	14	75	2	A	●
GM-2BL-R4.0		4	8	8	16	100	2	B	●
GM-2BL-R4.5		4.5	9	10	18	100	2	A	●
GM-2BL-R5.0		5	10	10	20	100	2	B	●
GM-2BL-R6.0		6	12	12	24	100	2	B	●
GM-2BL-R7.0		7	14	14	28	100	2	B	●
GM-2BL-R8.0		8	16	16	32	150	2	B	●
GM-2BL-R10.0		10	20	20	40	150	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter short cutting edge Semi-finishing

**GM-2BFP**



- Factory standard
- Centre cutting
- Helix angle 35°

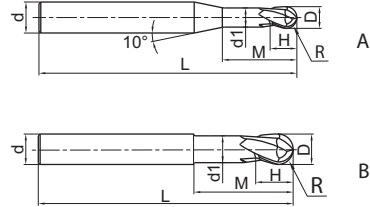

Turning

**B**

Milling

Article	*	Dimensions [mm]								Teeth	Geometry	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L	KMG303			
GM-2BFP-R0.5		0.5	1	6	0.95	1	2.5	75	2	A	○	
GM-2BFP-R0.75		0.75	1.5	6	1.45	1	3	75	2	A	○	
GM-2BFP-R1.0		1	2	6	1.95	2	4	75	2	A	●	
GM-2BFP-R1.5		1.5	3	6	2.85	3	6	75	2	A	○	
GM-2BFP-R2.0		2	4	6	3.85	4	8	75	2	A	○	
GM-2BFP-R2.5		2.5	5	6	4.85	5	10	75	2	A	○	
GM-2BFP-R3.0		3	6	6	5.8	6	12	75	2	B	○	
GM-2BFP-R4.0		4	8	8	7.8	8	16	100	2	B	○	
GM-2BFP-R5.0		5	10	10	9.6	10	20	100	2	B	○	
GM-2BFP-R6.0		6	12	12	11.5	12	24	100	2	B	○	
GM-2BFP-R8.0		8	16	16	15.5	16	32	150	2	B	○	
GM-2BFP-R10.0		10	20	20	19.5	20	40	150	2	B	○	

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **Semi-finishing**

**GM-2BS**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG303
GM-2BS-R0.15		0.15	0.3	4	0.5	50	2	●
GM-2BS-R0.20		0.2	0.4	4	0.6	50	2	●
GM-2BS-R0.25		0.25	0.5	4	0.8	50	2	●
GM-2BS-R0.30		0.3	0.6	4	0.9	50	2	●
GM-2BS-R0.35		0.35	0.7	4	1	50	2	●
GM-2BS-R0.40		0.4	0.8	4	1.2	50	2	●
GM-2BS-R0.45		0.45	0.9	4	1.3	50	2	●
GM-2BS-R0.50		0.5	1	4	1.5	50	2	●
GM-2BS-R0.60		0.6	1.2	4	1.8	50	2	●
GM-2BS-R0.70		0.7	1.4	4	2	50	2	●
GM-2BS-R0.75		0.75	1.5	4	2.3	50	2	●
GM-2BS-R0.80		0.8	1.6	4	2.5	50	2	●
GM-2BS-R0.90		0.9	1.8	4	2.7	50	2	●
GM-2BS-R1.00		1	2	4	3	50	2	●
GM-2BS-R1.25		1.25	2.5	4	3.7	50	2	●
GM-2BS-R1.50		1.5	3	4	4.5	50	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## Ball nose cutter Semi-finishing

### GM-2BP



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade KMG303
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
GM-2BP-R0.25-M04		0.25	0.5	4	0.45	0.7	4	50	2	●
GM-2BP-R0.25-M06		0.25	0.5	4	0.45	0.7	6	50	2	●
GM-2BP-R0.3-M04		0.3	0.6	4	0.55	0.9	4	50	2	●
GM-2BP-R0.3-M06		0.3	0.6	4	0.55	0.9	6	50	2	●
GM-2BP-R0.3-M08		0.3	0.6	4	0.55	0.9	8	50	2	●
GM-2BP-R0.4-M04		0.4	0.8	4	0.75	1.2	4	50	2	●
GM-2BP-R0.4-M06		0.4	0.8	4	0.75	1.2	6	50	2	●
GM-2BP-R0.4-M08		0.4	0.8	4	0.75	1.2	8	50	2	●
GM-2BP-R0.4-M10		0.4	0.8	4	0.75	1.2	10	50	2	●
GM-2BP-R0.5-M04		0.5	1	4	0.95	1.5	4	50	2	●
GM-2BP-R0.5-M06		0.5	1	4	0.95	1.5	6	50	2	●
GM-2BP-R0.5-M08		0.5	1	4	0.95	1.5	8	50	2	●
GM-2BP-R0.5-M10		0.5	1	4	0.95	1.5	10	50	2	●
GM-2BP-R0.5-M12		0.5	1	4	0.95	1.5	12	50	2	●
GM-2BP-R0.6-M06		0.6	1.2	4	1.15	1.8	6	50	2	●
GM-2BP-R0.6-M08		0.6	1.2	4	1.15	1.8	8	50	2	●
GM-2BP-R0.6-M12		0.6	1.2	4	1.15	1.8	12	50	2	●
GM-2BP-R0.6-M16		0.6	1.2	4	1.15	1.8	16	50	2	●
GM-2BP-R0.75-M08		0.75	1.5	4	1.45	2.3	8	50	2	●
GM-2BP-R0.75-M12		0.75	1.5	4	1.45	2.3	12	50	2	●
GM-2BP-R0.75-M16		0.75	1.5	4	1.45	2.3	16	50	2	●
GM-2BP-R1.0-M06		1	2	4	1.95	3	6	50	2	●
GM-2BP-R1.0-M08		1	2	4	1.95	3	8	50	2	●
GM-2BP-R1.0-M10		1	2	4	1.95	3	10	50	2	●
GM-2BP-R1.0-M12		1	2	4	1.95	3	12	50	2	●
GM-2BP-R1.0-M16		1	2	4	1.95	3	16	50	2	●
GM-2BP-R1.0-M20		1	2	4	1.95	3	20	50	2	●
GM-2BP-R1.25-M08		1.25	2.5	4	2.4	3.7	8	50	2	●
GM-2BP-R1.25-M12		1.25	2.5	4	2.4	3.7	12	50	2	●
GM-2BP-R1.25-M16		1.25	2.5	4	2.4	3.7	16	60	2	●
GM-2BP-R1.25-M20		1.25	2.5	4	2.4	3.7	20	60	2	●
GM-2BP-R1.5-M08		1.5	3	6	2.85	4.5	8	50	2	●
GM-2BP-R1.5-M10		1.5	3	6	2.85	4.5	10	50	2	●
GM-2BP-R1.5-M12		1.5	3	6	2.85	4.5	12	50	2	●
GM-2BP-R1.5-M16		1.5	3	6	2.85	4.5	16	60	2	●
GM-2BP-R1.5-M20		1.5	3	6	2.85	4.5	20	60	2	●
GM-2BP-R2.0-M10		2	4	6	3.85	6	10	60	2	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **Semi-finishing**

**GM-2BP**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG303
GM-2BP-R2.0-M16		2	4	6	3.85	6	16	60	2	●
GM-2BP-R2.0-M20		2	4	6	3.85	6	20	60	2	●
GM-2BP-R2.0-M25		2	4	6	3.85	6	25	60	2	●
GM-2BP-R2.5-M16		2.5	5	6	4.85	7.5	16	60	2	●
GM-2BP-R2.5-M25		2.5	5	6	4.85	7.5	25	70	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

**Ball nose cutter** Semi-finishing

**GM-4B**



- Factory standard
- Centre cutting
- Helix angle 35°

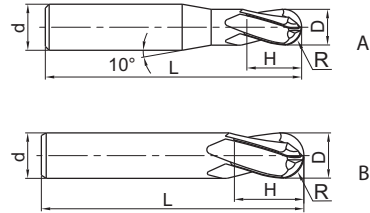

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG303
GM-4B-R1.5		1.5	3	6	6	50	4	A	●
GM-4B-R2.0		2	4	6	8	50	4	A	●
GM-4B-R2.5		2.5	5	6	10	50	4	A	●
GM-4B-R3.0		3	6	6	12	50	4	B	●
GM-4B-R4.0		4	8	8	16	60	4	B	●
GM-4B-R5.0		5	10	10	20	75	4	B	●
GM-4B-R6.0		6	12	12	24	75	4	B	●
GM-4B-R7.0		7	14	14	28	75	4	B	●
GM-4B-R8.0		8	16	16	32	100	4	B	●
GM-4B-R9.0		9	18	18	36	100	4	B	●
GM-4B-R10.0		10	20	20	40	100	4	B	●

- Ex stock   ○ On demand
- \* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

**Application field**

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** Semi-finishing

**GM-4BL**



- Factory standard
- Centre cutting
- Helix angle 35°

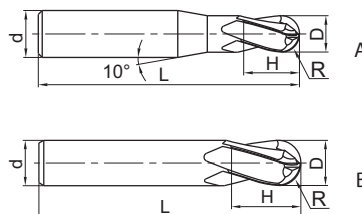

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG303
GM-4BL-R1.5		1.5	3	6	6	75	4	A	○
GM-4BL-R2.0		2	4	6	8	75	4	A	○
GM-4BL-R2.5		2.5	5	6	10	75	4	A	○
GM-4BL-R3.0		3	6	6	12	75	4	B	○
GM-4BL-R4.0		4	8	8	16	100	4	B	○
GM-4BL-R5.0		5	10	10	20	100	4	B	○
GM-4BL-R6.0		6	12	12	24	100	4	B	○
GM-4BL-R7.0		7	14	14	28	100	4	B	○
GM-4BL-R8.0		8	16	16	32	150	4	B	○
GM-4BL-R10.0		10	20	20	40	150	4	B	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541

A


Torus mill

Semi-finishing

GM-2R



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

B

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG303
GM-2R-D1.0R0.2	*	0.2	1	4	3	50	2	○
GM-2R-D1.5R0.2	*	0.2	1.5	4	4	50	2	○
GM-2R-D2.0R0.2	*	0.2	2	4	6	50	2	○
GM-2R-D2.0R0.5	*	0.5	2	4	6	50	2	○
GM-2R-D2.5R0.2	*	0.2	2.5	4	8	50	2	○
GM-2R-D2.5R0.5	*	0.5	2.5	4	8	50	2	○
GM-2R-D3.0R0.2	*	0.2	3	4	8	50	2	○
GM-2R-D3.0R0.3	*	0.3	3	4	8	50	2	○
GM-2R-D3.0R0.5	*	0.5	3	4	8	50	2	○
GM-2R-D4.0R0.2	*	0.2	4	4	11	50	2	○
GM-2R-D4.0R0.3	*	0.3	4	4	11	50	2	○
GM-2R-D4.0R0.5	*	0.5	4	4	11	50	2	○
GM-2R-D4.0R1.0	*	1	4	4	11	50	2	○
GM-2R-D5.0R0.3	*	0.3	5	6	13	50	2	○
GM-2R-D5.0R0.5	*	0.5	5	6	13	50	2	○
GM-2R-D5.0R1.0	*	1	5	6	13	50	2	○
GM-2R-D6.0R0.3	*	0.3	6	6	16	50	2	○
GM-2R-D6.0R0.5	*	0.5	6	6	16	50	2	○
GM-2R-D6.0R1.0	*	1	6	6	16	50	2	○
GM-2R-D8.0R0.3	*	0.3	8	8	20	60	2	○
GM-2R-D8.0R0.5	*	0.5	8	8	20	60	2	○
GM-2R-D8.0R1.0	*	1	8	8	20	60	2	○
GM-2R-D10.0R0.5	*	0.5	10	10	25	75	2	○
GM-2R-D10.0R1.0	*	1	10	10	25	75	2	○
GM-2R-D10.0R1.5	*	1.5	10	10	25	75	2	●
GM-2R-D10.0R2.0	*	2	10	10	25	75	2	○
GM-2R-D12.0R0.5	*	0.5	12	12	30	75	2	○
GM-2R-D12.0R1.0	*	1	12	12	30	75	2	○
GM-2R-D12.0R1.5	*	1.5	12	12	30	75	2	○
GM-2R-D12.0R2.0	*	2	12	12	30	75	2	●

Milling

C

Drilling

D

Technical Information

- Ex stock ○ On demand
- \* With internal cooling

E

Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**Torus mill**

**Semi-finishing**

**GM-4R**



- Factory standard
- Centre cutting
- Helix angle 35°

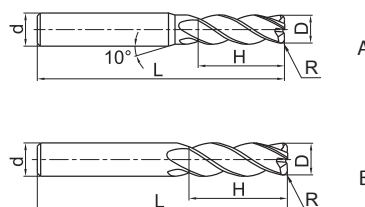

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG303
GM-4R-D3.0R0.2		0.2	3	4	8	50	4	A	●
GM-4R-D4.0R0.3		0.3	4	4	10	50	4	B	○
GM-4R-D4.0R0.5		0.5	4	4	10	50	4	B	●
GM-4R-D5.0R0.5		0.5	5	6	13	50	4	A	●
GM-4R-D5.0R1.0		1	5	6	13	50	4	A	●
GM-4R-D6.0R0.5		0.5	6	6	16	50	4	B	●
GM-4R-D6.0R1.0		1	6	6	16	50	4	B	●
GM-4R-D8.0R0.5		0.5	8	8	20	60	4	B	●
GM-4R-D8.0R1.0		1	8	8	20	60	4	B	●
GM-4R-D10.0R0.5		0.5	10	10	25	75	4	B	●
GM-4R-D10.0R1.0		1	10	10	25	75	4	B	●
GM-4R-D10.0R2.0		2	10	10	25	75	4	B	●
GM-4R-D10.0R3.0		3	10	10	25	75	4	B	●
GM-4R-D12.0R0.5		0.5	12	12	30	75	4	B	●
GM-4R-D12.0R1.0		1	12	12	30	75	4	B	●
GM-4R-D12.0R2.0		2	12	12	30	75	4	B	●
GM-4R-D12.0R3.0		3	12	12	30	75	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Torus mill long shank Semi-finishing

**GM-4RL**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG303
GM-4RL-D6.0R0.5	*	0.5	6	6	16	75	4	●
GM-4RL-D6.0R1.0		1	6	6	16	75	4	●
GM-4RL-D8.0R0.5		0.5	8	8	20	100	4	●
GM-4RL-D8.0R1.0		1	8	8	20	100	4	●
GM-4RL-D10.0R0.5		0.5	10	10	25	100	4	●
GM-4RL-D10.0R1.0		1	10	10	25	100	4	●
GM-4RL-D10.0R2.0		2	10	10	25	100	4	●
GM-4RL-D12.0R0.5		0.5	12	12	30	100	4	○
GM-4RL-D12.0R1.0		1	12	12	30	100	4	●
GM-4RL-D12.0R2.0		2	12	12	30	100	4	●
GM-4RL-D16.0R1.0		1	16	16	45	150	4	●
GM-4RL-D16.0R2.0		2	16	16	45	150	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Application field						
P	M	K	N	S	H	
✓	✓	✓				✓ Very suitable
						✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541



End mill long cutting edge

General roughing

**5602R303GR**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5602R303GR-0600		6	6	13	57	45	0.25	3	●
5602R303GR-0800		8	8	19	63	45	0.25	3	●

● Ex stock ○ On demand

\* With internal cooling

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

**End mill long cutting edge**    **General roughing**

**5602R304GR**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		KMG303
5602R304GR-1000		10	10	22	72	45	0.5	4	●
5602R304GR-1200		12	12	26	83	45	0.5	4	●
5602R304GR-1400		14	14	30	90	45	0.5	4	○
5602R304GR-1600		16	16	32	92	45	0.5	4	●
5602R304GR-2000		20	20	38	104	45	0.5	4	●

● Ex stock    ○ On demand

\* With internal cooling

Milling

**C**

**Application field**

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541




End mill long cutting edge

General roughing

**5602R305GR**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]					Teeth	Grade	
		D	d (h6)	H	L	KCH		CHW	KMG303
5602R305GR-2500		25	25	45	121	45	0.5	5	o

● Ex stock ○ On demand

\* With internal cooling

Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## End mill serrated teeth Semi-finishing

**GM-4W**



- Factory standard
- Centre cutting
- Helix angle 30°

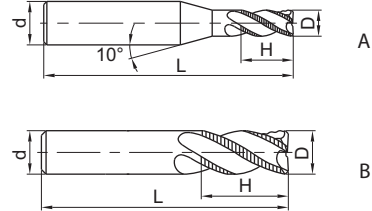

Turning

**B**

Milling

**C**

Drilling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
GM-4W-D6.0		6	6	16	50	4	B	●
GM-4W-D7.0		7	8	20	60	4	A	●
GM-4W-D8.0		8	8	20	60	4	B	●
GM-4W-D9.0		9	10	22	75	4	A	●
GM-4W-D10.0		10	10	25	75	4	B	●
GM-4W-D11.0		11	12	26	75	4	A	●
GM-4W-D12.0		12	12	30	75	4	B	●
GM-4W-D16.0		16	16	45	100	4	B	●
GM-4W-D20.0		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**D**

Technical Information

**E**

Index

Application field						
P	M	K	N	S	H	
✓	✓	✓				✓ Very suitable ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **High-performance machining**

**PM-2E**



- Factory standard
- Centre cutting
- Helix angle 30°

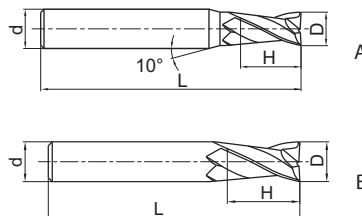

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-2E-D1.0S		1	4	3	50	2	A	●
PM-2E-D1.5S		1.5	4	4	50	2	A	●
PM-2E-D2.0S		2	4	6	50	2	A	●
PM-2E-D2.5S		2.5	4	8	50	2	A	●
PM-2E-D3.0S		3	4	8	50	2	A	●
PM-2E-D4.0S		4	4	11	50	2	B	●
PM-2E-D1.0		1	6	3	50	2	A	●
PM-2E-D1.5		1.5	6	4	50	2	A	●
PM-2E-D2.0		2	6	6	50	2	A	●
PM-2E-D2.5		2.5	6	8	50	2	A	●
PM-2E-D3.0		3	6	8	50	2	A	●
PM-2E-D3.5		3.5	6	10	50	2	A	●
PM-2E-D4.0		4	6	11	50	2	A	●
PM-2E-D4.5		4.5	6	11	50	2	A	●
PM-2E-D5.0		5	6	13	50	2	A	●
PM-2E-D5.5		5.5	6	16	50	2	A	●
PM-2E-D6.0		6	6	16	50	2	B	●
PM-2E-D7.0		7	8	20	60	2	A	●
PM-2E-D8.0		8	8	20	60	2	B	●
PM-2E-D9.0		9	10	22	75	2	A	●
PM-2E-D10.0		10	10	25	75	2	B	●
PM-2E-D11.0		11	12	26	75	2	A	○
PM-2E-D12.0		12	12	30	75	2	B	●
PM-2E-D14.0		14	14	32	75	2	B	●
PM-2E-D16.0		16	16	45	100	2	B	●
PM-2E-D18.0		18	18	45	100	2	B	○
PM-2E-D20.0		20	20	45	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information


**E**

Index



**A**

## End mill long cutting edge High-performance machining

**PM-2EL**



- Factory standard
- Centre cutting
- Helix angle 30°

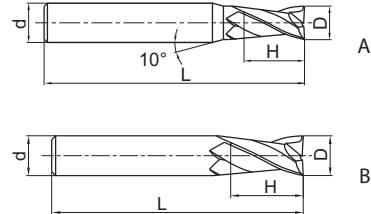

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-2EL-D3.0		3	6	12	75	2	A	●
PM-2EL-D4.0		4	6	15	75	2	A	●
PM-2EL-D5.0		5	6	20	75	2	A	●
PM-2EL-D6.0		6	6	20	75	2	B	●
PM-2EL-D8.0		8	8	25	100	2	B	●
PM-2EL-D10.0		10	10	30	100	2	B	●
PM-2EL-D12.0		12	12	35	100	2	B	●
PM-2EL-D14.0		14	14	40	100	2	B	○
PM-2EL-D16.0		16	16	50	150	2	B	●
PM-2EL-D20.0		20	20	55	150	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **High-performance machining**

**PM-4E-G**



- Factory standard
- Centre cutting
- Helix angle 30°

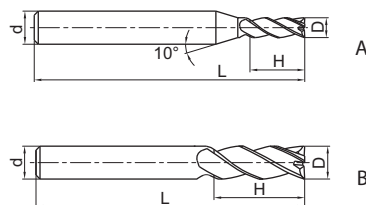

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-4E-D1.0S-G		1	4	3	50	4	A	●
PM-4E-D1.5S-G		1.5	4	4	50	4	A	●
PM-4E-D2.0S-G		2	4	6	50	4	A	●
PM-4E-D2.5S-G		2.5	4	8	50	4	A	●
PM-4E-D3.0S-G		3	4	8	50	4	A	●
PM-4E-D4.0S-G		4	4	11	50	4	B	●
PM-4E-D1.0-G		1	6	3	50	4	A	●
PM-4E-D1.5-G		1.5	6	4	50	4	A	●
PM-4E-D2.0-G		2	6	6	50	4	A	●
PM-4E-D2.5-G		2.5	6	8	50	4	A	●
PM-4E-D3.0-G		3	6	8	50	4	A	●
PM-4E-D3.5-G		3.5	6	10	50	4	A	●
PM-4E-D4.0-G		4	6	11	50	4	A	●
PM-4E-D4.5-G		4.5	6	11	50	4	A	●
PM-4E-D5.0-G		5	6	13	50	4	A	●
PM-4E-D5.5-G		5.5	6	16	50	4	A	●
PM-4E-D6.0-G		6	6	16	50	4	B	●
PM-4E-D7.0-G		7	8	20	60	4	A	●
PM-4E-D8.0-G		8	8	20	60	4	B	●
PM-4E-D9.0-G		9	10	22	75	4	A	●
PM-4E-D10.0-G		10	10	25	75	4	B	●
PM-4E-D11.0-G		11	12	26	75	4	A	●
PM-4E-D12.0-G		12	12	30	75	4	B	●
PM-4E-D14.0-G		14	14	32	75	4	B	●
PM-4E-D16.0-G		16	16	45	100	4	B	●
PM-4E-D18.0-G		18	18	45	100	4	B	●
PM-4E-D20.0-G		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## End mill long cutting edge High-performance machining

**PM-4EL-G**



- Factory standard
- Centre cutting
- Helix angle 30°



Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-4EL-D3.0-G		3	6	12	75	4	A	○
PM-4EL-D4.0-G		4	6	15	75	4	A	○
PM-4EL-D5.0-G		5	6	20	75	4	A	○
PM-4EL-D6.0-G		6	6	20	75	4	B	○
PM-4EL-D8.0-G		8	8	25	100	4	B	○
PM-4EL-D10.0-G		10	10	30	100	4	B	○
PM-4EL-D12.0-G		12	12	35	100	4	B	○
PM-4EL-D14.0-G		14	14	40	100	4	B	○
PM-4EL-D16.0-G		16	16	50	150	4	B	○
PM-4EL-D20.0-G		20	20	55	150	4	B	○

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541



**End mill extra long cutting edge**

**High-performance machining**

**PM-4EX-G**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-4EX-D3.0-G		3	6	20	75	4	A	●
PM-4EX-D4.0-G		4	6	25	75	4	A	●
PM-4EX-D5.0-G		5	6	30	75	4	A	●
PM-4EX-D6.0-G		6	6	30	75	4	B	●
PM-4EX-D8.0-G		8	8	40	100	4	B	●
PM-4EX-D10.0-G		10	10	50	110	4	B	●
PM-4EX-D12.0-G		12	12	50	110	4	B	●
PM-4EX-D16.0-G		16	16	70	150	4	B	●
PM-4EX-D20.0-G		20	20	75	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## End mill High-performance machining

### PM-4E



- Factory standard
- Centre cutting
- Helix angle 45°

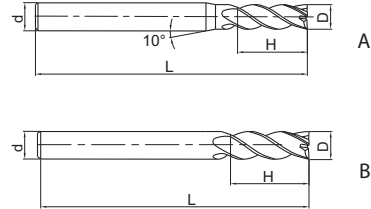

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-4E-D1.0S		1	4	3	50	4	A	●
PM-4E-D1.5S		1.5	4	4	50	4	A	●
PM-4E-D2.0S		2	4	6	50	4	A	●
PM-4E-D2.5S		2.5	4	8	50	4	A	●
PM-4E-D3.0S		3	4	8	50	4	A	●
PM-4E-D4.0S		4	4	11	50	4	B	●
PM-4E-D1.0		1	6	3	50	4	A	●
PM-4E-D1.5		1.5	6	4	50	4	A	●
PM-4E-D2.0		2	6	6	50	4	A	●
PM-4E-D2.5		2.5	6	8	50	4	A	●
PM-4E-D3.0		3	6	8	50	4	A	●
PM-4E-D3.5		3.5	6	10	50	4	A	●
PM-4E-D4.0		4	6	11	50	4	A	●
PM-4E-D4.5		4.5	6	11	50	4	A	●
PM-4E-D5.0		5	6	13	50	4	A	●
PM-4E-D5.5		5.5	6	16	50	4	A	●
PM-4E-D6.0		6	6	16	50	4	B	●
PM-4E-D7.0		7	8	20	60	4	A	●
PM-4E-D8.0		8	8	20	60	4	B	●
PM-4E-D9.0		9	10	22	75	4	A	●
PM-4E-D10.0		10	10	25	75	4	B	●
PM-4E-D11.0		11	12	26	75	4	A	●
PM-4E-D12.0		12	12	30	75	4	B	●
PM-4E-D14.0		14	14	32	75	4	B	●
PM-4E-D16.0		16	16	45	100	4	B	●
PM-4E-D18.0		18	18	45	100	4	B	●
PM-4E-D20.0		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable  
 ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill long cutting edge** **High-performance machining**

**PM-4EL**



- Factory standard
- Centre cutting
- Helix angle 45°

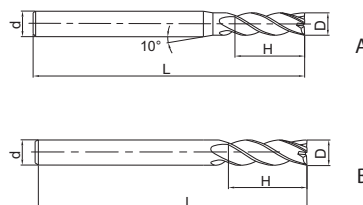

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-4EL-D3.0		3	6	12	75	4	A	●
PM-4EL-D4.0		4	6	15	75	4	A	●
PM-4EL-D5.0		5	6	20	75	4	A	●
PM-4EL-D6.0		6	6	20	75	4	B	●
PM-4EL-D8.0		8	8	25	100	4	B	●
PM-4EL-D10.0		10	10	30	100	4	B	●
PM-4EL-D12.0		12	12	35	100	4	B	●
PM-4EL-D14.0		14	14	40	100	4	B	●
PM-4EL-D16.0		16	16	50	150	4	B	●
PM-4EL-D20.0		20	20	55	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## End mill High-performance machining

**PM-6E**



- Factory standard
- Non-centre cutting
- Helix angle 45°



Turning

**B**

Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG405
PM-6E-D6.0		6	6	18	60	6	●
PM-6E-D8.0		8	8	20	60	6	●
PM-6E-D10.0		10	10	30	75	6	●
PM-6E-D12.0		12	12	32	75	6	●
PM-6E-D16.0		16	16	40	100	6	●
PM-6E-D20.0		20	20	45	100	6	●

- Ex stock   ○ On demand
- \* With internal cooling

Milling

**C**

Application field						
P	M	K	N	S	H	
✓	✓	✓			✓	✓ Very suitable
						✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


End mill long cutting edge

High-performance machining

PM-6EL



- Factory standard
- Non-centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG405
PM-6EL-D6.0		6	6	24	75	6	●
PM-6EL-D8.0		8	8	32	75	6	●
PM-6EL-D10.0		10	10	40	100	6	●
PM-6EL-D12.0		12	12	45	100	6	●
PM-6EL-D16.0		16	16	64	150	6	●
PM-6EL-D20.0		20	20	75	150	6	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




A

## Ball nose cutter High-performance machining

### PM-2B



- Factory standard
- Centre cutting
- Helix angle 30°

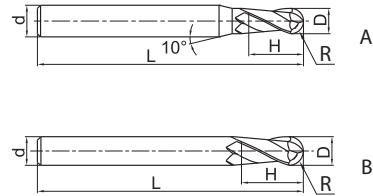

Turning

B

Milling

C

Drilling

D

Technical Information

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG405
PM-2B-R0.5S		0.5	1	4	2	50	2	A	●
PM-2B-R0.75S		0.75	1.5	4	3	50	2	A	●
PM-2B-R1.0S		1	2	4	4	50	2	A	●
PM-2B-R1.25S		1.25	2.5	4	5	50	2	A	●
PM-2B-R1.5S		1.5	3	4	6	50	2	A	●
PM-2B-R2.0S		2	4	4	8	50	2	B	●
PM-2B-R0.5		0.5	1	6	2	50	2	A	●
PM-2B-R0.75		0.75	1.5	6	3	50	2	A	●
PM-2B-R1.0		1	2	6	4	50	2	A	●
PM-2B-R1.25		1.25	2.5	6	5	50	2	A	●
PM-2B-R1.5		1.5	3	6	6	50	2	A	●
PM-2B-R1.75		1.75	3.5	6	8	50	2	A	●
PM-2B-R2.0		2	4	6	8	50	2	A	●
PM-2B-R2.5		2.5	5	6	10	50	2	A	●
PM-2B-R2.75		2.75	5.5	6	12	50	2	A	●
PM-2B-R3.0		3	6	6	12	50	2	B	●
PM-2B-R3.5		3.5	7	8	14	60	2	A	●
PM-2B-R4.0		4	8	8	16	60	2	B	●
PM-2B-R4.5		4.5	9	10	18	75	2	A	●
PM-2B-R5.0		5	10	10	20	75	2	B	●
PM-2B-R6.0		6	12	12	24	75	2	B	●
PM-2B-R7.0		7	14	14	28	75	2	B	●
PM-2B-R8.0		8	16	16	32	100	2	B	●
PM-2B-R10.0		10	20	20	40	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

E

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** High-performance machining

**PM-2BL**



- Factory standard
- Centre cutting
- Helix angle 30°

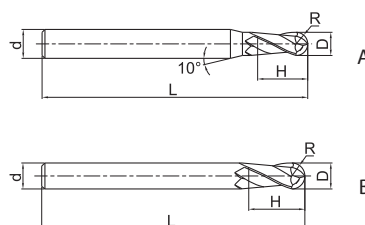

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG405
PM-2BL-R1.0		1	2	6	4	75	2	A	●
PM-2BL-R1.25		1.25	2.5	6	5	75	2	A	●
PM-2BL-R1.5		1.5	3	6	6	75	2	A	●
PM-2BL-R1.75		1.75	3.5	6	8	75	2	A	●
PM-2BL-R2.0		2	4	6	8	75	2	A	●
PM-2BL-R2.5		2.5	5	6	10	75	2	A	●
PM-2BL-R2.75		2.75	5.5	6	12	75	2	A	●
PM-2BL-R3.0		3	6	6	12	75	2	B	●
PM-2BL-R3.5		3.5	7	8	14	75	2	A	●
PM-2BL-R4.0		4	8	8	16	100	2	B	●
PM-2BL-R4.5		4.5	9	10	18	100	2	A	●
PM-2BL-R5.0		5	10	10	20	100	2	B	●
PM-2BL-R6.0		6	12	12	24	100	2	B	●
PM-2BL-R7.0		7	14	14	28	100	2	B	●
PM-2BL-R8.0		8	16	16	32	150	2	B	●
PM-2BL-R10.0		10	20	20	40	150	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter short cutting edge High-performance machining

**PM-2BFP**



- Factory standard
- Centre cutting
- Helix angle 30°

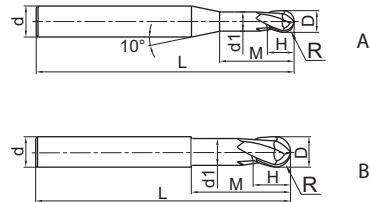

Turning

**B**

Milling

Article	*	Dimensions [mm]								Teeth	Geometry	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L	KMG405			
PM-2BFP-R0.5		0.5	1	6	0.95	1	2.5	75	2	A	●	
PM-2BFP-R0.75		0.75	1.5	6	1.45	1.5	3	75	2	A	●	
PM-2BFP-R1.0		1	2	6	1.95	2	4	75	2	A	●	
PM-2BFP-R1.5		1.5	3	6	2.85	3	6	75	2	A	●	
PM-2BFP-R2.0		2	4	6	3.85	4	8	75	2	A	●	
PM-2BFP-R2.5		2.5	5	6	4.85	5	10	75	2	A	●	
PM-2BFP-R3.0		3	6	6	5.8	6	12	75	2	B	●	
PM-2BFP-R4.0		4	8	8	7.8	8	16	100	2	B	●	
PM-2BFP-R5.0		5	10	10	9.6	10	20	100	2	B	●	
PM-2BFP-R6.0		6	12	12	11.5	12	24	100	2	B	●	
PM-2BFP-R8.0		8	16	16	15.5	16	32	150	2	B	●	
PM-2BFP-R10.0		10	20	20	19.5	20	40	150	2	B	●	

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**Ball nose cutter conical neck**

**High-performance machining**

**PM-2BC**



- Straight shank
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]										Teeth	Grade KMG405
		R	D	d (h6)	d <sub>1</sub>	M	H	L	α	l <sub>1</sub>			
PM-2BC05-R0.25-M03		0.25	0.5	4	0.49	3	0.5	50	0.5	1.5	2	○	
PM-2BC05-R0.25-M05		0.25	0.5	4	0.53	5	0.5	50	0.5	1.5	2	○	
PM-2BC10-R0.25-M03		0.25	0.5	4	0.52	3	0.5	50	1	1.5	2	○	
PM-2BC10-R0.25-M05		0.25	0.5	4	0.59	5	0.5	50	1	1.5	2	○	
PM-2BC15-R0.25-M03		0.25	0.5	4	0.54	3	0.5	50	1.5	1.5	2	○	
PM-2BC15-R0.25-M05		0.25	0.5	4	0.65	5	0.5	50	1.5	1.5	2	○	
PM-2BC05-R0.30-M05		0.3	0.6	4	0.62	5	0.6	50	0.5	1.6	2	○	
PM-2BC05-R0.30-M08		0.3	0.6	4	0.68	8	0.6	50	0.5	1.6	2	○	
PM-2BC10-R0.30-M05		0.3	0.6	4	0.68	5	0.6	50	1	1.6	2	○	
PM-2BC10-R0.30-M08		0.3	0.6	4	0.79	8	0.6	50	1	1.6	2	○	
PM-2BC10-R0.30-M10		0.3	0.6	4	0.86	10	0.6	50	1	1.6	2	○	
PM-2BC10-R0.30-M12		0.3	0.6	4	0.93	12	0.6	50	1	1.6	2	○	
PM-2BC10-R0.30-M15		0.3	0.6	4	1.03	15	0.6	50	1	1.6	2	○	
PM-2BC15-R0.30-M05		0.3	0.6	4	0.74	5	0.6	50	1.5	1.6	2	○	
PM-2BC15-R0.30-M08		0.3	0.6	4	0.9	8	0.6	50	1.5	1.6	2	○	
PM-2BC05-R0.40-M08		0.4	0.8	4	0.87	8	0.8	50	0.5	1.8	2	○	
PM-2BC10-R0.40-M08		0.4	0.8	4	0.98	8	0.8	50	1	1.8	2	○	
PM-2BC15-R0.40-M08		0.4	0.8	4	1.09	8	0.8	50	1.5	1.8	2	○	
PM-2BC05-R0.40-M12		0.4	0.8	4	0.94	12	0.8	60	0.5	1.8	2	○	
PM-2BC10-R0.40-M12		0.4	0.8	4	1.12	12	0.8	60	1	1.8	2	○	
PM-2BC15-R0.40-M12		0.4	0.8	4	1.3	12	0.8	60	1.5	1.8	2	○	
PM-2BC05-R0.50-M10		0.5	1	6	1.08	10	1	60	0.5	2.5	2	○	
PM-2BC05-R0.50-M15		0.5	1	6	1.16	15	1	60	0.5	2.5	2	○	
PM-2BC10-R0.50-M10		0.5	1	6	1.21	10	1	60	1	2.5	2	○	
PM-2BC10-R0.50-M15		0.5	1	6	1.38	15	1	60	1	2.5	2	○	
PM-2BC15-R0.50-M10		0.5	1	6	1.34	10	1	60	1.5	2.5	2	○	
PM-2BC15-R0.50-M15		0.5	1	6	1.6	15	1	60	1.5	2.5	2	○	
PM-2BC20-R0.50-M15		0.5	1	6	1.82	15	1	60	2	2.5	2	○	
PM-2BC05-R0.50-M20		0.5	1	6	1.25	20	1	70	0.5	2.5	2	○	
PM-2BC05-R0.50-M25		0.5	1	6	1.34	25	1	70	0.5	2.5	2	○	
PM-2BC05-R0.50-M30		0.5	1	6	1.42	30	1	70	0.5	2.5	2	○	
PM-2BC10-R0.50-M20		0.5	1	6	1.56	20	1	70	1	2.5	2	○	
PM-2BC10-R0.50-M25		0.5	1	6	1.73	25	1	70	1	2.5	2	○	
PM-2BC10-R0.50-M30		0.5	1	6	1.91	30	1	70	1	2.5	2	○	
PM-2BC15-R0.50-M20		0.5	1	6	1.86	20	1	70	1.5	2.5	2	○	
PM-2BC20-R0.50-M20		0.5	1	6	2.17	20	1	70	2	2.5	2	○	
PM-2BC30-R0.50-M20		0.5	1	6	2.78	20	1	70	3	2.5	2	○	

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541



**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**


Index




**A**

## Ball nose cutter conical neck High-performance machining

### PM-2BC



- Straight shank
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]										Teeth	Grade KMG405
		R	D	d (h6)	d <sub>i</sub>	M	H	L	α	I <sub>1</sub>			
PM-2BC50-R0.50-M20		0.5	1	6	4.01	20	1	70	5	2.5	2	○	
PM-2BC10-R0.50-M35		0.5	1	6	2.08	35	1	80	1	2.5	2	○	
PM-2BC05-R0.60-M12		0.6	1.2	6	1.31	12	1.2	60	0.5	2.7	2	○	
PM-2BC10-R0.60-M12		0.6	1.2	6	1.47	12	1.2	60	1	2.7	2	○	
PM-2BC15-R0.60-M12		0.6	1.2	6	1.63	12	1.2	60	1.5	2.7	2	○	
PM-2BC05-R0.60-M24		0.6	1.2	6	1.52	24	1.2	70	0.5	2.7	2	○	
PM-2BC10-R0.60-M24		0.6	1.2	6	1.89	24	1.2	70	1	2.7	2	○	
PM-2BC15-R0.60-M24		0.6	1.2	6	2.26	24	1.2	70	1.5	2.7	2	○	
PM-2BC05-R0.75-M10		0.75	1.5	6	1.57	10	1.5	60	0.5	3	2	○	
PM-2BC05-R0.75-M15		0.75	1.5	6	1.65	15	1.5	60	0.5	3	2	○	
PM-2BC10-R0.75-M10		0.75	1.5	6	1.69	10	1.5	60	1	3	2	○	
PM-2BC10-R0.75-M15		0.75	1.5	6	1.86	15	1.5	60	1	3	2	○	
PM-2BC15-R0.75-M10		0.75	1.5	6	1.81	10	1.5	60	1.5	3	2	○	
PM-2BC15-R0.75-M15		0.75	1.5	6	2.07	15	1.5	60	1.5	3	2	○	
PM-2BC05-R0.75-M30		0.75	1.5	6	1.92	30	1.5	70	0.5	3	2	○	
PM-2BC10-R0.75-M20		0.75	1.5	6	2.04	20	1.5	70	1	3	2	○	
PM-2BC10-R0.75-M30		0.75	1.5	6	2.39	30	1.5	70	1	3	2	○	
PM-2BC15-R0.75-M30		0.75	1.5	6	2.86	30	1.5	70	1.5	3	2	○	
PM-2BC05-R1.0-M20		1	2	6	2.18	20	2	60	0.5	4	2	○	
PM-2BC10-R1.0-M20		1	2	6	2.46	20	2	60	1	4	2	○	
PM-2BC10-R1.0-M25		1	2	6	2.64	25	2	60	1	4	2	○	
PM-2BC15-R1.0-M20		1	2	6	2.74	20	2	60	1.5	4	2	○	
PM-2BC05-R1.0-M30		1	2	6	2.36	30	2	70	0.5	4	2	○	
PM-2BC10-R1.0-M30		1	2	6	2.81	30	2	70	1	4	2	○	
PM-2BC15-R1.0-M30		1	2	6	3.27	30	2	70	1.5	4	2	○	
PM-2BC20-R1.0-M30		1	2	6	3.72	30	2	70	2	4	2	○	
PM-2BC30-R1.0-M30		1	2	6	4.63	30	2	70	3	4	2	○	
PM-2BC05-R1.0-M40		1	2	6	2.53	40	2	80	0.5	4	2	○	
PM-2BC10-R1.0-M35		1	2	6	2.99	35	2	80	1	4	2	○	
PM-2BC10-R1.0-M40		1	2	6	3.16	40	2	80	1	4	2	○	
PM-2BC15-R1.0-M40		1	2	6	3.79	40	2	80	1.5	4	2	○	
PM-2BC20-R1.0-M40		1	2	6	4.42	40	2	80	2	4	2	○	
PM-2BC30-R1.0-M40		1	2	6	5.68	40	2	80	3	4	2	○	
PM-2BC10-R1.0-M50		1	2	6	3.51	50	2	90	1	4	2	○	
PM-2BC05-R1.5-M30		1.5	3	6	3.32	30	3	70	0.5	6	2	○	
PM-2BC10-R1.5-M30		1.5	3	6	3.74	30	3	70	1	6	2	○	
PM-2BC15-R1.5-M30		1.5	3	6	4.16	30	3	70	1.5	6	2	○	

● Ex stock   ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541


**Ball nose cutter conical neck**

**High-performance machining**

**PM-2BC**



- Straight shank
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]										Grade	
		R	D	d (h6)	d <sub>1</sub>	M	H	L	α	l <sub>1</sub>	Teeth	KMG405	
PM-2BC05-R1.5-M40		1.5	3	6	3.5	40	3	80	0.5	6	2	○	
PM-2BC10-R1.5-M40		1.5	3	6	4.09	40	3	80	1	6	2	○	
PM-2BC15-R1.5-M40		1.5	3	6	4.69	40	3	80	1.5	6	2	○	
PM-2BC05-R1.5-M50		1.5	3	6	3.67	50	3	90	0.5	6	2	○	
PM-2BC10-R1.5-M50		1.5	3	6	4.44	50	3	90	1	6	2	○	
PM-2BC15-R1.5-M50		1.5	3	6	5.21	50	3	90	1.5	6	2	○	
PM-2BC05-R2.0-M60		2	4	6	4.83	60	4	110	0.5	7	2	○	
PM-2BC10-R2.0-M60		2	4	6	5.76	60	4	110	1	7	2	○	

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter High-performance machining

**PM-4B**



- Factory standard
- Centre cutting
- Helix angle 30°

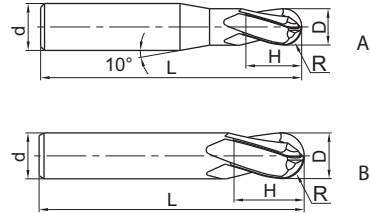

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG405
PM-4B-R1.5		1.5	3	6	6	50	4	A	●
PM-4B-R2.0		2	4	6	8	50	4	A	●
PM-4B-R2.5		2.5	5	6	10	50	4	A	●
PM-4B-R3.0		3	6	6	12	50	4	B	●
PM-4B-R4.0		4	8	8	16	60	4	B	●
PM-4B-R5.0		5	10	10	20	75	4	B	●
PM-4B-R6.0		6	12	12	24	75	4	B	●
PM-4B-R7.0		7	14	14	28	75	4	B	●
PM-4B-R8.0		8	16	16	32	100	4	B	●
PM-4B-R9.0		9	18	18	36	100	4	B	●
PM-4B-R10.0		10	20	20	40	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** **High-performance machining**

**PM-4BL**



- Factory standard
- Centre cutting
- Helix angle 30°

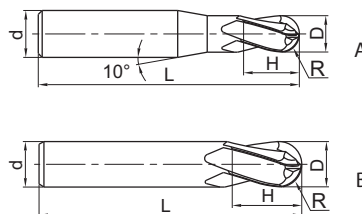

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG405
PM-4BL-R1.5		1.5	3	6	6	75	4	A	●
PM-4BL-R2.0		2	4	6	8	75	4	A	●
PM-4BL-R2.5		2.5	5	6	10	75	4	A	●
PM-4BL-R3.0		3	6	6	12	75	4	B	●
PM-4BL-R4.0		4	8	8	16	100	4	B	●
PM-4BL-R5.0		5	10	10	20	100	4	B	●
PM-4BL-R6.0		6	12	12	24	100	4	B	●
PM-4BL-R7.0		7	14	14	28	100	4	B	●
PM-4BL-R8.0		8	16	16	32	150	4	B	●
PM-4BL-R9.0		9	18	18	36	150	4	B	●
PM-4BL-R10.0		10	20	20	40	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**A**

## Torus mill High-performance machining

**PM-2R**



- Factory standard
- Centre cutting
- Helix angle 30°

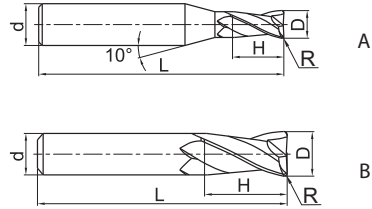

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			
PM-2R-D1.0R0.2		0.2	1	4	3	50	2	A	●
PM-2R-D1.5R0.2		0.2	1.5	4	4	50	2	A	●
PM-2R-D2.0R0.2		0.2	2	4	6	50	2	A	●
PM-2R-D2.0R0.5		0.5	2	4	6	50	2	A	●
PM-2R-D2.5R0.2		0.2	2.5	4	8	50	2	A	●
PM-2R-D2.5R0.5		0.5	2.5	4	8	50	2	A	●
PM-2R-D3.0R0.2		0.2	3	4	8	50	2	A	●
PM-2R-D3.0R0.3		0.3	3	4	8	50	2	A	○
PM-2R-D3.0R0.5		0.5	3	4	8	50	2	A	●
PM-2R-D4.0R0.2		0.2	4	4	11	50	2	B	●
PM-2R-D4.0R0.3		0.3	4	4	11	50	2	B	●
PM-2R-D4.0R0.5		0.5	4	4	11	50	2	B	●
PM-2R-D4.0R1.0		1	4	4	11	50	2	B	●
PM-2R-D5.0R0.3		0.3	5	6	13	50	2	A	○
PM-2R-D5.0R0.5		0.5	5	6	13	50	2	A	●
PM-2R-D5.0R1.0		1	5	6	13	50	2	A	●
PM-2R-D6.0R0.3		0.3	6	6	16	50	2	B	●
PM-2R-D6.0R0.5		0.5	6	6	16	50	2	B	●
PM-2R-D6.0R1.0		1	6	6	16	50	2	B	●
PM-2R-D8.0R0.3		0.3	8	8	20	60	2	B	○
PM-2R-D8.0R0.5		0.5	8	8	20	60	2	B	●
PM-2R-D8.0R1.0		1	8	8	20	60	2	B	●
PM-2R-D10.0R0.5		0.5	10	10	25	75	2	B	●
PM-2R-D10.0R1.0		1	10	10	25	75	2	B	●
PM-2R-D10.0R1.5		1.5	10	10	25	75	2	B	●
PM-2R-D10.0R2.0		2	10	10	25	75	2	B	●
PM-2R-D12.0R0.5		0.5	12	12	30	75	2	B	●
PM-2R-D12.0R1.0		1	12	12	30	75	2	B	●
PM-2R-D12.0R1.5		1.5	12	12	30	75	2	B	●
PM-2R-D12.0R2.0		2	12	12	30	75	2	B	●

- Ex stock ○ On demand
- \* With internal cooling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **High-performance machining**

**PM-4H**



- Factory standard
- Centre cutting
- Helix angle 0°

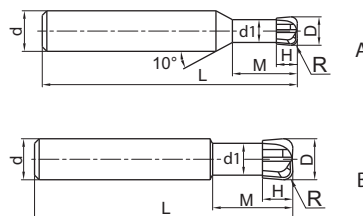

Article	*	Dimensions [mm]							Teeth	Geometry	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L			KMG405
PM-4H-D3.0R0.8		0.8	3	6	2.7	1.2	8	50	4	A	●
PM-4H-D4.0R1.0		1	4	6	3.6	1.6	10	50	4	A	●
PM-4H-D5.0R1.2		1.2	5	6	4.5	2	12.5	50	4	A	●
PM-4H-D6.0R1.0		1	6	6	5.4	2.5	12	50	4	B	●
PM-4H-D6.0R1.5		1.5	6	6	5.4	2.5	12	50	4	B	●
PM-4H-D6.0R2.0		2	6	6	5.4	2.5	12	50	4	B	●
PM-4H-D8.0R1.0		1	8	8	7	3.5	16	60	4	B	●
PM-4H-D8.0R2.0		2	8	8	7	3.5	16	60	4	B	●
PM-4H-D10.0R1.0		1	10	10	9	4	20	75	4	B	●
PM-4H-D10.0R2.0		2	10	10	9	4	20	75	4	B	●
PM-4H-D10.0R3.0		3	10	10	9	4	20	75	4	B	●
PM-4H-D12.0R2.0		2	12	12	11	5	24	75	4	B	●
PM-4H-D12.0R3.0		3	12	12	11	5	24	75	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




A

## End mill long shank High-performance machining

**PM-4HL**



- Factory standard
- Centre cutting
- Helix angle 0°

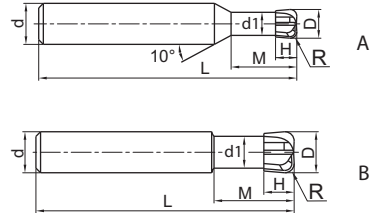

Turning

B

Milling

C

Drilling

Article	*	Dimensions [mm]							Teeth	Geometry	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L			
PM-4HL-D4.0R1.0		1	4	6	3.6	1.6	10	75	4	A	●
PM-4HL-D5.0R1.2		1.2	5	6	4.5	2	12.5	75	4	A	●
PM-4HL-D6.0R1.0		1	6	6	5.4	2.5	12	75	4	B	●
PM-4HL-D6.0R1.5		1.5	6	6	5.4	2.5	12	75	4	B	●
PM-4HL-D6.0R2.0		2	6	6	5.4	2.5	12	75	4	B	●
PM-4HL-D8.0R1.0		1	8	8	7	3.5	16	100	4	B	●
PM-4HL-D8.0R2.0		2	8	8	7	3.5	16	100	4	B	●
PM-4HL-D10.0R1.0		1	10	10	9	4	20	100	4	B	●
PM-4HL-D10.0R2.0		2	10	10	9	4	20	100	4	B	●
PM-4HL-D10.0R3.0		3	10	10	9	4	20	100	4	B	●
PM-4HL-D12.0R2.0		2	12	12	11	5	24	100	4	B	●
PM-4HL-D12.0R3.0		3	12	12	11	5	24	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

D

Technical Information

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

F

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**Torus mill**

**High-performance machining**

**PM-4R**



- Factory standard
- Centre cutting
- Helix angle 30°

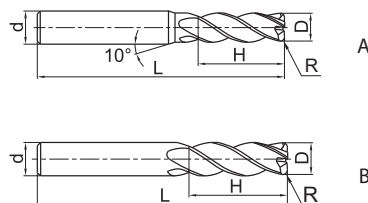

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG405
PM-4R-D3.0R0.2		0.2	3	6	8	50	4	A	●
PM-4R-D4.0R0.3		0.3	4	6	10	50	4	A	●
PM-4R-D4.0R0.5		0.5	4	6	10	50	4	A	●
PM-4R-D5.0R0.5		0.5	5	6	13	50	4	A	●
PM-4R-D5.0R1.0		1	5	6	13	50	4	A	●
PM-4R-D6.0R0.5		0.5	6	6	16	50	4	B	●
PM-4R-D6.0R1.0		1	6	6	16	50	4	B	●
PM-4R-D8.0R0.5		0.5	8	8	20	60	4	B	●
PM-4R-D8.0R1.0		1	8	8	20	60	4	B	●
PM-4R-D10.0R0.5		0.5	10	10	25	75	4	B	●
PM-4R-D10.0R1.0		1	10	10	25	75	4	B	●
PM-4R-D10.0R2.0		2	10	10	25	75	4	B	●
PM-4R-D10.0R3.0		3	10	10	25	75	4	B	●
PM-4R-D12.0R0.5		0.5	12	12	30	75	4	B	●
PM-4R-D12.0R1.0		1	12	12	30	75	4	B	●
PM-4R-D12.0R2.0		2	12	12	30	75	4	B	●
PM-4R-D12.0R3.0		3	12	12	30	75	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## Torus mill long shank High-performance machining

**PM-4RL**



- Factory standard
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG405
PM-4RL-D6.0R0.5	*	0.5	6	6	16	75	4	●
PM-4RL-D6.0R1.0		1	6	6	16	75	4	●
PM-4RL-D8.0R0.5		0.5	8	8	20	100	4	●
PM-4RL-D8.0R1.0		1	8	8	20	100	4	○
PM-4RL-D10.0R0.5		0.5	10	10	25	100	4	○
PM-4RL-D10.0R1.0		1	10	10	25	100	4	●
PM-4RL-D10.0R2.0		2	10	10	25	100	4	●
PM-4RL-D12.0R0.5		0.5	12	12	30	100	4	●
PM-4RL-D12.0R1.0		1	12	12	30	100	4	●
PM-4RL-D12.0R2.0		2	12	12	30	100	4	●
PM-4RL-D16.0R1.0		1	16	16	45	150	4	●
PM-4RL-D16.0R2.0		2	16	16	45	150	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**


Index

System code > B278


Cutting data > B492

Nonstandard order > B541

**End mill** **High-performance machining**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG405
PM-2ES-D0.3		0.3	4	0.6	50	2	●
PM-2ES-D0.4		0.4	4	0.8	50	2	●
PM-2ES-D0.5		0.5	4	1	50	2	●
PM-2ES-D0.6		0.6	4	1.2	50	2	●
PM-2ES-D0.7		0.7	4	1.4	50	2	●
PM-2ES-D0.8		0.8	4	1.6	50	2	●
PM-2ES-D0.9		0.9	4	1.8	50	2	○
PM-2ES-D1.0		1	4	2	50	2	●
PM-2ES-D1.1		1.1	4	2	50	2	○
PM-2ES-D1.2		1.2	4	2.5	50	2	●
PM-2ES-D1.3		1.3	4	2.5	50	2	●
PM-2ES-D1.4		1.4	4	3	50	2	●
PM-2ES-D1.5		1.5	4	3	50	2	●
PM-2ES-D1.6		1.6	4	3.5	50	2	●
PM-2ES-D1.7		1.7	4	3.5	50	2	●
PM-2ES-D1.8		1.8	4	4	50	2	●
PM-2ES-D1.9		1.9	4	4	50	2	○
PM-2ES-D2.0		2	4	4	50	2	●
PM-2ES-D2.1		2.1	4	4	50	2	●
PM-2ES-D2.2		2.2	4	4.5	50	2	●
PM-2ES-D2.3		2.3	4	4.5	50	2	●
PM-2ES-D2.4		2.4	4	5	50	2	●
PM-2ES-D2.5		2.5	4	5	50	2	●
PM-2ES-D2.6		2.6	4	5	50	2	○
PM-2ES-D2.7		2.7	4	5.5	50	2	○
PM-2ES-D2.8		2.8	4	5.5	50	2	○
PM-2ES-D2.9		2.9	4	6	50	2	○
PM-2ES-D3.0		3	4	6	50	2	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable



A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index

A


Turning

## End mill High-performance machining

### PM-2EP



- Factory standard
- Centre cutting
- Helix angle 35°



B

Milling

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>i</sub>	H	M	L		
PM-2EP-D0.5-M06		0.5	4	0.45	0.7	6	50	2	●
PM-2EP-D0.5-M04		0.5	4	0.45	0.6	4	50	2	●
PM-2EP-D0.5-M08		0.5	4	0.45	0.7	8	50	2	○
PM-2EP-D0.8-M04		0.8	4	0.75	1.2	4	50	2	●
PM-2EP-D0.8-M08		0.8	4	0.75	1.2	8	50	2	○
PM-2EP-D0.8-M10		0.8	4	0.75	1.2	10	50	2	○
PM-2EP-D0.8-M06		0.8	4	0.75	1.2	6	50	2	○
PM-2EP-D1.0-M20		1	4	0.95	1.5	20	50	2	●
PM-2EP-D1.0-M14		1	4	0.95	1.5	14	50	2	●
PM-2EP-D1.0-M16		1	4	0.95	1.5	16	50	2	●
PM-2EP-D1.0-M04		1	4	0.95	1.5	4	50	2	●
PM-2EP-D1.0-M06		1	4	0.95	1.5	6	50	2	●
PM-2EP-D1.0-M10		1	4	0.95	1.5	10	50	2	●
PM-2EP-D1.0-M12		1	4	0.95	1.5	12	50	2	●
PM-2EP-D1.0-M08		1	4	0.95	1.5	8	50	2	●
PM-2EP-D1.2-M10		1.2	4	1.15	1.8	10	50	2	○
PM-2EP-D1.2-M06		1.2	4	1.15	1.8	6	50	2	●
PM-2EP-D1.2-M08		1.2	4	1.15	1.8	8	50	2	○
PM-2EP-D1.2-M16		1.2	4	1.15	1.8	16	50	2	○
PM-2EP-D1.2-M12		1.2	4	1.15	1.8	12	50	2	○
PM-2EP-D1.5-M18		1.5	4	1.45	2.3	18	50	2	●
PM-2EP-D1.5-M16		1.5	4	1.45	2.3	16	50	2	●
PM-2EP-D1.5-M10		1.5	4	1.45	2.3	10	50	2	●
PM-2EP-D1.5-M12		1.5	4	1.45	2.3	12	50	2	●
PM-2EP-D1.5-M14		1.5	4	1.45	2.3	14	50	2	●
PM-2EP-D1.5-M20		1.5	4	1.45	2.3	20	50	2	●
PM-2EP-D1.5-M08		1.5	4	1.45	2.3	8	50	2	●
PM-2EP-D1.5-M06		1.5	4	1.45	2.3	6	50	2	●
PM-2EP-D2.0-M20		2	4	1.95	3	20	50	2	●
PM-2EP-D2.0-M12		2	4	1.95	3	12	50	2	●
PM-2EP-D2.0-M10		2	4	1.95	3	10	50	2	●
PM-2EP-D2.0-M18		2	4	1.95	3	18	50	2	●
PM-2EP-D2.0-M16		2	4	1.95	3	16	50	2	●
PM-2EP-D2.0-M08		2	4	1.95	3	8	50	2	●
PM-2EP-D2.0-M14		2	4	1.95	3	14	50	2	●
PM-2EP-D2.0-M06		2	4	1.95	3	6	50	2	●
PM-2EP-D2.5-M08		2.5	4	2.4	3.7	8	50	2	●

● Ex stock ○ On demand

\* With internal cooling

C

Drilling

D

Technical Information

E

Index

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code &gt; B278


Cutting data &gt; B492

Nonstandard order &gt; B541


## End mill

## High-performance machining

## PM-2EP



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
PM-2EP-D2.5-M10		2.5	4	2.4	3.7	10	50	2	○
PM-2EP-D2.5-M16		2.5	4	2.4	3.7	16	60	2	○
PM-2EP-D2.5-M20		2.5	4	2.4	3.7	20	60	2	○
PM-2EP-D2.5-M14		2.5	4	2.4	3.7	14	50	2	○
PM-2EP-D2.5-M12		2.5	4	2.4	3.7	12	50	2	○
PM-2EP-D2.5-M18		2.5	4	2.4	3.7	18	60	2	○
PM-2EP-D3.0-M18		3	6	2.85	4.5	18	60	2	○
PM-2EP-D3.0-M10		3	6	2.85	4.5	10	50	2	●
PM-2EP-D3.0-M20		3	6	2.85	4.5	20	60	2	●
PM-2EP-D3.0-M16		3	6	2.85	4.5	16	60	2	●
PM-2EP-D3.0-M06		3	6	2.85	4.5	6	50	2	○
PM-2EP-D3.0-M14		3	6	2.85	4.5	14	60	2	○
PM-2EP-D3.0-M12		3	6	2.85	4.5	12	50	2	●
PM-2EP-D3.0-M08		3	6	2.85	4.5	8	50	2	○
PM-2EP-D4.0-M20		4	6	3.85	6	20	60	2	●
PM-2EP-D4.0-M14		4	6	3.85	6	14	60	2	○
PM-2EP-D4.0-M16		4	6	3.85	6	16	60	2	○
PM-2EP-D4.0-M25		4	6	3.85	6	25	60	2	●
PM-2EP-D4.0-M12		4	6	3.85	6	12	50	2	●
PM-2EP-D5.0-M25		5	6	4.85	7.5	25	70	2	●
PM-2EP-D5.0-M12		5	6	4.85	7.5	12	60	2	●
PM-2EP-D5.0-M14		5	6	4.85	7.5	14	60	2	●
PM-2EP-D5.0-M20		5	6	4.85	7.5	20	70	2	●
PM-2EP-D5.0-M16		5	6	4.85	7.5	16	60	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code &gt; B278


Cutting data &gt; B492

Nonstandard order &gt; B541


**A**

## Ball nose cutter High-performance machining

**PM-2BS**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG405
PM-2BS-R0.15		0.15	0.3	4	0.5	50	2	●
PM-2BS-R0.20		0.2	0.4	4	0.6	50	2	●
PM-2BS-R0.25		0.25	0.5	4	0.8	50	2	●
PM-2BS-R0.30		0.3	0.6	4	0.9	50	2	●
PM-2BS-R0.35		0.35	0.7	4	1	50	2	○
PM-2BS-R0.40		0.4	0.8	4	1.2	50	2	●
PM-2BS-R0.45		0.45	0.9	4	1.3	50	2	○
PM-2BS-R0.50		0.5	1	4	1.5	50	2	●
PM-2BS-R0.60		0.6	1.2	4	1.8	50	2	●
PM-2BS-R0.70		0.7	1.4	4	2	50	2	○
PM-2BS-R0.75		0.75	1.5	4	2.3	50	2	●
PM-2BS-R0.80		0.8	1.6	4	2.5	50	2	○
PM-2BS-R0.90		0.9	1.8	4	2.7	50	2	○
PM-2BS-R1.00		1	2	4	3	50	2	●
PM-2BS-R1.25		1.25	2.5	4	3.7	50	2	○
PM-2BS-R1.50		1.5	3	4	4.5	50	2	●

Milling

**C**

- Ex stock ○ On demand
- \* With internal cooling

Drilling

**D**

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

## Ball nose cutter High-performance machining

PM-2BP



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]								Teeth	Grade KMG405
		R	D	d (h6)	d <sub>1</sub>	H	M	L			
PM-2BP-R0.25-M04		0.25	0.5	4	0.45	0.7	4	50	2	●	
PM-2BP-R0.25-M06		0.25	0.5	4	0.45	0.7	6	50	2	●	
PM-2BP-R0.3-M06		0.3	0.6	4	0.55	0.9	6	50	2	●	
PM-2BP-R0.3-M08		0.3	0.6	4	0.55	0.9	8	50	2	●	
PM-2BP-R0.3-M04		0.3	0.6	4	0.55	0.9	4	50	2	●	
PM-2BP-R0.4-M04		0.4	0.8	4	0.75	1.2	4	50	2	●	
PM-2BP-R0.4-M10		0.4	0.8	4	0.75	1.2	10	50	2	●	
PM-2BP-R0.4-M06		0.4	0.8	4	0.75	1.2	6	50	2	●	
PM-2BP-R0.4-M08		0.4	0.8	4	0.75	1.2	8	50	2	●	
PM-2BP-R0.5-M06		0.5	1	4	0.95	1.5	6	50	2	●	
PM-2BP-R0.5-M15		0.5	1	4	0.95	1.5	15	50	2	○	
PM-2BP-R0.5-M04		0.5	1	4	0.95	1.5	4	50	2	●	
PM-2BP-R0.5-M08		0.5	1	4	0.95	1.5	8	50	2	●	
PM-2BP-R0.5-M10		0.5	1	4	0.95	1.5	10	50	2	●	
PM-2BP-R0.5-M12		0.5	1	4	0.95	1.5	12	50	2	●	
PM-2BP-R0.6-M16		0.6	1.2	4	1.15	1.8	16	50	2	○	
PM-2BP-R0.6-M06		0.6	1.2	4	1.15	1.8	6	50	2	●	
PM-2BP-R0.6-M12		0.6	1.2	4	1.15	1.8	12	50	2	○	
PM-2BP-R0.6-M08		0.6	1.2	4	1.15	1.8	8	50	2	○	
PM-2BP-R0.75-M08		0.75	1.5	4	1.45	2.3	8	50	2	●	
PM-2BP-R0.75-M06		0.75	1.5	4	1.45	2.3	6	50	2	○	
PM-2BP-R0.75-M12		0.75	1.5	4	1.45	2.3	12	50	2	●	
PM-2BP-R0.75-M16		0.75	1.5	4	1.45	2.3	16	50	2	●	
PM-2BP-R1.0-M16		1	2	4	1.95	3	16	50	2	●	
PM-2BP-R1.0-M06		1	2	4	1.95	3	6	50	2	●	
PM-2BP-R1.0-M20		1	2	4	1.95	3	20	50	2	●	
PM-2BP-R1.0-M10		1	2	4	1.95	3	10	50	2	●	
PM-2BP-R1.0-M12		1	2	4	1.95	3	12	50	2	●	
PM-2BP-R1.0-M08		1	2	4	1.95	3	8	50	2	●	
PM-2BP-R1.25-M08		1.25	2.5	4	2.4	3.7	8	50	2	○	
PM-2BP-R1.25-M10		1.25	2.5	4	2.4	3.7	10	50	2	○	
PM-2BP-R1.25-M16		1.25	2.5	4	2.4	3.7	16	60	2	○	
PM-2BP-R1.25-M12		1.25	2.5	4	2.4	3.7	12	50	2	●	
PM-2BP-R1.25-M20		1.25	2.5	4	2.4	3.7	20	60	2	○	
PM-2BP-R1.5-M10		1.5	3	6	2.85	4.5	10	50	2	●	
PM-2BP-R1.5-M20		1.5	3	6	2.85	4.5	20	60	2	●	
PM-2BP-R1.5-M08		1.5	3	6	2.85	4.5	8	50	2	●	

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter High-performance machining

**PM-2BP**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade KMG405
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
PM-2BP-R1.5-M12		1.5	3	6	2.85	4.5	12	50	2	●
PM-2BP-R1.5-M16		1.5	3	6	2.85	4.5	16	60	2	●
PM-2BP-R2.0-M10		2	4	6	3.85	6	10	60	2	●
PM-2BP-R2.0-M16		2	4	6	3.85	6	16	60	2	●
PM-2BP-R2.0-M20		2	4	6	3.85	6	20	60	2	●
PM-2BP-R2.0-M25		2	4	6	3.85	6		60	2	○
PM-2BP-R2.5-M16		2.5	5	6	4.85	7.5	16	60	2	●
PM-2BP-R2.5-M25		2.5	5	6	4.85	7.5	25	70	2	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


## Torus mill

### High-performance machining

#### PM-2RP



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]								Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L	KMG405		
PM-2RP-D0.5-R0.1-M04		0.1	0.5	4	0.45	0.6	4	50	2	●	
PM-2RP-D0.5-R0.1-M08		0.1	0.5	4	0.45	0.7	8	50	2	○	
PM-2RP-D0.5-R0.1-M06		0.1	0.5	4	0.45	0.7	6	50	2	●	
PM-2RP-D0.5-R0.05-M06		0.05	0.5	4	0.45	0.7	6	50	2	●	
PM-2RP-D0.5-R0.05-M08		0.05	0.5	4	0.45	0.7	8	50	2	○	
PM-2RP-D0.5-R0.05-M04		0.05	0.5	4	0.45	0.6	4	50	2	●	
PM-2RP-D0.8-R0.1-M04		0.1	0.8	4	0.75	1.2	4	50	2	●	
PM-2RP-D0.8-R0.1-M08		0.1	0.8	4	0.75	1.2	8	50	2	●	
PM-2RP-D0.8-R0.2-M04		0.2	0.8	4	0.75	1.2	4	50	2	●	
PM-2RP-D0.8-R0.1-M10		0.1	0.8	4	0.75	1.2	10	50	2	○	
PM-2RP-D0.8-R0.2-M08		0.2	0.8	4	0.75	1.2	8	50	2	●	
PM-2RP-D0.8-R0.2-M10		0.2	0.8	4	0.75	1.2	10	50	2	○	
PM-2RP-D0.8-R0.1-M06		0.1	0.8	4	0.75	1.2	6	50	2	●	
PM-2RP-D0.8-R0.2-M06		0.2	0.8	4	0.75	1.2	6	50	2	●	
PM-2RP-D1.0-R0.3-M12		0.3	1	4	0.95	1.5	12	50	2	●	
PM-2RP-D1.0-R0.3-M08		0.3	1	4	0.95	1.5	8	50	2	●	
PM-2RP-D1.0-R0.2-M16		0.2	1	4	0.95	1.5	16	60	2	●	
PM-2RP-D1.0-R0.2-M14		0.2	1	4	0.95	1.5	14	50	2	○	
PM-2RP-D1.0-R0.1-M20		0.1	1	4	0.95	1.5	20	60	2	●	
PM-2RP-D1.0-R0.3-M10		0.3	1	4	0.95	1.5	10	50	2	●	
PM-2RP-D1.0-R0.1-M10		0.1	1	4	0.95	1.5	10	50	2	●	
PM-2RP-D1.0-R0.1-M12		0.1	1	4	0.95	1.5	12	50	2	●	
PM-2RP-D1.0-R0.3-M04		0.3	1	4	0.95	1.5	4	50	2	●	
PM-2RP-D1.0-R0.2-M04		0.2	1	4	0.95	1.5	4	50	2	●	
PM-2RP-D1.0-R0.2-M12		0.2	1	4	0.95	1.5	12	50	2	●	
PM-2RP-D1.0-R0.1-M14		0.1	1	4	0.95	1.5	14	50	2	○	
PM-2RP-D1.0-R0.2-M08		0.2	1	4	0.95	1.5	8	50	2	●	
PM-2RP-D1.0-R0.1-M06		0.1	1	4	0.95	1.5	6	50	2	●	
PM-2RP-D1.0-R0.2-M20		0.2	1	4	0.95	1.5	20	60	2	●	
PM-2RP-D1.0-R0.1-M04		0.1	1	4	0.95	1.5	4	50	2	●	
PM-2RP-D1.0-R0.3-M06		0.3	1	4	0.95	1.5	6	50	2	●	
PM-2RP-D1.0-R0.1-M16		0.1	1	4	0.95	1.5	16	60	2	●	
PM-2RP-D1.0-R0.2-M06		0.2	1	4	0.95	1.5	6	50	2	●	
PM-2RP-D1.0-R0.2-M10		0.2	1	4	0.95	1.5	10	50	2	●	
PM-2RP-D1.0-R0.1-M08		0.1	1	4	0.95	1.5	8	50	2	●	
PM-2RP-D1.2-R0.2-M16		0.2	1.2	4	1.5	1.8	16	60	2	○	
PM-2RP-D1.2-R0.1-M08		0.1	1.2	4	1.15	1.8	8	50	2	●	

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541







A

## Torus mill **High-performance machining**

### PM-2RP



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

B

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
PM-2RP-D1.2-R0.1-M16		0.1	1.2	4	1.5	1.8	16	60	2	○
PM-2RP-D1.2-R0.2-M12		0.2	1.2	4	1.15	1.8	12	50	2	●
PM-2RP-D1.2-R0.1-M06		0.1	1.2	4	1.15	1.8	6	50	2	●
PM-2RP-D1.2-R0.2-M10		0.2	1.2	4	1.15	1.8	10	50	2	●
PM-2RP-D1.2-R0.1-M12		0.1	1.2	4	1.15	1.8	12	50	2	●
PM-2RP-D1.2-R0.2-M06		0.2	1.2	4	1.15	1.8	6	50	2	●
PM-2RP-D1.2-R0.2-M08		0.2	1.2	4	1.15	1.8	8	50	2	●
PM-2RP-D1.2-R0.1-M10		0.1	1.2	4	1.15	1.8	10	50	2	●
PM-2RP-D1.5-R0.3-M12		0.3	1.5	4	1.45	2.3	12	50	2	●
PM-2RP-D1.5-R0.3-M10		0.3	1.5	4	1.45	2.3	10	50	2	●
PM-2RP-D1.5-R0.2-M12		0.2	1.5	4	1.45	2.3	12	50	2	●
PM-2RP-D1.5-R0.3-M08		0.3	1.5	4	1.45	2.3	8	50	2	●
PM-2RP-D1.5-R0.2-M06		0.2	1.5	4	1.45	2.3	6	50	2	●
PM-2RP-D1.5-R0.2-M10		0.2	1.5	4	1.45	2.3	10	50	2	●
PM-2RP-D1.5-R0.2-M14		0.2	1.5	4	1.45	2.3	14	50	2	○
PM-2RP-D1.5-R0.2-M20		0.2	1.5	4	1.45	2.3	20	50	2	○
PM-2RP-D1.5-R0.3-M18		0.3	1.5	4	1.45	2.3	18	50	2	○
PM-2RP-D1.5-R0.3-M20		0.3	1.5	4	1.45	2.3	20	50	2	○
PM-2RP-D1.5-R0.3-M06		0.3	1.5	4	1.45	2.3	6	50	2	●
PM-2RP-D1.5-R0.2-M08		0.2	1.5	4	1.45	2.3	8	50	2	●
PM-2RP-D1.5-R0.2-M18		0.2	1.5	4	1.45	2.3	18	50	2	○
PM-2RP-D1.5-R0.2-M16		0.2	1.5	4	1.45	2.3	16	50	2	●
PM-2RP-D1.5-R0.3-M16		0.3	1.5	4	1.45	2.3	16	50	2	●
PM-2RP-D1.5-R0.3-M14		0.3	1.5	4	1.45	2.3	14	50	2	○
PM-2RP-D2.0-R0.5-M06		0.5	2	4	1.95	3	6	50	2	●
PM-2RP-D2.0-R0.2-M10		0.2	2	4	1.95	3	10	50	2	●
PM-2RP-D2.0-R0.5-M20		0.5	2	4	1.97	3	20	50	2	●
PM-2RP-D2.0-R0.5-M08		0.5	2	4	1.95	3	8	50	2	●
PM-2RP-D2.0-R0.5-M16		0.5	2	4	1.95	3	16	50	2	●
PM-2RP-D2.0-R0.2-M08		0.2	2	4	1.95	3	8	50	2	●
PM-2RP-D2.0-R0.2-M16		0.2	2	4	1.95	3	16	50	2	●
PM-2RP-D2.0-R0.5-M12		0.5	2	4	1.95	3	12	50	2	●
PM-2RP-D2.0-R0.5-M14		0.5	2	4	1.95	3	14	50	2	○
PM-2RP-D2.0-R0.5-M10		0.5	2	4	1.95	3	10	50	2	●
PM-2RP-D2.0-R0.2-M18		0.2	2	4	1.96	3	18	50	2	○
PM-2RP-D2.0-R0.2-M12		0.2	2	4	1.95	3	12	50	2	●
PM-2RP-D2.0-R0.5-M18		0.5	2	4	1.96	3	18	50	2	○

● Ex stock ○ On demand

\* With internal cooling

C

D

Technical Information

E

Index

### Application field


P	M	K	N	S	H	
✓	✓	✓			✓	✓ Very suitable
						✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541

**Torus mill** **High-performance machining**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]								Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L	KMG405		
PM-2RP-D2.0-R0.2-M20		0.2	2	4	1.97	3	20	50	2	●	
PM-2RP-D2.0-R0.2-M06		0.2	2	4	1.95	3	6	50	2	●	
PM-2RP-D2.0-R0.2-M14		0.2	2	4	1.95	3	14	50	2	○	
PM-2RP-D2.5-R0.2-M16		0.2	2.5	4	2.4	3.7	16	60	2	○	
PM-2RP-D2.5-R0.2-M18		0.2	2.5	4	2.4	3.7	18	60	2	○	
PM-2RP-D2.5-R0.2-M08		0.2	2.5	4	2.4	3.7	8	50	2	●	
PM-2RP-D2.5-R0.2-M20		0.2	2.5	4	2.4	3.7	20	60	2	●	
PM-2RP-D2.5-R0.5-M14		0.5	2.5	4	2.4	3.7	14	50	2	○	
PM-2RP-D2.5-R0.5-M20		0.5	2.5	4	2.4	3.7	20	60	2	●	
PM-2RP-D2.5-R0.5-M10		0.5	2.5	4	2.4	3.7	10	50	2	●	
PM-2RP-D2.5-R0.5-M18		0.5	2.5	4	2.4	3.7	18	60	2	○	
PM-2RP-D2.5-R0.2-M10		0.2	2.5	4	2.4	3.7	10	50	2	●	
PM-2RP-D2.5-R0.5-M08		0.5	2.5	4	2.4	3.7	8	50	2	●	
PM-2RP-D2.5-R0.5-M12		0.5	2.5	4	2.4	3.7	12	50	2	○	
PM-2RP-D2.5-R0.5-M16		0.5	2.5	4	2.4	3.7	16	60	2	○	
PM-2RP-D2.5-R0.2-M14		0.2	2.5	4	2.4	3.7	14	50	2	○	
PM-2RP-D2.5-R0.2-M12		0.2	2.5	4	2.4	3.7	12	50	2	○	
PM-2RP-D3.0-R0.5-M18		0.5	3	6	2.85	4.5	18	60	2	○	
PM-2RP-D3.0-R0.2-M18		0.2	3	6	2.85	4.5	18	60	2	○	
PM-2RP-D3.0-R0.5-M08		0.5	3	6	2.85	4.5	8	50	2	●	
PM-2RP-D3.0-R0.2-M08		0.2	3	6	2.85	4.5	8	50	2	●	
PM-2RP-D3.0-R0.2-M06		0.2	3	6	2.85	4.5	6	50	2	○	
PM-2RP-D3.0-R0.2-M20		0.2	3	6	2.85	4.5	20	60	2	●	
PM-2RP-D3.0-R0.5-M10		0.5	3	6	2.85	4.5	10	50	2	●	
PM-2RP-D3.0-R0.2-M10		0.2	3	6	2.85	4.5	10	50	2	●	
PM-2RP-D3.0-R0.5-M14		0.5	3	6	2.85	4.5	14	60	2	○	
PM-2RP-D3.0-R0.5-M06		0.5	3	6	2.85	4.5	6	50	2	○	
PM-2RP-D3.0-R0.2-M16		0.2	3	6	2.85	4.5	16	60	2	●	
PM-2RP-D3.0-R0.2-M12		0.2	3	6	2.85	4.5	12	50	2	●	
PM-2RP-D3.0-R0.5-M20		0.5	3	6	2.85	4.5	20	60	2	●	
PM-2RP-D3.0-R0.5-M12		0.5	3	6	2.85	4.5	12	50	2	●	
PM-2RP-D3.0-R0.2-M14		0.2	3	6	2.85	4.5	14	60	2	○	
PM-2RP-D3.0-R0.5-M16		0.5	3	6	2.85	4.5	16	60	2	●	
PM-2RP-D4.0-R0.2-M12		0.2	4	6	3.85	6	12	50	2	●	
PM-2RP-D4.0-R0.5-M20		0.5	4	6	3.85	6	20	60	2	●	
PM-2RP-D4.0-R0.5-M12		0.5	4	6	3.85	6	12	50	2	●	
PM-2RP-D4.0-R0.5-M14		0.5	4	6	3.85	6	14	60	2	○	

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## Torus mill High-performance machining

### PM-2RP



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade KMG405
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
PM-2RP-D4.0-R0.2-M20	*	0.2	4	6	3.85	6	20	60	2	●
PM-2RP-D4.0-R0.2-M16	*	0.2	4	6	3.85	6	16	60	2	●
PM-2RP-D4.0-R0.5-M25	*	0.5	4	6	3.85	6	25	60	2	●
PM-2RP-D4.0-R0.5-M16	*	0.5	4	6	3.85	6	16	60	2	●
PM-2RP-D4.0-R0.2-M25	*	0.2	4	6	3.85	6	25	60	2	●
PM-2RP-D4.0-R0.2-M14	*	0.2	4	6	3.85	6	14	60	2	○
PM-2RP-D5.0-R0.5-M14	*	0.5	5	6	4.85	7.5	14	60	2	○
PM-2RP-D5.0-R0.5-M12	*	0.5	5	6	4.85	7.5	12	60	2	●
PM-2RP-D5.0-R1.0-M12	*	1	5	6	4.85	7.5	12	60	2	●
PM-2RP-D5.0-R0.5-M20	*	0.5	5	6	4.85	7.5	20	70	2	●
PM-2RP-D5.0-R1.0-M14	*	1	5	6	4.85	7.5	14	60	2	○
PM-2RP-D5.0-R0.5-M25	*	0.5	5	6	4.85	7.5	25	70	2	●
PM-2RP-D5.0-R1.0-M20	*	1	5	6	4.85	7.5	20	70	2	●
PM-2RP-D5.0-R1.0-M25	*	1	5	6	4.85	7.5	25	70	2	●
PM-2RP-D5.0-R0.5-M16	*	0.5	5	6	4.85	7.5	16	60	2	●
PM-2RP-D5.0-R1.0-M16	*	1	5	6	4.85	7.5	16	60	2	●

- Ex stock ○ On demand
- \* With internal cooling

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index


Application field						
P	M	K	N	S	H	
✓	✓	✓			✓	✓ Very suitable ✓ Suitable

System code > B278



Cutting data > B492

Nonstandard order > B541

**End mill** High-performance machining



- Factory standard
- Centre cutting
- Helix angle 30°

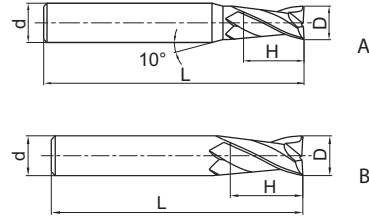

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-2E-D3.0		3	6	8	50	2	A	●
EPM-2E-D4.0		4	6	11	50	2	A	●
EPM-2E-D5.0		5	6	13	50	2	A	●
EPM-2E-D6.0		6	6	16	50	2	B	●
EPM-2E-D8.0		8	8	20	60	2	B	●
EPM-2E-D10.0		10	10	25	75	2	B	●
EPM-2E-D12.0		12	12	30	75	2	B	●
EPM-2E-D14.0		14	14	32	75	2	B	●
EPM-2E-D16.0		16	16	45	100	2	B	●
EPM-2E-D18.0		18	18	45	100	2	B	●
EPM-2E-D20.0		20	20	45	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling


Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable


**A**

## End mill High-performance machining

### EPM-2E-W



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 30°

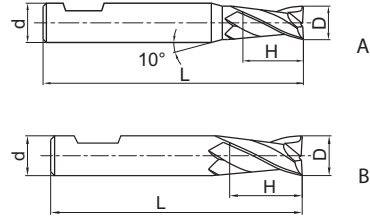

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-2E-D3.0-W		3	6	4	50	2	A	●
EPM-2E-D4.0-W		4	6	5	54	2	A	●
EPM-2E-D5.0-W		5	6	6	54	2	A	●
EPM-2E-D6.0-W		6	6	7	54	2	B	●
EPM-2E-D8.0-W		8	8	9	58	2	B	●
EPM-2E-D10.0-W		10	10	11	66	2	B	●
EPM-2E-D12.0-W		12	12	12	73	2	B	●
EPM-2E-D14.0-W		14	14	14	75	2	B	●
EPM-2E-D16.0-W		16	16	16	82	2	B	●
EPM-2E-D18.0-W		18	18	18	84	2	B	●
EPM-2E-D20.0-W		20	20	20	92	2	B	●

- Ex stock ○ On demand
- \* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill long cutting edge** **High-performance machining**

**EPM-2EL**



- Factory standard
- Centre cutting
- Helix angle 30°

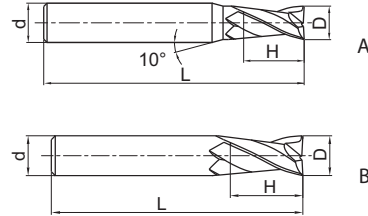

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-2EL-D3.0		3	6	12	75	2	A	●
EPM-2EL-D4.0		4	6	15	75	2	A	●
EPM-2EL-D5.0		5	6	20	75	2	A	●
EPM-2EL-D6.0		6	6	20	75	2	B	●
EPM-2EL-D8.0		8	8	25	100	2	B	●
EPM-2EL-D10.0		10	10	30	100	2	B	●
EPM-2EL-D12.0		12	12	35	100	2	B	●
EPM-2EL-D14.0		14	14	40	100	2	B	●
EPM-2EL-D16.0		16	16	50	150	2	B	●
EPM-2EL-D20.0		20	20	55	150	2	B	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**


Index




**A**

## End mill long cutting edge High-performance machining

### EPM-2EL-W



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 30°

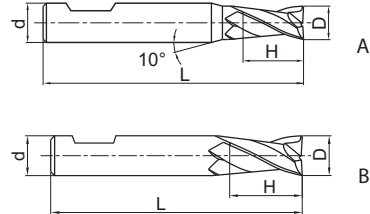

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-2EL-D3.0-W		3	6	6	57	2	A	●
EPM-2EL-D4.0-W		4	6	8	57	2	A	●
EPM-2EL-D5.0-W		5	6	10	57	2	A	●
EPM-2EL-D6.0-W		6	6	10	57	2	B	●
EPM-2EL-D8.0-W		8	8	16	63	2	B	●
EPM-2EL-D10.0-W		10	10	19	72	2	B	●
EPM-2EL-D12.0-W		12	12	22	83	2	B	●
EPM-2EL-D14.0-W		14	14	22	83	2	B	●
EPM-2EL-D16.0-W		16	16	26	92	2	B	●
EPM-2EL-D18.0-W		18	18	26	92	2	B	●
EPM-2EL-D20.0-W		20	20	32	104	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492



Nonstandard order > B541

**End mill** **High-performance machining**

**EPM-4E**



- Factory standard
- Centre cutting
- Helix angle 45°

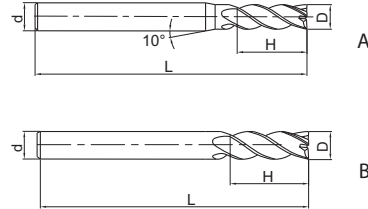

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-4E-D3.0		3	6	8	50	4	A	●
EPM-4E-D4.0		4	6	11	50	4	A	●
EPM-4E-D5.0		5	6	13	50	4	A	●
EPM-4E-D6.0		6	6	16	50	4	B	●
EPM-4E-D8.0		8	8	20	60	4	B	●
EPM-4E-D10.0		10	10	25	75	4	B	●
EPM-4E-D12.0		12	12	30	75	4	B	●
EPM-4E-D14.0		14	14	32	75	4	B	●
EPM-4E-D16.0		16	16	45	100	4	B	●
EPM-4E-D18.0		18	18	45	100	4	B	●
EPM-4E-D20.0		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## End mill High-performance machining

### EPM-4E-W



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 45°

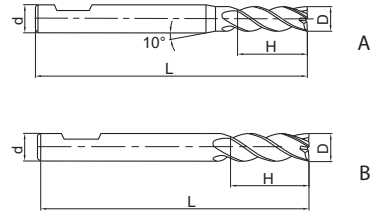

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-4E-D3.0-W		3	6	4	50	4	A	●
EPM-4E-D4.0-W		4	6	5	54	4	A	●
EPM-4E-D5.0-W		5	6	6	54	4	A	●
EPM-4E-D6.0-W		6	6	7	54	4	B	●
EPM-4E-D8.0-W		8	8	9	58	4	B	●
EPM-4E-D10.0-W		10	10	11	66	4	B	●
EPM-4E-D12.0-W		12	12	12	73	4	B	●
EPM-4E-D14.0-W		14	14	14	75	4	B	●
EPM-4E-D16.0-W		16	16	16	82	4	B	●
EPM-4E-D18.0-W		18	18	18	84	4	B	●
EPM-4E-D20.0-W		20	20	20	92	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill long cutting edge** **High-performance machining**

**EPM-4EL**



- Factory standard
- Centre cutting
- Helix angle 45°

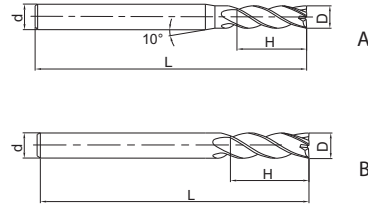

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-4EL-D3.0		3	6	12	75	4	A	●
EPM-4EL-D4.0		4	6	15	75	4	A	●
EPM-4EL-D5.0		5	6	20	75	4	A	●
EPM-4EL-D6.0		6	6	20	75	4	B	●
EPM-4EL-D8.0		8	8	25	100	4	B	●
EPM-4EL-D10.0		10	10	30	100	4	B	●
EPM-4EL-D12.0		12	12	35	100	4	B	●
EPM-4EL-D14.0		14	14	40	100	4	B	●
EPM-4EL-D16.0		16	16	50	150	4	B	●
EPM-4EL-D20.0		20	20	55	150	4	B	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**


Index




**A**

## End mill long cutting edge High-performance machining

### EPM-4EL-W



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 45°

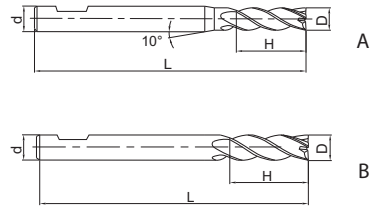

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
EPM-4EL-D3.0-W		3	6	8	57	4	A	●
EPM-4EL-D4.0-W		4	6	11	57	4	A	●
EPM-4EL-D5.0-W		5	6	13	57	4	A	●
EPM-4EL-D6.0-W		6	6	13	57	4	B	●
EPM-4EL-D8.0-W		8	8	19	63	4	B	●
EPM-4EL-D10.0-W		10	10	22	72	4	B	●
EPM-4EL-D12.0-W		12	12	26	83	4	B	●
EPM-4EL-D14.0-W		14	14	26	83	4	B	●
EPM-4EL-D16.0-W		16	16	32	92	4	B	●
EPM-4EL-D18.0-W		18	18	32	92	4	B	●
EPM-4EL-D20.0-W		20	20	38	104	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **High-performance machining**

**EPM-2B**



- Factory standard
- Centre cutting
- Helix angle 30°

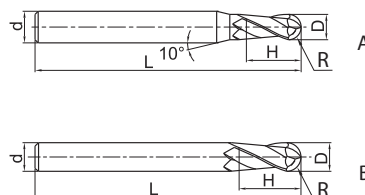

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-2B-R1.5		1.5	3	6	6	50	2	A	●
EPM-2B-R2.0		2	4	6	8	50	2	A	●
EPM-2B-R2.5		2.5	5	6	10	50	2	A	●
EPM-2B-R3.0		3	6	6	12	50	2	B	●
EPM-2B-R4.0		4	8	8	16	60	2	B	●
EPM-2B-R5.0		5	10	10	20	75	2	B	●
EPM-2B-R6.0		6	12	12	24	75	2	B	●
EPM-2B-R7.0		7	14	14	28	75	2	B	●
EPM-2B-R8.0		8	16	16	32	100	2	B	●
EPM-2B-R10.0		10	20	20	40	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## Ball nose cutter High-performance machining

### EPM-2B-W



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 30°

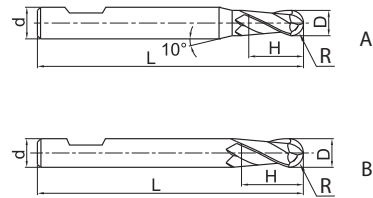

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-2B-R1.5-W		1.5	3	6	4	50	2	A	●
EPM-2B-R2.0-W		2	4	6	5	54	2	A	●
EPM-2B-R2.5-W		2.5	5	6	6	54	2	A	●
EPM-2B-R3.0-W		3	6	6	7	54	2	B	●
EPM-2B-R4.0-W		4	8	8	9	58	2	B	●
EPM-2B-R5.0-W		5	10	10	11	66	2	B	●
EPM-2B-R6.0-W		6	12	12	12	73	2	B	●
EPM-2B-R8.0-W		8	16	16	16	83	2	B	●
EPM-2B-R10.0-W		10	20	20	20	92	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** **High-performance machining**

**EPM-2BL**



- Factory standard
- Centre cutting
- Helix angle 30°

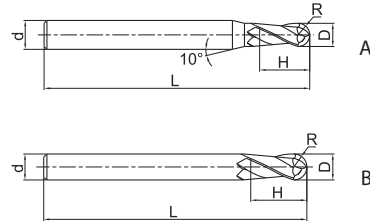

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-2BL-R1.5		1.5	3	6	6	75	2	A	●
EPM-2BL-R2.0		2	4	6	8	75	2	A	●
EPM-2BL-R2.5		2.5	5	6	10	75	2	A	●
EPM-2BL-R3.0		3	6	6	12	75	2	B	●
EPM-2BL-R4.0		4	8	8	16	100	2	B	●
EPM-2BL-R5.0		5	10	10	20	100	2	B	●
EPM-2BL-R6.0		6	12	12	24	100	2	B	●
EPM-2BL-R7.0		7	14	14	28	100	2	B	●
EPM-2BL-R8.0		8	16	16	32	150	2	B	●
EPM-2BL-R10.0		10	20	20	40	150	2	B	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter long shank High-performance machining

**EPM-2BL-W**



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 30°

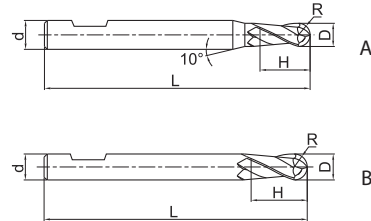

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-2BL-R1.5-W		1.5	3	6	4	57	2	A	●
EPM-2BL-R2.0-W		2	4	6	5	57	2	A	●
EPM-2BL-R2.5-W		2.5	5	6	6	57	2	A	●
EPM-2BL-R3.0-W		3	6	6	7	57	2	B	●
EPM-2BL-R4.0-W		4	8	8	9	63	2	B	●
EPM-2BL-R5.0-W		5	10	10	11	72	2	B	●
EPM-2BL-R6.0-W		6	12	12	12	83	2	B	●
EPM-2BL-R8.0-W		8	16	16	16	92	2	B	●
EPM-2BL-R10.0-W		10	20	20	20	104	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **High-performance machining**

**EPM-4B**



- Factory standard
- Centre cutting
- Helix angle 30°

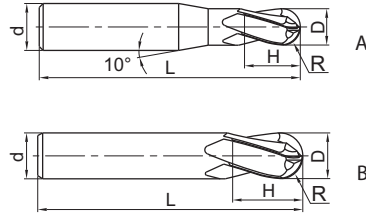

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-4B-R1.5		1.5	3	6	6	50	4	A	●
EPM-4B-R2.0		2	4	6	8	50	4	A	●
EPM-4B-R2.5		2.5	5	6	10	50	4	A	●
EPM-4B-R3.0		3	6	6	12	50	4	B	●
EPM-4B-R4.0		4	8	8	16	60	4	B	●
EPM-4B-R5.0		5	10	10	20	75	4	B	●
EPM-4B-R6.0		6	12	12	24	75	4	B	●
EPM-4B-R7.0		7	14	14	28	75	4	B	●
EPM-4B-R8.0		8	16	16	32	100	4	B	●
EPM-4B-R9.0		9	18	18	36	100	4	B	●
EPM-4B-R10.0		10	20	20	40	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## Ball nose cutter High-performance machining

### EPM-4B-W



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 30°

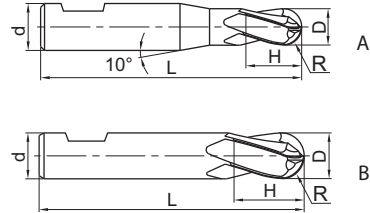

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-4B-R1.5-W	*	1.5	3	6	4	50	4	A	●
EPM-4B-R2.0-W		2	4	6	5	54	4	A	●
EPM-4B-R2.5-W		2.5	5	6	6	54	4	A	●
EPM-4B-R3.0-W		3	6	6	7	54	4	B	●
EPM-4B-R4.0-W		4	8	8	9	58	4	B	●
EPM-4B-R5.0-W		5	10	10	11	66	4	B	●
EPM-4B-R6.0-W		6	12	12	12	73	4	B	●
EPM-4B-R7.0-W		7	14	14	14	75	4	B	●
EPM-4B-R8.0-W		8	16	16	16	83	4	B	●
EPM-4B-R9.0-W		9	18	18	18	84	4	B	●
EPM-4B-R10.0-W		10	20	20	20	92	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** **High-performance machining**

**EPM-4BL**



- Factory standard
- Centre cutting
- Helix angle 30°

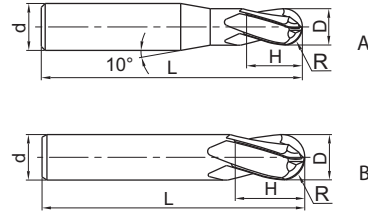

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-4BL-R1.5		1.5	3	6	6	75	4	A	●
EPM-4BL-R2.0		2	4	6	8	75	4	A	●
EPM-4BL-R2.5		2.5	5	6	10	75	4	A	●
EPM-4BL-R3.0		3	6	6	12	75	4	B	●
EPM-4BL-R4.0		4	8	8	16	100	4	B	●
EPM-4BL-R5.0		5	10	10	20	100	4	B	●
EPM-4BL-R6.0		6	12	12	24	100	4	B	●
EPM-4BL-R7.0		7	14	14	28	100	4	B	●
EPM-4BL-R8.0		8	16	16	32	150	4	B	●
EPM-4BL-R10.0		10	20	20	40	150	4	B	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter long shank High-performance machining

**EPM-4BL-W**



- Type of shank DIN 6535HB
- Centre cutting
- Helix angle 30°

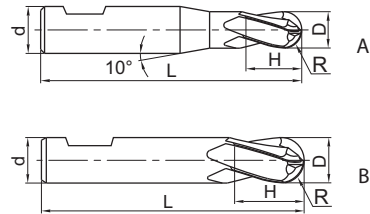

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG406
EPM-4BL-R1.5-W		1.5	3	6	4	57	4	A	●
EPM-4BL-R2.0-W		2	4	6	5	57	4	A	●
EPM-4BL-R2.5-W		2.5	5	6	6	57	4	A	●
EPM-4BL-R3.0-W		3	6	6	7	57	4	B	●
EPM-4BL-R4.0-W		4	8	8	9	63	4	B	●
EPM-4BL-R5.0-W		5	10	10	11	72	4	B	●
EPM-4BL-R6.0-W		6	12	12	12	83	4	B	●
EPM-4BL-R8.0-W		8	16	16	16	92	4	B	●
EPM-4BL-R10.0-W		10	20	20	20	104	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **High-performance machining**

**VPM-4E**



- Factory standard
- Centre cutting
- Helix angle 36°/38°

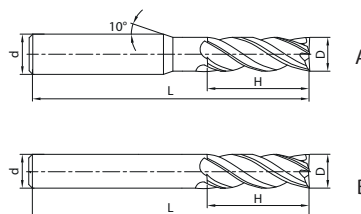

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG406
VPM-4E-D3.0		3	6	8	50	4	A	●
VPM-4E-D4.0		4	6	11	50	4	A	●
VPM-4E-D5.0		5	6	13	50	4	A	●
VPM-4E-D6.0		6	6	16	50	4	B	●
VPM-4E-D7.0		7	8	20	60	4	A	●
VPM-4E-D8.0		8	8	20	60	4	B	●
VPM-4E-D9.0		9	10	22	75	4	A	●
VPM-4E-D10.0		10	10	25	75	4	B	●
VPM-4E-D11.0		11	12	26	75	4	A	●
VPM-4E-D12.0		12	12	30	75	4	B	●
VPM-4E-D14.0		14	14	32	75	4	B	●
VPM-4E-D16.0		16	16	45	100	4	B	●
VPM-4E-D18.0		18	18	45	100	4	B	●
VPM-4E-D20.0		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



## Notes

**A**

Turning

**B**

Milling

**C**

Drilling

**D**


Technical  
Information

**E**


Index

**End mill** **Hard machining**

**HM-2E**



- Factory standard
- Centre cutting
- Helix angle 35°

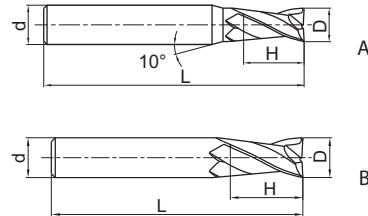

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG555
HM-2E-D1.0S		1	4	3	50	2	A	●
HM-2E-D1.5S		1.5	4	4	50	2	A	●
HM-2E-D2.0S		2	4	6	50	2	A	●
HM-2E-D2.5S		2.5	4	8	50	2	A	●
HM-2E-D3.0S		3	4	8	50	2	A	●
HM-2E-D4.0S		4	4	11	50	2	B	●
HM-2E-D1.0		1	6	3	50	2	A	●
HM-2E-D1.5		1.5	6	4	50	2	A	●
HM-2E-D2.0		2	6	6	50	2	A	●
HM-2E-D2.5		2.5	6	8	50	2	A	●
HM-2E-D3.0		3	6	8	50	2	A	●
HM-2E-D3.5		3.5	6	10	50	2	A	●
HM-2E-D4.0		4	6	11	50	2	A	●
HM-2E-D4.5		4.5	6	11	50	2	A	●
HM-2E-D5.0		5	6	13	50	2	A	●
HM-2E-D5.5		5.5	6	16	50	2	A	●
HM-2E-D6.0		6	6	16	50	2	B	●
HM-2E-D7.0		7	8	20	60	2	A	●
HM-2E-D8.0		8	8	20	60	2	B	●
HM-2E-D9.0		9	10	22	75	2	A	●
HM-2E-D10.0		10	10	25	75	2	B	●
HM-2E-D11.0		11	12	26	75	2	A	○
HM-2E-D12.0		12	12	30	75	2	B	●
HM-2E-D14.0		14	14	32	100	2	B	●
HM-2E-D16.0		16	16	45	100	2	B	●
HM-2E-D18.0		18	18	45	100	2	B	○
HM-2E-D20.0		20	20	45	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information


**E**

Index


**A**

## End mill short cutting edge Hard machining

**HM-2EFP**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG555
HM-2EFP-D6.0		6	6	5.8	9	30	75	2	○
HM-2EFP-D8.0		8	8	7.8	12	40	100	2	○
HM-2EFP-D10.0		10	10	9.6	15	50	100	2	○
HM-2EFP-D12.0		12	12	11.5	18	50	100	2	○
HM-2EFP-D16.0		16	16	15.5	24	50	150	2	○
HM-2EFP-D20.0		20	20	19.5	30	60	150	2	○

- Ex stock ○ On demand
- \* With internal cooling

Milling

**C**

Application field					
P	M	K	N	S	H
					✓

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **Hard machining**

**HM-2EP**



- Straight shank
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]						Teeth	Grade KMG555
		D	d (h6)	d <sub>1</sub>	H	M	L		
HM-2EP-D0.5-M04		0.5	4	0.45	0.7	4	50	2	●
HM-2EP-D0.5-M06		0.5	4	0.45	0.7	6	50	2	●
HM-2EP-D0.5-M08		0.5	4	0.45	0.7	8	50	2	●
HM-2EP-D0.8-M04		0.8	4	0.75	1.2	4	50	2	●
HM-2EP-D0.8-M06		0.8	4	0.75	1.2	6	50	2	●
HM-2EP-D0.8-M08		0.8	4	0.75	1.2	8	50	2	●
HM-2EP-D0.8-M10		0.8	4	0.75	1.2	10	50	2	●
HM-2EP-D1.0-M04		1	4	0.95	1.5	4	50	2	●
HM-2EP-D1.0-M06		1	4	0.95	1.5	6	50	2	●
HM-2EP-D1.0-M08		1	4	0.95	1.5	8	50	2	●
HM-2EP-D1.0-M10		1	4	0.95	1.5	10	50	2	●
HM-2EP-D1.0-M12		1	4	0.95	1.5	12	50	2	●
HM-2EP-D1.0-M14		1	4	0.95	1.5	14	50	2	●
HM-2EP-D1.2-M06		1.2	4	1.15	1.8	6	50	2	●
HM-2EP-D1.2-M08		1.2	4	1.15	1.8	8	50	2	●
HM-2EP-D1.2-M10		1.2	4	1.15	1.8	10	50	2	●
HM-2EP-D1.2-M12		1.2	4	1.15	1.8	12	50	2	●
HM-2EP-D1.5-M06		1.5	4	1.45	2.3	6	50	2	●
HM-2EP-D1.5-M08		1.5	4	1.45	2.3	8	50	2	●
HM-2EP-D1.5-M10		1.5	4	1.45	2.3	10	50	2	●
HM-2EP-D1.5-M12		1.5	4	1.45	2.3	12	50	2	●
HM-2EP-D1.5-M14		1.5	4	1.45	2.3	14	50	2	●
HM-2EP-D2.0-M06		2	4	1.95	3	6	50	2	●
HM-2EP-D2.0-M08		2	4	1.95	3	8	50	2	●
HM-2EP-D2.0-M10		2	4	1.95	3	10	50	2	●
HM-2EP-D2.0-M12		2	4	1.95	3	12	50	2	●
HM-2EP-D2.0-M14		2	4	1.95	3	14	50	2	●
HM-2EP-D2.0-M16		2	4	1.95	3	16	50	2	●
HM-2EP-D2.5-M08		2.5	4	2.4	3.7	8	50	2	●
HM-2EP-D2.5-M10		2.5	4	2.4	3.7	10	50	2	●
HM-2EP-D2.5-M12		2.5	4	2.4	3.7	12	50	2	●
HM-2EP-D2.5-M14		2.5	4	2.4	3.7	14	50	2	●
HM-2EP-D2.5-M16		2.5	4	2.4	3.7	16	60	2	●
HM-2EP-D2.5-M18		2.5	4	2.4	3.7	18	60	2	●
HM-2EP-D2.5-M20		2.5	4	2.4	3.7	20	60	2	●
HM-2EP-D3.0-M06		3	6	2.85	4.5	6	50	2	●
HM-2EP-D3.0-M08		3	6	2.85	4.5	8	50	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index




**A**


End mill

Hard machining

HM-2EP



- Straight shank
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG555
HM-2EP-D3.0-M10		3	6	2.85	4.5	10	50	2	●
HM-2EP-D3.0-M12		3	6	2.85	4.5	12	50	2	●
HM-2EP-D3.0-M14		3	6	2.85	4.5	14	60	2	●
HM-2EP-D3.0-M16		3	6	2.85	4.5	16	60	2	●
HM-2EP-D3.0-M18		3	6	2.85	4.5	18	60	2	●
HM-2EP-D3.0-M20		3	6	2.85	4.5	20	60	2	●
HM-2EP-D4.0-M12		4	6	3.85	6	12	60	2	●
HM-2EP-D4.0-M16		4	6	3.85	6	16	60	2	●
HM-2EP-D4.0-M20		4	6	3.85	6	20	60	2	●
HM-2EP-D4.0-M25		4	6	3.85	6	25	60	2	●
HM-2EP-D5.0-M16		5	6	4.85	7.5	16	60	2	●
HM-2EP-D5.0-M25		5	6	4.85	7.5	25	70	2	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Application field

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **Hard machining**

**HM-2ES**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG555
HM-2ES-D0.3		0.3	4	0.6	50	2	●
HM-2ES-D0.4		0.4	4	0.8	50	2	●
HM-2ES-D0.5		0.5	4	1	50	2	●
HM-2ES-D0.6		0.6	4	1.2	50	2	●
HM-2ES-D0.7		0.7	4	1.4	50	2	●
HM-2ES-D0.8		0.8	4	1.6	50	2	●
HM-2ES-D0.9		0.9	4	1.8	50	2	●
HM-2ES-D1.0		1	4	2	50	2	●
HM-2ES-D1.1		1.1	4	2	50	2	●
HM-2ES-D1.2		1.2	4	2.5	50	2	●
HM-2ES-D1.3		1.3	4	2.5	50	2	●
HM-2ES-D1.4		1.4	4	3	50	2	●
HM-2ES-D1.5		1.5	4	3	50	2	●
HM-2ES-D1.6		1.6	4	3.5	50	2	●
HM-2ES-D1.7		1.7	4	3.5	50	2	●
HM-2ES-D1.8		1.8	4	4	50	2	●
HM-2ES-D1.9		1.9	4	4	50	2	●
HM-2ES-D2.0		2	4	4	50	2	●
HM-2ES-D2.1		2.1	4	4	50	2	●
HM-2ES-D2.2		2.2	4	4.5	50	2	●
HM-2ES-D2.3		2.3	4	4.5	50	2	●
HM-2ES-D2.4		2.4	4	5	50	2	●
HM-2ES-D2.5		2.5	4	5	50	2	●
HM-2ES-D2.6		2.6	4	5	50	2	●
HM-2ES-D2.7		2.7	4	5.5	50	2	●
HM-2ES-D2.8		2.8	4	5.5	50	2	●
HM-2ES-D2.9		2.9	4	6	50	2	●
HM-2ES-D3.0		3	4	6	50	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541



**A**

End mill



Hard machining



HM-4E

- Factory standard
- Centre cutting
- Helix angle 45°

Turning

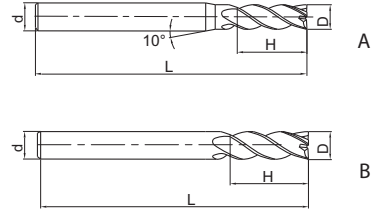

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG555
HM-4E-D1.0S		1	4	3	50	4	A	●
HM-4E-D1.5S		1.5	4	4	50	4	A	●
HM-4E-D2.0S		2	4	6	50	4	A	●
HM-4E-D2.5S		2.5	4	8	50	4	A	●
HM-4E-D3.0S		3	4	8	50	4	A	●
HM-4E-D4.0S		4	4	11	50	4	B	●
HM-4E-D1.0		1	6	3	50	4	A	●
HM-4E-D1.5		1.5	6	4	50	4	A	●
HM-4E-D2.0		2	6	6	50	4	A	●
HM-4E-D2.5		2.5	6	8	50	4	A	●
HM-4E-D3.0		3	6	8	50	4	A	●
HM-4E-D3.5		3.5	6	10	50	4	A	●
HM-4E-D4.0		4	6	11	50	4	A	●
HM-4E-D4.5		4.5	6	11	50	4	A	●
HM-4E-D5.0		5	6	13	50	4	A	●
HM-4E-D5.5		5.5	6	16	50	4	A	●
HM-4E-D6.0		6	6	16	50	4	B	●
HM-4E-D7.0		7	8	20	60	4	A	●
HM-4E-D8.0		8	8	20	60	4	B	●
HM-4E-D9.0		9	10	22	75	4	A	●
HM-4E-D10.0		10	10	25	75	4	B	●
HM-4E-D11.0		11	12	26	75	4	A	●
HM-4E-D12.0		12	12	30	75	4	B	●
HM-4E-D14.0		14	14	32	75	4	B	●
HM-4E-D16.0		16	16	45	100	4	B	●
HM-4E-D18.0		18	18	45	100	4	B	●
HM-4E-D20.0		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable  
 ✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541


End mill long shank

Hard machining

HM-4EL



- Factory standard
- Centre cutting
- Helix angle 45°

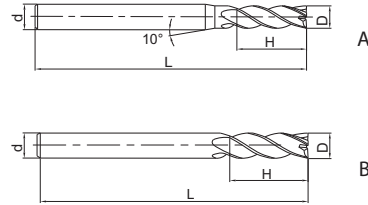

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG555
HM-4EL-D3.0		3	6	12	75	4	A	●
HM-4EL-D4.0		4	6	15	75	4	A	●
HM-4EL-D5.0		5	6	20	75	4	A	●
HM-4EL-D6.0		6	6	20	75	4	B	●
HM-4EL-D8.0		8	8	25	100	4	B	●
HM-4EL-D10.0		10	10	30	100	4	B	●
HM-4EL-D12.0		12	12	35	100	4	B	●
HM-4EL-D14.0		14	14	40	100	4	B	●
HM-4EL-D16.0		16	16	50	150	4	B	●
HM-4EL-D20.0		20	20	55	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492

Nonstandard order > B541




**A**


## End mill short cutting edge Hard machining

Turning

### HM-4EFP



- Factory standard
- Centre cutting
- Helix angle 45°



**B**

Milling

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG555
HM-4EFP-D6.0		6	6	5.8	9	30	75	4	●
HM-4EFP-D8.0		8	8	7.8	12	40	100	4	●
HM-4EFP-D10.0		10	10	9.6	15	50	100	4	●
HM-4EFP-D12.0		12	12	11.5	18	50	100	4	●
HM-4EFP-D16.0		16	16	15.5	24	50	150	4	●
HM-4EFP-D20.0		20	20	19.5	30	60	150	4	○

- Ex stock ○ On demand
- \* With internal cooling

**C**

Drilling

Application field						
P	M	K	N	S	H	
					✓	✓ Suitable
						✓ Very suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

**End mill long cutting edge** **High-speed hard machining**

**5502R55MHH**



- Type of shank DIN 6535HA
- Non-centre cutting
- Helix angle 55°



Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG405	KMG555
5502R55MHH-0300		3	6	8	57	0	0	4	●	●
5502R55MHH-0400		4	6	11	57	0	0	4	●	●
5502R55MHH-0500		5	6	13	57	0	0	5	●	●
5502R55MHH-0600		6	6	13	57	45	0.1	6	●	●
5502R55MHH-0800		8	8	19	63	45	0.1	6	●	●
5502R55MHH-1000		10	10	22	72	45	0.1	6	●	●
5502R55MHH-1200		12	12	26	83	45	0.1	6	●	●
5502R55MHH-1600		16	16	32	92	45	0.1	6	●	●
5502R55MHH-2000		20	20	38	104	45	0.1	8	●	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
					✓

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541




**A**

End mill


Hard machining

Turning

HM-6E



- Factory standard
- Non-centre cutting
- Helix angle 45°



**B**

Milling

Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG555
HM-6E-D6.0		6	6	18	60	6	○
HM-6E-D8.0		8	8	20	60	6	○
HM-6E-D10.0		10	10	30	75	6	○
HM-6E-D12.0		12	12	32	75	6	○
HM-6E-D16.0		16	16	40	100	6	○
HM-6E-D20.0		20	20	45	100	6	●

- Ex stock ○ On demand
- \* With internal cooling

**C**

Drilling

Application field						
P	M	K	N	S	H	
					✓	✓ Suitable
						✓ Very suitable

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


End mill long shank

Hard machining

HM-6EL



- Factory standard
- Non-centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG555
HM-6EL-D6.0		6	6	24	75	6	●
HM-6EL-D8.0		8	8	32	75	6	●
HM-6EL-D10.0		10	10	40	100	6	●
HM-6EL-D12.0		12	12	45	100	6	●
HM-6EL-D16.0		16	16	64	150	6	●
HM-6EL-D20.0		20	20	75	150	6	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
					✓

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

**Ball nose cutter** **Hard machining**

**HM-2B**



- Factory standard
- Centre cutting
- Helix angle 35°

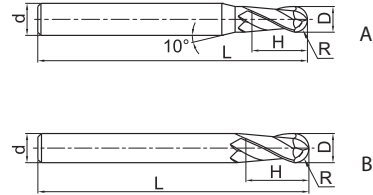

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG555
HM-2B-R0.5S		0.5	1	4	2	50	2	A	●
HM-2B-R0.75S		0.75	1.5	4	3	50	2	A	●
HM-2B-R1.0S		1	2	4	4	50	2	A	●
HM-2B-R1.25S		1.25	2.5	4	5	50	2	A	●
HM-2B-R1.5S		1.5	3	4	6	50	2	A	●
HM-2B-R2.0S		2	4	4	8	50	2	B	●
HM-2B-R0.5		0.5	1	6	2	50	2	A	●
HM-2B-R0.75		0.75	1.5	6	3	50	2	A	●
HM-2B-R1.0		1	2	6	4	50	2	A	●
HM-2B-R1.25		1.25	2.5	6	5	50	2	A	●
HM-2B-R1.5		1.5	3	6	6	50	2	A	●
HM-2B-R1.75		1.75	3.5	6	8	50	2	A	●
HM-2B-R2.0		2	4	6	8	50	2	A	●
HM-2B-R2.5		2.5	5	6	10	50	2	A	●
HM-2B-R2.75		2.75	5.5	6	12	50	2	A	●
HM-2B-R3.0		3	6	6	12	50	2	B	●
HM-2B-R3.5		3.5	7	8	14	60	2	A	●
HM-2B-R4.0		4	8	8	16	60	2	B	●
HM-2B-R4.5		4.5	9	10	18	75	2	A	●
HM-2B-R5.0		5	10	10	20	75	2	B	●
HM-2B-R6.0		6	12	12	24	75	2	B	●
HM-2B-R7.0		7	14	14	28	75	2	B	●
HM-2B-R8.0		8	16	16	32	100	2	B	●
HM-2B-R10.0		10	20	20	40	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
					✓

✓ Very suitable


✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541

**Ball nose cutter long shank** **Hard machining**



- Factory standard
- Centre cutting
- Helix angle 35°

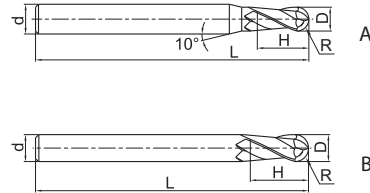

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG555
HM-2BL-R1.0		1	2	6	4	75	2	A	●
HM-2BL-R1.25		1.25	2.5	6	6	75	2	A	●
HM-2BL-R1.5		1.5	3	6	6	75	2	A	●
HM-2BL-R1.75		1.75	3.5	6	8	75	2	A	●
HM-2BL-R2.0		2	4	6	8	75	2	A	●
HM-2BL-R2.5		2.5	5	6	10	75	2	A	●
HM-2BL-R2.75		2.75	5.5	6	12	75	2	A	●
HM-2BL-R3.0		3	6	6	12	75	2	B	●
HM-2BL-R3.5		3.5	7	8	14	75	2	A	●
HM-2BL-R4.0		4	8	8	16	100	2	B	●
HM-2BL-R4.5		4.5	9	10	18	100	2	A	●
HM-2BL-R5.0		5	10	10	20	100	2	B	●
HM-2BL-R6.0		6	12	12	24	100	2	B	●
HM-2BL-R7.0		7	14	14	28	100	2	B	●
HM-2BL-R8.0		8	16	16	32	150	2	B	●
HM-2BL-R10.0		10	20	20	40	150	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

- ✓ Very suitable
- ✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index



**A**

## Ball nose cutter short cutting edge Hard machining

**HM-2BFP**



- Factory standard
- Centre cutting
- Helix angle 35°

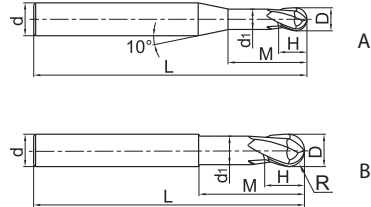

Turning

**B**

Milling

Article	*	Dimensions [mm]								Teeth	Geometry	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L	KMG555			
HM-2BFP-R0.5		0.5	1	6	0.95	1	2.5	75	2	A	●	
HM-2BFP-R0.75		0.75	1.5	6	1.45	1.5	3	75	2	A	●	
HM-2BFP-R1.0		1	2	6	1.95	2	4	75	2	A	●	
HM-2BFP-R1.5		1.5	3	6	2.85	3	6	75	2	A	●	
HM-2BFP-R2.0		2	4	6	3.85	4	8	75	2	A	●	
HM-2BFP-R2.5		2.5	5	6	4.85	5	10	75	2	A	●	
HM-2BFP-R3.0		3	6	6	5.8	6	12	75	2	B	●	
HM-2BFP-R4.0		4	8	8	7.8	8	16	100	2	B	●	
HM-2BFP-R5.0		5	10	10	9.6	10	20	100	2	B	●	
HM-2BFP-R6.0		6	12	12	11.5	12	24	100	2	B	●	
HM-2BFP-R8.0		8	16	16	15.5	16	32	150	2	B	●	
HM-2BFP-R10.0		10	20	20	19.5	20	40	150	2	B	○	

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

### Application field

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **Hard machining**

**HM-2BS**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG555
HM-2BS-R0.15		0.15	0.3	4	0.5	50	2	●
HM-2BS-R0.20		0.2	0.4	4	0.6	50	2	●
HM-2BS-R0.25		0.25	0.5	4	0.8	50	2	●
HM-2BS-R0.30		0.3	0.6	4	0.9	50	2	●
HM-2BS-R0.35		0.35	0.7	4	1	50	2	●
HM-2BS-R0.40		0.4	0.8	4	1.2	50	2	●
HM-2BS-R0.45		0.45	0.9	4	1.3	50	2	●
HM-2BS-R0.50		0.5	1	4	1.5	50	2	●
HM-2BS-R0.60		0.6	1.2	4	1.8	50	2	●
HM-2BS-R0.70		0.7	1.4	4	2	50	2	●
HM-2BS-R0.75		0.75	1.5	4	2.3	50	2	●
HM-2BS-R0.80		0.8	1.6	4	2.5	50	2	●
HM-2BS-R0.90		0.9	1.8	4	2.7	50	2	●
HM-2BS-R1.00		1	2	4	3	50	2	●
HM-2BS-R1.25		1.25	2.5	4	3.7	50	2	●
HM-2BS-R1.50		1.5	3	4	4.5	50	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541




**A**


End mill

Hard machining

HM-2BP



- Straight shank
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade KMG555
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
HM-2BP-R0.25-M04		0.25	0.5	4	0.45	0.7	4	50	2	●
HM-2BP-R0.25-M06		0.25	0.5	4	0.45	0.7	6	50	2	●
HM-2BP-R0.3-M04		0.3	0.6	4	0.55	0.9	4	50	2	●
HM-2BP-R0.3-M06		0.3	0.6	4	0.55	0.9	6	50	2	●
HM-2BP-R0.3-M08		0.3	0.6	4	0.55	0.9	8	50	2	●
HM-2BP-R0.4-M04		0.4	0.8	4	0.75	1.2	4	50	2	●
HM-2BP-R0.4-M06		0.4	0.8	4	0.75	1.2	6	50	2	●
HM-2BP-R0.4-M08		0.4	0.8	4	0.75	1.2	8	50	2	●
HM-2BP-R0.4-M10		0.4	0.8	4	0.75	1.2	10	50	2	●
HM-2BP-R0.5-M04		0.5	1	4	0.95	1.5	4	50	2	●
HM-2BP-R0.5-M06		0.5	1	4	0.95	1.5	6	50	2	●
HM-2BP-R0.5-M08		0.5	1	4	0.95	1.5	8	50	2	●
HM-2BP-R0.5-M10		0.5	1	4	0.95	1.5	10	50	2	●
HM-2BP-R0.5-M12		0.5	1	4	0.95	1.5	12	50	2	●
HM-2BP-R0.6-M06		0.6	1.2	4	1.15	1.8	6	50	2	●
HM-2BP-R0.6-M08		0.6	1.2	4	1.15	1.8	8	50	2	●
HM-2BP-R0.6-M12		0.6	1.2	4	1.15	1.8	12	50	2	●
HM-2BP-R0.6-M16		0.6	1.2	4	1.15	1.8	16	50	2	●
HM-2BP-R0.75-M08		0.75	1.5	4	1.45	2.3	8	50	2	●
HM-2BP-R0.75-M12		0.75	1.5	4	1.45	2.3	12	50	2	●
HM-2BP-R0.75-M16		0.75	1.5	4	1.45	2.3	16	50	2	●
HM-2BP-R1.0-M06		1	2	4	1.95	3	6	50	2	●
HM-2BP-R1.0-M08		1	2	4	1.95	3	8	50	2	●
HM-2BP-R1.0-M10		1	2	4	1.95	3	10	50	2	●
HM-2BP-R1.0-M12		1	2	4	1.95	3	12	50	2	●
HM-2BP-R1.0-M16		1	2	4	1.95	3	16	50	2	●
HM-2BP-R1.0-M20		1	2	4	1.95	3	20	50	2	●
HM-2BP-R1.25-M08		1.25	2.5	4	2.4	3.7	8	50	2	●
HM-2BP-R1.25-M12		1.25	2.5	4	2.4	3.7	12	50	2	●
HM-2BP-R1.25-M16		1.25	2.5	4	2.4	3.7	16	60	2	●
HM-2BP-R1.25-M20		1.25	2.5	4	2.4	3.7	20	60	2	●
HM-2BP-R1.5-M08		1.5	3	6	2.85	4.5	8	50	2	●
HM-2BP-R1.5-M10		1.5	3	6	2.85	4.5	10	50	2	●
HM-2BP-R1.5-M12		1.5	3	6	2.85	4.5	12	50	2	●
HM-2BP-R1.5-M16		1.5	3	6	2.85	4.5	16	60	2	●
HM-2BP-R1.5-M20		1.5	3	6	2.85	4.5	20	60	2	●
HM-2BP-R2.0-M10		2	4	6	3.85	6	10	60	2	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

Application field

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **Hard machining**

HM-2BP



- Straight shank
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG555
HM-2BP-R2.0-M16		2	4	6	3.85	6	16	60	2	●
HM-2BP-R2.0-M20		2	4	6	3.85	6	20	60	2	●
HM-2BP-R2.0-M25		2	4	6	3.85	6	25	60	2	●
HM-2BP-R2.5-M16		2.5	5	6	4.85	7.5	16	60	2	●
HM-2BP-R2.5-M25		2.5	5	6	4.85	7.5	25	70	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index



**A**

## Ball nose cutter Hard machining

### HM-4B



- Factory standard
- Centre cutting
- Helix angle 35°

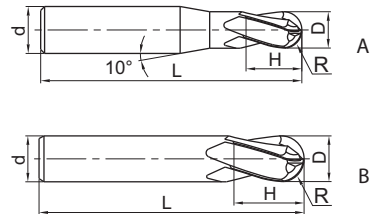

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG555
HM-4B-R1.5		1.5	3	6	6	50	4	A	●
HM-4B-R2.0		2	4	6	8	50	4	A	●
HM-4B-R2.5		2.5	5	6	10	50	4	A	●
HM-4B-R3.0		3	6	6	12	50	4	B	●
HM-4B-R4.0		4	8	8	16	60	4	B	●
HM-4B-R5.0		5	10	10	20	75	4	B	●
HM-4B-R6.0		6	12	12	24	75	4	B	●
HM-4B-R7.0		7	14	14	28	75	4	B	●
HM-4B-R8.0		8	16	16	32	100	4	B	●
HM-4B-R9.0		9	18	18	36	100	4	B	●
HM-4B-R10.0		10	20	20	40	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

### Application field

P	M	K	N	S	H
					✓

✓ Very suitable


✓ Suitable

System code > B278



Cutting data > B492

Nonstandard order > B541

**Ball nose cutter long shank** **Hard machining**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG555
HM-4BL-R1.5		1.5	3	6	6	75	4	A	●
HM-4BL-R2.0		2	4	6	8	75	4	A	●
HM-4BL-R2.5		2.5	5	6	10	75	4	A	●
HM-4BL-R3.0		3	6	6	12	75	4	B	●
HM-4BL-R4.0		4	8	8	16	100	4	B	●
HM-4BL-R5.0		5	10	10	20	100	4	B	●
HM-4BL-R6.0		6	12	12	24	100	4	B	●
HM-4BL-R7.0		7	14	14	28	100	4	B	●
HM-4BL-R8.0		8	16	16	32	150	4	B	●
HM-4BL-R9.0		9	18	18	36	150	4	B	●
HM-4BL-R10.0		10	20	20	40	150	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541






**A**


Torus mill

Hard machining

HM-4R



- Factory standard
- Centre cutting
- Helix angle 35°

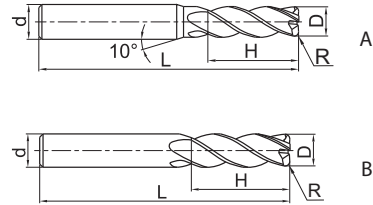

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG555
HM-4R-D3.0R0.2		0.2	3	4	8	50	4	A	●
HM-4R-D4.0R0.3		0.3	4	4	10	50	4	B	●
HM-4R-D4.0R0.5		0.5	4	4	10	50	4	B	●
HM-4R-D5.0R0.5		0.5	5	6	13	50	4	A	●
HM-4R-D5.0R1.0		1	5	6	13	50	4	A	●
HM-4R-D6.0R0.5		0.5	6	6	16	50	4	B	●
HM-4R-D6.0R1.0		1	6	6	16	50	4	B	●
HM-4R-D8.0R0.5		0.5	8	8	20	60	4	B	●
HM-4R-D8.0R1.0		1	8	8	20	60	4	B	●
HM-4R-D10.0R0.5		0.5	10	10	25	75	4	B	●
HM-4R-D10.0R1.0		1	10	10	25	75	4	B	●
HM-4R-D10.0R2.0		2	10	10	25	75	4	B	●
HM-4R-D10.0R3.0		3	10	10	25	75	4	B	●
HM-4R-D12.0R0.5		0.5	12	12	30	75	4	B	●
HM-4R-D12.0R1.0		1	12	12	30	75	4	B	●
HM-4R-D12.0R2.0		2	12	12	30	75	4	B	●
HM-4R-D12.0R3.0		3	12	12	30	75	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**Torus mill short cutting edge** **Hard machining**

**HM-4RF**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMG555
HM-4RF-D6.0R0.5		0.5	6	6	6	50	4	○
HM-4RF-D6.0R1.0		1	6	6	6	50	4	○
HM-4RF-D8.0R0.5		0.5	8	8	8	60	4	○
HM-4RF-D8.0R1.0		1	8	8	8	60	4	○
HM-4RF-D10.0R1.0		1	10	10	10	75	4	○
HM-4RF-D10.0R2.0		2	10	10	10	75	4	○
HM-4RF-D12.0R0.5		0.5	12	12	12	75	4	○
HM-4RF-D12.0R1.0		1	12	12	12	75	4	○
HM-4RF-D12.0R2.0		2	12	12	12	75	4	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Torus mill long shank Hard machining

**HM-4RP**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG555
HM-4RP-D6.0R0.5		0.5	6	6	5.8	6	18	75	4	○
HM-4RP-D6.0R1.0		1	6	6	5.8	6	18	75	4	○
HM-4RP-D8.0R0.5		0.5	8	8	7.8	8	24	100	4	○
HM-4RP-D8.0R1.0		1	8	8	7.8	8	24	100	4	○
HM-4RP-D10.0R0.5		0.5	10	10	9.6	10	30	100	4	○
HM-4RP-D10.0R1.0		1	10	10	9.6	10	30	100	4	○
HM-4RP-D10.0R2.0		2	10	10	9.6	10	30	100	4	○
HM-4RP-D12.0R0.5		0.5	12	12	11.5	12	36	100	4	○
HM-4RP-D12.0R1.0		1	12	12	11.5	12	36	100	4	○
HM-4RP-D12.0R2.0		2	12	12	11.5	12	36	100	4	○
HM-4RP-D16.0R1.0		1	16	16	15.5	16	40	150	4	●
HM-4RP-D16.0R2.0		2	16	16	15.5	16	40	150	4	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

**End mill** **General machining of non-ferrous metals**

**5502R402NM**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 40°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	H	L	KCH	CHW		YK30F
5502R402NM-0300		3	6	8	57	0	0	2	●
5502R402NM-0400		4	6	11	57	0	0	2	●
5502R402NM-0500		5	6	13	57	0	0	2	●
5502R402NM-0600		6	6	13	57	45	0.1	2	●
5502R402NM-0800		8	8	19	63	45	0.1	2	●
5502R402NM-1000		10	10	22	72	45	0.1	2	●
5502R402NM-1200		12	12	26	83	45	0.1	2	●
5502R402NM-1400		14	14	26	83	45	0.15	2	●
5502R402NM-1600		16	16	32	92	45	0.15	2	●
5502R402NM-1800		18	18	32	92	45	0.15	2	●
5502R402NM-2000		20	20	38	104	45	0.15	2	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## End mill General machining of non-ferrous metals

**NM-2E**



- Factory standard
- Centre cutting
- Helix angle 35°

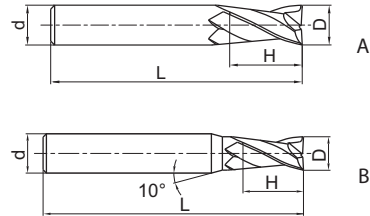

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG309
NM-2E-D1.0		1	4	3	50	2	A	●
NM-2E-D2.0		2	4	6	50	2	A	●
NM-2E-D3.0		3	6	8	50	2	A	●
NM-2E-D4.0		4	6	11	50	2	A	●
NM-2E-D5.0		5	6	13	50	2	A	●
NM-2E-D6.0		6	6	16	50	2	B	●
NM-2E-D8.0		8	8	20	60	2	B	●
NM-2E-D10.0		10	10	25	75	2	B	●
NM-2E-D12.0		12	12	30	75	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **General machining of non-ferrous metals**

**NM-2EP**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG309
NM-2EP-D0.5-M04		0.5	4	0.45	0.7	4	50	2	●
NM-2EP-D0.5-M08		0.5	4	0.45	0.7	8	50	2	●
NM-2EP-D0.5-M06		0.5	4	0.45	0.7	6	50	2	●
NM-2EP-D0.8-M10		0.8	4	0.75	1.2	10	50	2	●
NM-2EP-D0.8-M04		0.8	4	0.75	1.2	4	50	2	●
NM-2EP-D0.8-M08		0.8	4	0.75	1.2	8	50	2	●
NM-2EP-D0.8-M06		0.8	4	0.75	1.2	6	50	2	●
NM-2EP-D1.0-M08		1	4	0.95	1.5	8	50	2	●
NM-2EP-D1.0-M10		1	4	0.95	1.5	10	50	2	●
NM-2EP-D1.0-M14		1	4	0.95	1.5	14	50	2	●
NM-2EP-D1.0-M12		1	4	0.95	1.5	12	50	2	●
NM-2EP-D1.0-M06		1	4	0.95	1.5	6	50	2	●
NM-2EP-D1.0-M04		1	4	0.95	1.5	4	50	2	●
NM-2EP-D1.5-M08		1.5	4	1.45	2.3	8	50	2	●
NM-2EP-D1.5-M16		1.5	4	1.45	2.3	16	50	2	●
NM-2EP-D2.0-M16		2	4	1.95	3	16	50	2	●
NM-2EP-D2.0-M14		2	4	1.95	3	14	50	2	●
NM-2EP-D2.0-M08		2	4	1.95	3	8	50	2	●
NM-2EP-D2.0-M10		2	4	1.95	3	10	50	2	●
NM-2EP-D2.0-M12		2	4	1.95	3	12	50	2	●
NM-2EP-D2.0-M06		2	4	1.95	3	6	50	2	●
NM-2EP-D2.5-M10		2.5	4	2.4	3.7	10	50	2	●
NM-2EP-D2.5-M20		2.5	4	2.4	3.7	20	60	2	●
NM-2EP-D3.0-M20		3	6	2.85	4.5	20	60	2	●
NM-2EP-D3.0-M10		3	6	2.85	4.5	10	50	2	●
NM-2EP-D4.0-M25		4	6	3.85	6	25	60	2	●
NM-2EP-D4.0-M16		4	6	3.85	6	16	60	2	●
NM-2EP-D5.0-M25		5	6	4.85	7.5	25	70	2	●
NM-2EP-D5.0-M16		5	6	4.85	7.5	16	60	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## End mill General machining of non-ferrous metals

**NM-4E**



- Factory standard
- Centre cutting
- Helix angle 35°

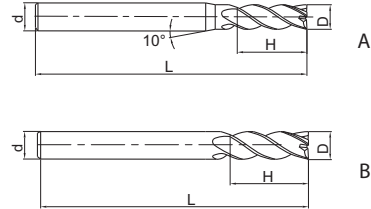

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG309
NM-4E-D3.0		3	6	8	50	4	A	●
NM-4E-D4.0		4	6	11	50	4	A	●
NM-4E-D5.0		5	6	13	50	4	A	●
NM-4E-D6.0		6	6	16	50	4	B	●
NM-4E-D8.0		8	8	20	60	4	B	●
NM-4E-D10.0		10	10	25	75	4	B	●
NM-4E-D12.0		12	12	30	75	4	B	●

- Ex stock ○ On demand
- \* With internal cooling

**C**

Drilling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **General machining of non-ferrous metals**

**NM-2B**



- Factory standard
- Centre cutting
- Helix angle 35°

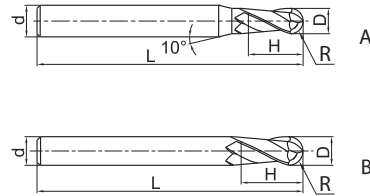

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			KMG309
NM-2B-R0.5		0.5	1	4	2	50	2	A	●
NM-2B-R0.75		0.75	1.5	4	3	50	2	A	●
NM-2B-R1.0		1	2	4	4	50	2	A	●
NM-2B-R1.25		1.25	2.5	4	5	50	2	A	●
NM-2B-R1.5		1.5	3	6	6	50	2	A	●
NM-2B-R1.75		1.75	3.5	6	8	50	2	A	●
NM-2B-R2.0		2	4	6	8	50	2	A	●
NM-2B-R2.5		2.5	5	6	10	50	2	A	●
NM-2B-R3.0		3	6	6	12	50	2	B	●
NM-2B-R4.0		4	8	8	16	60	2	B	●
NM-2B-R5.0		5	10	10	20	75	2	B	●
NM-2B-R6.0		6	12	12	24	75	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541






## Ball nose cutter General machining of non-ferrous metals

**NM-2BP**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG309
NM-2BP-R0.25-M04		0.25	0.5	4	0.45	0.7	4	50	2	●
NM-2BP-R0.25-M06		0.25	0.5	4	0.45	0.7	6	50	2	●
NM-2BP-R0.3-M04		0.3	0.6	4	0.55	0.9	4	50	2	●
NM-2BP-R0.3-M06		0.3	0.6	4	0.55	0.9	6	50	2	●
NM-2BP-R0.3-M08		0.3	0.6	4	0.55	0.9	8	50	2	●
NM-2BP-R0.4-M04		0.4	0.8	4	0.75	1.2	4	50	2	●
NM-2BP-R0.4-M06		0.4	0.8	4	0.75	1.2	6	50	2	●
NM-2BP-R0.4-M08		0.4	0.8	4	0.75	1.2	8	50	2	●
NM-2BP-R0.4-M10		0.4	0.8	4	0.75	1.2	10	50	2	●
NM-2BP-R0.5-M04		0.5	1	4	0.95	1.5	4	50	2	●
NM-2BP-R0.5-M06		0.5	1	4	0.95	1.5	6	50	2	●
NM-2BP-R0.5-M08		0.5	1	4	0.95	1.5	8	50	2	●
NM-2BP-R0.5-M10		0.5	1	4	0.95	1.5	10	50	2	●
NM-2BP-R0.5-M12		0.5	1	4	0.95	1.5	12	50	2	●
NM-2BP-R0.75-M08		0.75	1.5	4	1.45	2.3	8	50	2	●
NM-2BP-R0.75-M16		0.75	1.5	4	1.45	2.3	16	50	2	●
NM-2BP-R1.0-M06		1	2	4	1.95	3	6	50	2	●
NM-2BP-R1.0-M08		1	2	4	1.95	3	8	50	2	●
NM-2BP-R1.0-M10		1	2	4	1.95	3	10	50	2	●
NM-2BP-R1.0-M12		1	2	4	1.95	3	12	50	2	●
NM-2BP-R1.0-M16		1	2	4	1.95	3	16	50	2	●
NM-2BP-R1.0-M20		1	2	4	1.95	3	20	60	2	●
NM-2BP-R1.5-M10		1.5	3	6	2.85	4.5	10	50	2	●
NM-2BP-R1.5-M20		1.5	3	6	2.85	4.5	20	60	2	●
NM-2BP-R2.0-M10		2	4	6	3.85	6	10	60	2	●
NM-2BP-R2.0-M16		2	4	6	3.85	6	16	60	2	●
NM-2BP-R2.0-M20		2	4	6	3.85	6	20	60	2	●
NM-2BP-R2.0-M25		2	4	6	3.85	6	25	60	2	●
NM-2BP-R2.5-M16		2.5	5	6	4.85	7.5	16	60	2	●
NM-2BP-R2.5-M25		2.5	5	6	4.85	7.5	25	70	2	●

- Ex stock   ○ On demand
- \* With internal cooling

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **General machining of Al and Al alloys**

**AL-2E**



- Factory standard
- Centre cutting
- Helix angle 55°

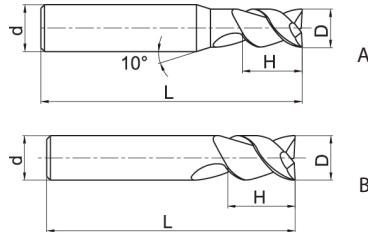

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			YK30F
AL-2E-D1.0		1	4	3	50	2	A	●
AL-2E-D1.5		1.5	4	4	50	2	A	●
AL-2E-D2.0		2	4	6	50	2	A	●
AL-2E-D2.5		2.5	4	7	50	2	A	●
AL-2E-D3.0		3	6	9	50	2	A	●
AL-2E-D4.0		4	6	12	50	2	A	●
AL-2E-D5.0		5	6	15	50	2	A	●
AL-2E-D6.0		6	6	18	60	2	B	●
AL-2E-D8.0		8	8	20	60	2	B	●
AL-2E-D10.0		10	10	30	75	2	B	●
AL-2E-D12.0		12	12	32	75	2	B	●
AL-2E-D16.0		16	16	45	100	2	B	●
AL-2E-D20.0		20	20	45	100	2	B	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## End mill long cutting edge General machining of Al and Al alloys

**AL-2EL**



- Factory standard
- Centre cutting
- Helix angle 55°

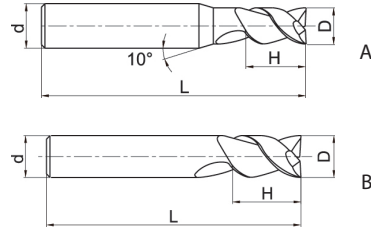

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			YK30F
AL-2EL-D3.0		3	6	12	60	2	A	●
AL-2EL-D4.0		4	6	16	60	2	A	●
AL-2EL-D5.0		5	6	20	60	2	A	●
AL-2EL-D6.0		6	6	25	75	2	B	●
AL-2EL-D8.0		8	8	32	75	2	B	●
AL-2EL-D10.0		10	10	45	100	2	B	●
AL-2EL-D12.0		12	12	45	100	2	B	●
AL-2EL-D16.0		16	16	65	150	2	B	●
AL-2EL-D20.0		20	20	75	150	2	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **General machining of Al and Al alloys**

**AL-3E**



- Factory standard
- Centre cutting
- Helix angle 45°

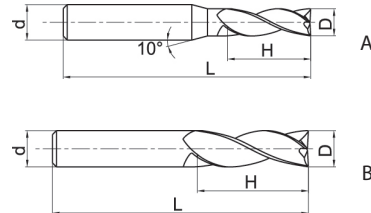

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			YK30F
AL-3E-D1.0		1	4	3	50	3	A	●
AL-3E-D1.5		1.5	4	4	50	3	A	●
AL-3E-D2.0		2	4	6	50	3	A	●
AL-3E-D2.5		2.5	4	7	50	3	A	●
AL-3E-D3.0		3	6	9	50	3	A	●
AL-3E-D4.0		4	6	12	50	3	A	●
AL-3E-D5.0		5	6	15	50	3	A	●
AL-3E-D6.0		6	6	18	60	3	B	●
AL-3E-D8.0		8	8	20	60	3	B	●
AL-3E-D10.0		10	10	30	75	3	B	●
AL-3E-D12.0		12	12	32	75	3	B	●
AL-3E-D16.0		16	16	45	100	3	B	●
AL-3E-D20.0		20	20	45	100	3	B	●

- Ex stock ○ On demand
- \* With internal cooling


Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable


**A**

## End mill long cutting edge General machining of Al and Al alloys

**AL-3EL**



- Factory standard
- Centre cutting
- Helix angle 45°

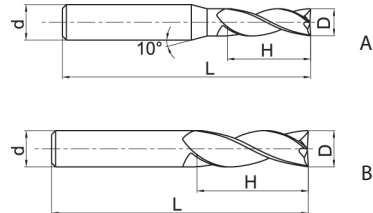

Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			YK30F
AL-3EL-D3.0		3	6	12	60	3	A	●
AL-3EL-D4.0		4	6	16	60	3	A	●
AL-3EL-D5.0		5	6	20	60	3	A	●
AL-3EL-D6.0		6	6	25	75	3	B	●
AL-3EL-D8.0		8	8	32	75	3	B	●
AL-3EL-D10.0		10	10	45	100	3	B	●
AL-3EL-D12.0		12	12	45	100	3	B	●
AL-3EL-D16.0		16	16	65	150	3	B	●
AL-3EL-D20.0		20	20	75	150	3	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**


Index

System code > B278


Cutting data > B492

Nonstandard order > B541

**End mill serrated teeth** **General machining of Al and Al alloys**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		YK30F
AL-3W-D6.0		6	6	16	50	3	●
AL-3W-D8.0		8	8	20	60	3	●
AL-3W-D10.0		10	10	25	75	3	●
AL-3W-D12.0		12	12	30	75	3	●
AL-3W-D16.0		16	16	45	100	3	●
AL-3W-D18.0		18	18	45	100	3	○
AL-3W-D20.0		20	20	45	100	3	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter High performance machining of non-ferrous metals

**5565R302NH**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		D	R	d (h6)	d <sub>1</sub>	H	M	L		YK40F
5565R302NH-0300		3	1.5	6	2.8	6	9	57	2	●
5565R302NH-0400		4	2	6	3.7	8	12	57	2	●
5565R302NH-0500		5	2.5	6	4.6	10	15	57	2	●
5565R302NH-0600		6	3	6	5.5	12	20	57	2	●
5565R302NH-0800		8	4	8	7.4	16	26	63	2	●
5565R302NH-1000		10	5	10	9.2	20	31	72	2	●
5565R302NH-1200		12	6	12	11	24	37	83	2	●
5565R302NH-1600		16	8	16	15	32	43	92	2	●

● Ex stock   ○ On demand

\* With internal cooling

Milling

**C**

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter long shank** High performance machining of non-ferrous metals

**5566R302NH**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade YK40F
		D	R	d (h6)	d <sub>1</sub>	H	M	L		
5566R302NH-0300		3	1.5	6	2.8	6	9	75	2	●
5566R302NH-0400		4	2	6	3.7	8	12	75	2	●
5566R302NH-0500		5	2.5	6	4.6	10	15	80	2	●
5566R302NH-0600		6	3	6	5.5	12	20	80	2	●
5566R302NH-0800		8	4	8	7.4	16	26	90	2	●
5566R302NH-1000		10	5	10	9.2	20	31	100	2	●
5566R302NH-1200		12	6	12	11	24	37	120	2	●
5566R302NH-1600		16	8	16	15	32	43	140	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







A

## Ball nose cutter General machining of Al and Al alloys

AL-2B



- Factory standard
- Centre cutting
- Helix angle 35°

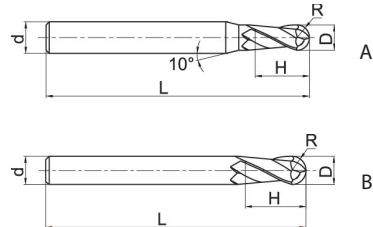

Turning

B

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		R	D	d (h6)	H	L			YK30F
AL-2B-R1.0		1	2	6	4	60	2	A	○
AL-2B-R1.5		1.5	3	6	6	60	2	A	○
AL-2B-R2.0		2	4	6	8	60	2	A	○
AL-2B-R2.5		2.5	5	6	10	60	2	A	○
AL-2B-R3.0		3	6	6	12	60	2	B	○
AL-2B-R4.0		4	8	8	16	75	2	B	○
AL-2B-R5.0		5	10	10	20	75	2	B	○
AL-2B-R6.0		6	12	12	24	75	2	B	○

● Ex stock ○ On demand

\* With internal cooling

C

Drilling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

D

Technical Information

E

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**Torus mill**

**General machining of Al and Al alloys**

**AL-2R-AIR**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade YK40F
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
AL-2R-D6.0R1.0-AIR		1	6	6	5.5	7	20	57	2	●
AL-2R-D8.0R1.0-AIR		1	8	8	7.4	9	26	63	2	●
AL-2R-D10.0R1.0-AIR		1	10	10	9.2	11	31	72	2	○
AL-2R-D10.0R2.0-AIR		2	10	10	9.2	11	31	72	2	○
AL-2R-D12.0R1.0-AIR		1	12	12	11	12	37	83	2	●
AL-2R-D12.0R2.0-AIR		2	12	12	11	12	37	83	2	○
AL-2R-D12.0R3.0-AIR		3	12	12	11	12	37	83	2	○
AL-2R-D16.0R1.0-AIR		1	16	16	15	16	43	92	2	○
AL-2R-D16.0R2.0-AIR		2	16	16	15	16	43	92	2	○
AL-2R-D16.0R3.0-AIR		3	16	16	15	16	43	92	2	○
AL-2R-D16.0R4.0-AIR		4	16	16	15	16	43	92	2	○
AL-2R-D20.0R1.0-AIR		1	20	20	19	20	53	104	2	●
AL-2R-D20.0R2.0-AIR		2	20	20	19	20	53	104	2	○
AL-2R-D20.0R3.0-AIR		3	20	20	19	20	53	104	2	○
AL-2R-D20.0R4.0-AIR		4	20	20	19	20	53	104	2	○
AL-2R-D20.0R5.0-AIR		5	20	20	19	20	53	104	2	●
AL-2R-D20.0R6.0-AIR		6	20	20	19	20	53	104	2	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Torus mill long shank General machining of Al and Al alloys

**AL-2RL-AIR**



- Factory standard
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		YK40F
AL-2RL-D6.0R1.0-AIR		1	6	6	5.5	7	43	80	2	●
AL-2RL-D8.0R1.0-AIR		1	8	8	7.4	9	53	90	2	●
AL-2RL-D10.0R1.0-AIR		1	10	10	9.2	11	59	100	2	●
AL-2RL-D10.0R2.0-AIR		2	10	10	9.2	11	59	100	2	●
AL-2RL-D12.0R1.0-AIR		1	12	12	11	12	74	120	2	●
AL-2RL-D12.0R2.0-AIR		2	12	12	11	12	74	120	2	●
AL-2RL-D12.0R3.0-AIR		3	12	12	11	12	74	120	2	●
AL-2RL-D16.0R1.0-AIR		1	16	16	15	16	84	140	2	●
AL-2RL-D16.0R2.0-AIR		2	16	16	15	16	84	140	2	●
AL-2RL-D16.0R3.0-AIR		3	16	16	15	16	84	140	2	●
AL-2RL-D16.0R4.0-AIR		4	16	16	15	16	84	140	2	●
AL-2RL-D20.0R1.0-AIR		1	20	20	19	20	89	140	2	○
AL-2RL-D20.0R2.0-AIR		2	20	20	19	20	89	140	2	●
AL-2RL-D20.0R3.0-AIR		3	20	20	19	20	89	140	2	●
AL-2RL-D20.0R4.0-AIR		4	20	20	19	20	89	140	2	●
AL-2RL-D20.0R5.0-AIR		5	20	20	19	20	89	140	2	○
AL-2RL-D20.0R6.0-AIR		6	20	20	19	20	89	140	2	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541


**Torus mill**

**General machining of Al and Al alloys**

**AL-3R-AIR**



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade YK40F
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
AL-3R-D12.0R1.0-AIR		1	12	12	11	12	37	83	3	●
AL-3R-D12.0R2.0-AIR		2	12	12	11	12	37	83	3	●
AL-3R-D12.0R3.0-AIR		3	12	12	11	12	37	83	3	●
AL-3R-D16.0R1.0-AIR		1	16	16	15	16	43	92	3	●
AL-3R-D16.0R2.0-AIR		2	16	16	15	16	43	92	3	●
AL-3R-D16.0R3.0-AIR		3	16	16	15	16	43	92	3	●
AL-3R-D16.0R4.0-AIR		4	16	16	15	16	43	92	3	●
AL-3R-D20.0R1.0-AIR		1	20	20	19	20	53	104	3	●
AL-3R-D20.0R2.0-AIR		2	20	20	19	20	53	104	3	○
AL-3R-D20.0R3.0-AIR		3	20	20	19	20	53	104	3	○
AL-3R-D20.0R4.0-AIR		4	20	20	19	20	53	104	3	○
AL-3R-D20.0R5.0-AIR		5	20	20	19	20	53	104	3	●
AL-3R-D20.0R6.0-AIR		6	20	20	19	20	53	104	3	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Torus mill long shank General machining of Al and Al alloys

**AL-3RL-AIR**



- Factory standard
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		YK40F
AL-3RL-D12.0R1.0-AIR	*	1	12	12	11	12	74	120	3	●
AL-3RL-D12.0R2.0-AIR		2	12	12	11	12	74	120	3	●
AL-3RL-D12.0R3.0-AIR		3	12	12	11	12	74	120	3	●
AL-3RL-D16.0R1.0-AIR		1	16	16	15	16	84	140	3	●
AL-3RL-D16.0R2.0-AIR		2	16	16	15	16	84	140	3	○
AL-3RL-D16.0R3.0-AIR		3	16	16	15	16	84	140	3	●
AL-3RL-D16.0R4.0-AIR		4	16	16	15	16	84	140	3	●
AL-3RL-D20.0R1.0-AIR		1	20	20	19	20	89	140	3	●
AL-3RL-D20.0R2.0-AIR		2	20	20	19	20	89	140	3	○
AL-3RL-D20.0R3.0-AIR		3	20	20	19	20	89	140	3	○
AL-3RL-D20.0R4.0-AIR		4	20	20	19	20	89	140	3	○
AL-3RL-D20.0R5.0-AIR		5	20	20	19	20	89	140	3	○
AL-3RL-D20.0R6.0-AIR		6	20	20	19	20	89	140	3	○

Milling

**C**

- Ex stock ○ On demand
- \* With internal cooling

Drilling

### Application field

P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


## End mill

### General machining of Al and Al alloys

#### ALG-2E



- Factory standard
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			YK40F
ALG-2E-D1.0		1	4	3	50	2	A	●
ALG-2E-D1.5		1.5	4	4	50	2	A	○
ALG-2E-D2.0		2	4	6	50	2	A	●
ALG-2E-D2.5		2.5	4	8	50	2	A	○
ALG-2E-D3.0S		3	4	8	50	2	A	●
ALG-2E-D3.5S		3.5	4	10	50	2	A	○
ALG-2E-D4.0S		4	4	11	50	2	B	○
ALG-2E-D3.0		3	6	8	50	2	A	●
ALG-2E-D3.5		3.5	6	10	50	2	A	○
ALG-2E-D4.0		4	6	11	50	2	A	●
ALG-2E-D4.5		4.5	6	11	50	2	A	○
ALG-2E-D5.0		5	6	13	50	2	A	●
ALG-2E-D5.5		5.5	6	16	50	2	A	○
ALG-2E-D6.0		6	6	16	50	2	B	●
ALG-2E-D7.0		7	8	20	60	2	A	○
ALG-2E-D8.0		8	8	20	60	2	B	●
ALG-2E-D9.0		9	10	22	75	2	A	○
ALG-2E-D10.0		10	10	25	75	2	B	●
ALG-2E-D11.0		11	12	26	75	2	A	○
ALG-2E-D12.0		12	12	30	75	2	B	●
ALG-2E-D14.0		14	14	32	75	2	B	●
ALG-2E-D16.0		16	16	45	100	2	B	●
ALG-2E-D18.0		18	18	45	100	2	B	○
ALG-2E-D20.0		20	20	45	100	2	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541




**A**



## End mill

### General machining of Al and Al alloys

#### ALG-3E



- Factory standard
- Centre cutting
- Helix angle 45°



Turning

**B**

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade	
		D	d (h6)	H	L			KMD401	YK40F
ALG-3E-D1.0		1	4	3	50	3	A	○	●
ALG-3E-D1.5		1.5	4	4	50	3	A	○	●
ALG-3E-D2.0		2	4	6	50	3	A	○	●
ALG-3E-D2.5		2.5	4	8	50	3	A	○	○
ALG-3E-D3.0S		3	4	8	50	3	A	○	●
ALG-3E-D3.5S		3.5	4	10	50	3	A	○	○
ALG-3E-D4.0S		4	4	11	50	3	B	○	●
ALG-3E-D3.0		3	6	8	50	3	A	●	●
ALG-3E-D3.5		3.5	6	10	50	3	A	●	○
ALG-3E-D4.0		4	6	11	50	3	A	●	●
ALG-3E-D4.5		4.5	6	11	50	3	A	●	○
ALG-3E-D5.0		5	6	13	50	3	A	●	●
ALG-3E-D5.5		5.5	6	16	50	3	A	●	○
ALG-3E-D6.0		6	6	16	50	3	B	●	●
ALG-3E-D7.0		7	8	20	60	3	A	●	○
ALG-3E-D8.0		8	8	20	60	3	B	●	●
ALG-3E-D9.0		9	10	22	75	3	A	●	○
ALG-3E-D10.0		10	10	25	75	3	B	●	●
ALG-3E-D11.0		11	12	26	75	3	A	●	○
ALG-3E-D12.0		12	12	30	75	3	B	●	●
ALG-3E-D14.0		14	14	32	75	3	B	●	●
ALG-3E-D16.0		16	16	45	100	3	B	●	●
ALG-3E-D18.0		18	18	45	100	3	B	●	○
ALG-3E-D20.0		20	20	45	100	3	B	○	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
			✓		

✓ Very suitable


✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541

**End mill**    **General machining of Al and Al alloys**



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 45°

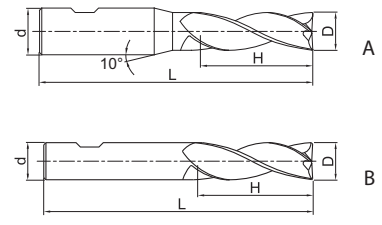

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMD401
ALG-3E-D3.0-W		3	6	8	50	3	A	●
ALG-3E-D3.5-W		3.5	6	10	50	3	A	●
ALG-3E-D4.0-W		4	6	11	50	3	A	●
ALG-3E-D4.5-W		4.5	6	11	50	3	A	●
ALG-3E-D5.0-W		5	6	13	50	3	A	●
ALG-3E-D5.5-W		5.5	6	16	50	3	A	●
ALG-3E-D6.0-W		6	6	16	50	3	B	●
ALG-3E-D7.0-W		7	8	20	60	3	A	●
ALG-3E-D8.0-W		8	8	20	60	3	B	●
ALG-3E-D9.0-W		9	10	22	75	3	A	●
ALG-3E-D10.0-W		10	10	25	75	3	B	●
ALG-3E-D11.0-W		11	12	26	75	3	A	●
ALG-3E-D12.0-W		12	12	30	75	3	B	●
ALG-3E-D14.0-W		14	14	32	75	3	B	●
ALG-3E-D16.0-W		16	16	45	100	3	B	●
ALG-3E-D18.0-W		18	18	45	100	3	B	●
ALG-3E-D20.0-W		20	20	45	100	3	B	●

- Ex stock    ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541




**A**  
Turning  
  
**B**  
Milling  
  
**C**  
Drilling  
  
**D**  
Technical Information  
  
**E**  
Index




**A**

## End mill High-performance machining of Al and Al alloys

**ALP-3E**



- Factory standard
- Centre cutting
- Helix angle 35°

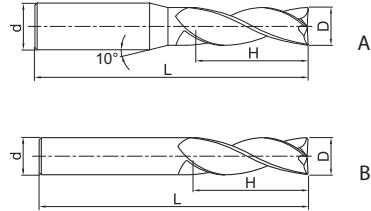

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

Article	*	Dimensions [mm]				Teeth	Geometry	Grade	
		D	d (h6)	H	L			KMD401	YK40F
ALP-3E-D1.0		1	4	3	50	3	A	○	○
ALP-3E-D1.5		1.5	4	4	50	3	A	○	●
ALP-3E-D2.0		2	4	6	50	3	A	○	●
ALP-3E-D2.5		2.5	4	8	50	3	A	○	○
ALP-3E-D3.0S		3	4	8	50	3	A	○	●
ALP-3E-D4.0S		4	4	11	50	3	B	○	●
ALP-3E-D3.0		3	6	8	50	3	A	●	●
ALP-3E-D4.0		4	6	11	50	3	A	●	●
ALP-3E-D4.5		4.5	6	11	50	3	A	●	○
ALP-3E-D5.0		5	6	13	50	3	A	●	●
ALP-3E-D5.5		5.5	6	16	50	3	A	●	○
ALP-3E-D6.0		6	6	16	50	3	B	●	●
ALP-3E-D7.0		7	8	20	60	3	B	●	○
ALP-3E-D8.0		8	8	20	60	3	B	●	●
ALP-3E-D9.0		9	10	22	75	3	B	●	○
ALP-3E-D10.0		10	10	25	75	3	B	●	●
ALP-3E-D11.0		11	12	26	75	3	B	●	●
ALP-3E-D12.0		12	12	30	75	3	B	●	●
ALP-3E-D14.0		14	14	32	75	3	B	●	●
ALP-3E-D16.0		16	16	45	100	3	B	●	●
ALP-3E-D20.0		20	20	45	100	3	B	●	○

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541



## End mill

### High-performance machining of Al and Al alloys

#### ALP-3E-W



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMD401
ALP-3E-D3.0-W		3	6	8	50	3	A	●
ALP-3E-D4.0-W		4	6	11	50	3	A	●
ALP-3E-D4.5-W		4.5	6	11	50	3	A	●
ALP-3E-D5.0-W		5	6	13	50	3	A	●
ALP-3E-D5.5-W		5.5	6	16	50	3	A	●
ALP-3E-D6.0-W		6	6	16	50	3	B	●
ALP-3E-D7.0-W		7	8	20	60	3	B	●
ALP-3E-D8.0-W		8	8	20	60	3	B	●
ALP-3E-D9.0-W		9	10	22	75	3	B	●
ALP-3E-D10.0-W		10	10	25	75	3	B	●
ALP-3E-D11.0-W		11	12	26	75	3	B	●
ALP-3E-D12.0-W		12	12	30	75	3	B	●
ALP-3E-D14.0-W		14	14	32	75	3	B	●
ALP-3E-D16.0-W		16	16	45	100	3	B	●
ALP-3E-D20.0-W		20	20	45	100	3	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

- ✓ Very suitable
- ✓ Suitable

System code > B278      Cutting data > B492      Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index

A


## End mill High-performance machining of Al and Al alloys

ALP-4E



- Factory standard
- Centre cutting
- Helix angle 38°

Turning

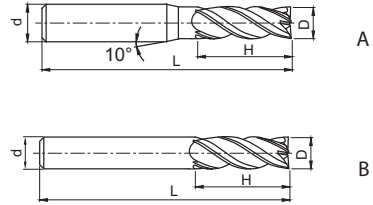

B

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade	
		D	d (h6)	H	L			KMD401	YK40F
ALP-4E-D3.0S	*	3	4	9	50	4	A	○	●
ALP-4E-D4.0S	*	4	4	11	50	4	B	○	●
ALP-4E-D3.0		3	6	9	50	4	A	●	●
ALP-4E-D4.0		4	6	11	50	4	A	●	●
ALP-4E-D5.0		5	6	13	50	4	A	●	●
ALP-4E-D6.0		6	6	16	50	4	B	●	●
ALP-4E-D8.0		8	8	20	60	4	B	●	●
ALP-4E-D10.0		10	10	25	75	4	B	●	●
ALP-4E-D12.0		12	12	30	75	4	B	●	●
ALP-4E-D16.0		16	16	45	100	4	B	●	●
ALP-4E-D18.0		18	18	45	100	4	B	●	○
ALP-4E-D20.0		20	20	45	100	4	B	●	●

● Ex stock ○ On demand

\* With internal cooling

C

Drilling

D

Technical Information

### Application field

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

E

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


## End mill

### High-performance machining of Al and Al alloys

#### ALP-4E-W



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 38°

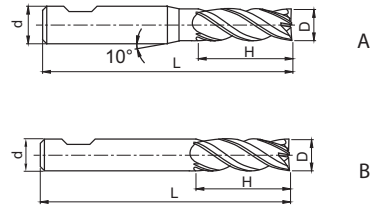

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMD401
ALP-4E-D3.0-W		3	6	9	50	4	A	●
ALP-4E-D4.0-W		4	6	11	50	4	A	●
ALP-4E-D5.0-W		5	6	13	50	4	A	●
ALP-4E-D6.0-W		6	6	16	50	4	B	●
ALP-4E-D8.0-W		8	8	20	60	4	B	●
ALP-4E-D10.0-W		10	10	25	75	4	B	●
ALP-4E-D12.0-W		12	12	30	75	4	B	●
ALP-4E-D16.0-W		16	16	45	100	4	B	●
ALP-4E-D18.0-W		18	18	45	100	4	B	●
ALP-4E-D20.0-W		20	20	45	100	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492

Nonstandard order > B541



# Solid carbide milling ALG/ALP series

A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


## Torus mill

### General machining of Al and Al alloys

#### ALG-2R



- Straight shank
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade	
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMD401	YK40F
ALG-2R-D6.0R0.3		0.3	6	6	5,7	8	16	75	2	●	●
ALG-2R-D6.0R0.5		0.5	6	6	5,7	8	16	75	2	●	●
ALG-2R-D6.0R1.0		1	6	6	5,7	8	16	75	2	●	●
ALG-2R-D8.0R0.3		0.3	8	8	7,4	10	20	75	2	●	●
ALG-2R-D8.0R0.5		0.5	8	8	7,4	10	20	75	2	●	●
ALG-2R-D8.0R1.0		1	8	8	7,4	10	20	75	2	●	●
ALG-2R-D10.0R0.5		0.5	10	10	9,4	12	35	100	2	●	●
ALG-2R-D10.0R1.0		1	10	10	9,4	12	35	100	2	●	●
ALG-2R-D10.0R1.6		1.6	10	10	9,4	12	35	100	2	●	●
ALG-2R-D10.0R2.5		2.5	10	10	9,4	12	35	100	2	●	●
ALG-2R-D12.0R0.5		0.5	12	12	11,4	15	35	100	2	●	●
ALG-2R-D12.0R1.0		1	12	12	11,4	15	35	100	2	●	●
ALG-2R-D12.0R1.6		1.6	12	12	11,4	15	35	100	2	●	●
ALG-2R-D12.0R2.5		2.5	12	12	11,4	15	35	100	2	●	●
ALG-2R-D12.0R3.2		3.2	12	12	11,4	15	35	100	2	●	●
ALG-2R-D12.0R4.0		4	12	12	11,4	15	35	100	2	●	●
ALG-2R-D16.0R1.0		1	16	16	15,4	15	45	125	2	●	●
ALG-2R-D16.0R1.6		1.6	16	16	15,4	15	45	125	2	●	●
ALG-2R-D16.0R2.5		2.5	16	16	15,4	15	45	125	2	●	●
ALG-2R-D16.0R3.2		3.2	16	16	15,4	15	45	125	2	●	●
ALG-2R-D16.0R4.0		4	16	16	15,4	15	45	125	2	●	●
ALG-2R-D16.0R6.3		6.3	16	16	15,4	15	45	125	2	○	○
ALG-2R-D20.0R1.0		1	20	20	18	20	50	125	2	●	●
ALG-2R-D20.0R1.6		1.6	20	20	18	20	50	125	2	●	●
ALG-2R-D20.0R2.5		2.5	20	20	18	20	50	125	2	●	●
ALG-2R-D20.0R3.2		3.2	20	20	18	20	50	125	2	●	●
ALG-2R-D20.0R4.0		4	20	20	18	20	50	125	2	●	●
ALG-2R-D20.0R6.3		6.3	20	20	18	20	50	125	2	○	○
ALG-2R-D25.0R6.3		6.3	25	25	23	25	75	150	2	○	○

● Ex stock ○ On demand

\* With internal cooling

#### Application field

P	M	K	N	S	H
			✓		


✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492

Nonstandard order > B541

**Torus mill**
**General machining of Al and Al alloys**
**ALG-2R-W**


- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]							Teeth	Grade KMD401
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
ALG-2R-D6.0R0.3-W		0.3	6	6	5,7	8	16	75	2	●
ALG-2R-D6.0R0.5-W		0.5	6	6	5,7	8	16	75	2	●
ALG-2R-D6.0R1.0-W		1	6	6	5,7	8	16	75	2	●
ALG-2R-D8.0R0.3-W		0.3	8	8	7,4	10	20	75	2	●
ALG-2R-D8.0R0.5-W		0.5	8	8	7,4	10	20	75	2	●
ALG-2R-D8.0R1.0-W		1	8	8	7,4	10	20	75	2	●
ALG-2R-D10.0R0.5-W		0.5	10	10	9,4	12	35	100	2	●
ALG-2R-D10.0R1.0-W		1	10	10	9,4	12	35	100	2	●
ALG-2R-D10.0R1.6-W		1.6	10	10	9,4	12	35	100	2	●
ALG-2R-D10.0R2.5-W		2.5	10	10	9,4	12	35	100	2	●
ALG-2R-D12.0R0.5-W		0.5	12	12	11,4	15	35	100	2	●
ALG-2R-D12.0R1.0-W		1	12	12	11,4	15	35	100	2	●
ALG-2R-D12.0R1.6-W		1.6	12	12	11,4	15	35	100	2	●
ALG-2R-D12.0R2.5-W		2.5	12	12	11,4	15	35	100	2	●
ALG-2R-D12.0R3.2-W		3.2	12	12	11,4	15	35	100	2	●
ALG-2R-D12.0R4.0-W		4	12	12	11,4	15	35	100	2	●
ALG-2R-D16.0R1.0-W		1	16	16	15,4	15	45	125	2	●
ALG-2R-D16.0R1.6-W		1.6	16	16	15,4	15	45	125	2	●
ALG-2R-D16.0R2.5-W		2.5	16	16	15,4	15	45	125	2	●
ALG-2R-D16.0R3.2-W		3.2	16	16	15,4	15	45	125	2	●
ALG-2R-D16.0R4.0-W		4	16	16	15,4	15	45	125	2	●
ALG-2R-D16.0R6.3-W		6.3	16	16	15,4	15	45	125	2	○
ALG-2R-D20.0R1.0-W		1	20	20	18	20	50	125	2	●
ALG-2R-D20.0R1.6-W		1.6	20	20	18	20	50	125	2	●
ALG-2R-D20.0R2.5-W		2.5	20	20	18	20	50	125	2	●
ALG-2R-D20.0R3.2-W		3.2	20	20	18	20	50	125	2	●
ALG-2R-D20.0R4.0-W		4	20	20	18	20	50	125	2	●
ALG-2R-D20.0R6.3-W		6.3	20	20	18	20	50	125	2	○
ALG-2R-D25.0R6.3-W		6.3	25	25	23	25	75	150	2	○

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
			✓		

✓ Very suitable

✓ Suitable

System code &gt; B278

Cutting data &gt; B492

Nonstandard order &gt; B541



## Notes

**A**

Turning

**B**

Milling

**C**

Drilling


**D**

Technical  
Information


**E**

Index

**Ball nose cutter** **High-performance machining**



- Factory standard
- Centre cutting
- Helix angle 38°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-4B-R3.0		3	6	6	9	50	4	●
TM-4B-R4.0		4	8	8	12	60	4	●
TM-4B-R5.0		5	10	10	15	75	4	●
TM-4B-R6.0		6	12	12	18	75	4	●
TM-4B-R8.0		8	16	16	24	85	4	●
TM-4B-R10.0		10	20	20	30	100	4	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## Ball nose cutter High-performance machining

**TM-4BL**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 38°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-4BL-R3.0		3	6	6	16	57	4	●
TM-4BL-R4.0		4	8	8	20	63	4	●
TM-4BL-R5.0		5	10	10	22	72	4	●
TM-4BL-R6.0		6	12	12	25	83	4	●
TM-4BL-R8.0		8	16	16	32	92	4	●
TM-4BL-R10.0		10	20	20	38	104	4	●

- Ex stock   ○ On demand
- \* With internal cooling

Milling

**C**

Application field						
P	M	K	N	S	H	
	✓			✓		✓ Very suitable ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **High-performance machining**

**TM-4BP**



- Factory standard
- Centre cutting
- Helix angle 38°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMS405
TM-4BP-R3.0		3	6	6	5.5	9	18	60	4	●
TM-4BP-R4.0		4	8	8	7.4	12	24	75	4	●
TM-4BP-R5.0		5	10	10	9.4	15	30	75	4	●
TM-4BP-R6.0		6	12	12	11.4	18	35	90	4	●
TM-4BP-R8.0		8	16	16	15.4	24	40	90	4	●
TM-4BP-R10.0		10	20	20	19.4	35	50	110	4	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter High-performance machining

**TM-5B**



- Factory standard
- Helix angle 38°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-5B-R3.0		3	6	6	9	50	5	●
TM-5B-R4.0		4	8	8	12	60	5	●
TM-5B-R5.0		5	10	10	15	75	5	●
TM-5B-R6.0		6	12	12	18	75	5	●
TM-5B-R8.0		8	16	16	24	85	5	●
TM-5B-R10.0		10	20	20	35	100	5	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**


Index

System code > B278


Cutting data > B492

Nonstandard order > B541

**Ball nose cutter** **High-performance machining**



- Type of shank DIN 6535HA
- Helix angle 38°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-5BL-R3.0		3	6	6	16	57	5	●
TM-5BL-R4.0		4	8	8	20	63	5	●
TM-5BL-R5.0		5	10	10	22	72	5	●
TM-5BL-R6.0		6	12	12	25	83	5	●
TM-5BL-R8.0		8	16	16	32	92	5	●
TM-5BL-R10.0		10	20	20	38	104	5	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

✓ Very suitable  
 ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter High-performance machining

**TM-5BP**



- Factory standard
- Helix angle 38°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMS405
TM-5BP-R3.0		3	6	6	5.5	9	18	60	5	●
TM-5BP-R4.0		4	8	8	7.4	12	24	75	5	●
TM-5BP-R5.0		5	10	10	9.4	15	30	75	5	●
TM-5BP-R6.0		6	12	12	11.4	18	35	90	5	●
TM-5BP-R8.0		8	16	16	15.4	24	40	90	5	●
TM-5BP-R10.0		10	20	20	19.4	35	50	110	5	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**


Index

System code > B278

Cutting data > B492


Nonstandard order > B541

Torus mill **High-performance machining**



TM-4R

- Factory standard
- Centre cutting
- Helix angle 38°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-4R-D6R0.5		0.5	6	6	16	50	4	●
TM-4R-D6R0.3		0.3	6	6	16	50	4	●
TM-4R-D6R1.0		1	6	6	16	50	4	●
TM-4R-D6R 0.75		0.75	6	6	16	50	4	○
TM-4R-D8R0.5		0.5	8	8	20	60	4	●
TM-4R-D8R0.3		0.3	8	8	20	60	4	●
TM-4R-D8R1.0		1	8	8	20	60	4	●
TM-4R-D8R0.75		0.75	8	8	20	60	4	○
TM-4R-D10R0.75		0.75	10	10	25	75	4	○
TM-4R-D10R1.6		1.6	10	10	25	75	4	●
TM-4R-D10R2.0		2	10	10	25	75	4	●
TM-4R-D10R0.5		0.5	10	10	25	75	4	●
TM-4R-D10R2.5		2.5	10	10	25	75	4	○
TM-4R-D10R1.0		1	10	10	25	75	4	●
TM-4R-D10R3.0		3	10	10	25	75	4	●
TM-4R-D10R1.25		1.25	10	10	25	75	4	○
TM-4R-D10R1.5		1.5	10	10	25	75	4	●
TM-4R-D12R1.5		1.5	12	12	30	75	4	●
TM-4R-D12R0.5		0.5	12	12	30	75	4	●
TM-4R-D12R1.0		1	12	12	30	75	4	●
TM-4R-D12R4.0		4	12	12	30	75	4	●
TM-4R-D12R1.6		1.6	12	12	30	75	4	●
TM-4R-D12R2.5		2.5	12	12	30	75	4	●
TM-4R-D12R1.25		1.25	12	12	30	75	4	○
TM-4R-D12R0.75		0.75	12	12	30	75	4	○
TM-4R-D12R3.0		3	12	12	30	75	4	●
TM-4R-D12R3.2		3.2	12	12	30	75	4	●
TM-4R-D12R2.0		2	12	12	30	75	4	●
TM-4R-D16R1.25		1.25	16	16	35	90	4	●
TM-4R-D16R4.0		4	16	16	35	90	4	●
TM-4R-D16R1.0		1	16	16	35	90	4	●
TM-4R-D16R3.0		3	16	16	35	90	4	●
TM-4R-D16R2.0		2	16	16	35	90	4	●
TM-4R-D16R6.3		6.3	16	16	35	90	4	○
TM-4R-D16R5.0		5	16	16	35	90	4	●
TM-4R-D16R1.5		1.5	16	16	35	90	4	●
TM-4R-D16R2.5		2.5	16	16	35	90	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541





## Torus mill

## High-performance machining

### TM-4R



- Factory standard
- Centre cutting
- Helix angle 38°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-4R-D16R1.6		1.6	16	16	35	90	4	●
TM-4R-D16R3.2		3.2	16	16	35	90	4	●
TM-4R-D20R1.5		1.5	20	20	45	100	4	●
TM-4R-D20R2.0		2	20	20	45	100	4	●
TM-4R-D20R2.5		2.5	20	20	45	100	4	●
TM-4R-D20R1.0		1	20	20	45	100	4	●
TM-4R-D20R4.0		4	20	20	45	100	4	●
TM-4R-D20R1.6		1.6	20	20	45	100	4	●
TM-4R-D20R5.0		5	20	20	45	100	4	●
TM-4R-D20R3.0		3	20	20	45	100	4	●
TM-4R-D20R3.2		3.2	20	20	45	100	4	●
TM-4R-D20R6.3		6.3	20	20	45	100	4	●
TM-4R-D20R1.25		1.25	21	20	45	100	4	●
TM-4R-D25R1.0		1	25	25	50	110	4	●
TM-4R-D25R3.0		3	25	25	50	110	4	●
TM-4R-D25R2.0		2	25	25	50	110	4	●
TM-4R-D25R2.5		2.5	25	25	50	110	4	○
TM-4R-D25R4.0		4	25	25	50	110	4	●
TM-4R-D25R3.2		3.2	25	25	50	110	4	●
TM-4R-D25R1.5		1.5	25	25	50	110	4	●
TM-4R-D25R5.0		5	25	25	50	110	4	●
TM-4R-D25R6.3		6.3	25	25	50	110	4	●
TM-4R-D25R1.6		1.6	25	25	50	110	4	●
TM-4R-D25R1.25		1.25	25	25	50	110	4	○

● Ex stock ○ On demand

\* With internal cooling

### Application field

P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541


## Torus mill

## High-performance machining

### TM-4RP



- Factory standard
- Centre cutting
- Helix angle 38°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMS405
TM-4RP-D8R0.75		0.75	8	8	7.4	16	25	75	4	○
TM-4RP-D8R1.0		1	8	8	7.4	16	25	75	4	●
TM-4RP-D8R0.3		0.3	8	8	7.4	16	25	75	4	●
TM-4RP-D8R0.5		0.5	8	8	7.4	16	25	75	4	●
TM-4RP-D10R2.0		2	10	10	9.4	20	32	75	4	●
TM-4RP-D10R1.6		1.6	10	10	9.4	20	32	75	4	●
TM-4RP-D10R1.5		1.5	10	10	9.4	20	32	75	4	●
TM-4RP-D10R1.25		1.25	10	10	9.4	20	32	75	4	●
TM-4RP-D10R3.0		3	10	10	9.4	20	32	75	4	●
TM-4RP-D10R0.5		0.5	10	10	9.4	20	32	75	4	●
TM-4RP-D10R0.75		0.75	10	10	9.4	20	32	75	4	○
TM-4RP-D10R2.5		2.5	10	10	9.4	20	32	75	4	○
TM-4RP-D10R1.0		1	10	10	9.4	20	32	75	4	●
TM-4RP-D12R1.25		1.25	12	12	11.4	24	40	90	4	●
TM-4RP-D12R1.0		1	12	12	11.4	24	40	90	4	●
TM-4RP-D12R2.0		2	12	12	11.4	24	40	90	4	●
TM-4RP-D12R0.5		0.5	12	12	11.4	24	40	90	4	●
TM-4RP-D12R3.0		3	12	12	11.4	24	40	90	4	●
TM-4RP-D12R4.0		4	12	12	11.4	24	40	90	4	●
TM-4RP-D12R3.2		3.2	12	12	11.4	24	40	90	4	●
TM-4RP-D12R1.5		1.5	12	12	11.4	24	40	90	4	●
TM-4RP-D12R2.5		2.5	12	12	11.4	24	40	90	4	○
TM-4RP-D12R0.75		0.75	12	12	11.4	24	40	90	4	○
TM-4RP-D12R1.6		1.6	12	12	11.4	24	40	90	4	●
TM-4RP-D16R6.3		6.3	16	16	15	32	50	100	4	○
TM-4RP-D16R4.0		4	16	16	15	32	50	100	4	●
TM-4RP-D16R5.0		5	16	16	15	32	50	100	4	●
TM-4RP-D16R3.2		3.2	16	16	15	32	50	100	4	●
TM-4RP-D16R1.25		1.25	16	16	15	32	50	100	4	●
TM-4RP-D16R2.5		2.5	16	16	15	32	50	100	4	○
TM-4RP-D16R1.0		1	16	16	15	32	50	100	4	●
TM-4RP-D16R3.0		3	16	16	14	32	50	100	4	●
TM-4RP-D16R1.6		1.6	16	16	15	32	50	100	4	●
TM-4RP-D16R1.5		1.5	16	16	15	32	50	100	4	●
TM-4RP-D16R2.0		2	16	16	15	32	50	100	4	●
TM-4RP-D20R1.6		1.6	20	20	19	35	60	110	4	●
TM-4RP-D20R4.0		4	20	20	19	35	60	110	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index




**A**

## Torus mill High-performance machining

### TM-4RP



- Factory standard
- Centre cutting
- Helix angle 38°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade KMS405
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
TM-4RP-D20R1.0		1	20	20	19	35	60	110	4	●
TM-4RP-D20R1.5		1.5	20	20	19	35	60	110	4	●
TM-4RP-D20R1.25		1.25	20	20	19	35	60	110	4	●
TM-4RP-D20R2.5		2.5	20	20	19	35	60	110	4	○
TM-4RP-D20R2.0		2	20	20	19	35	60	110	4	●
TM-4RP-D20R3.0		3	20	20	19	35	60	110	4	●
TM-4RP-D20R5.0		5	20	20	19	35	60	110	4	●
TM-4RP-D20R6.3		6.3	20	20	19	35	60	110	4	●
TM-4RP-D20R3.2		3.2	20	20	19	35	60	110	4	●
TM-4RP-D25R3.0		3	25	25	24	45	75	150	4	●
TM-4RP-D25R6.3		6.3	25	25	24	45	75	150	4	●
TM-4RP-D25R2.5		2.5	25	25	24	45	75	150	4	●
TM-4RP-D25R4.0		4	25	25	24	45	75	150	4	●
TM-4RP-D25R3.2		3.2	25	25	24	45	75	150	4	●
TM-4RP-D25R1.5		1.5	25	25	24	45	75	150	4	●
TM-4RP-D25R2.0		2	25	25	24	45	75	150	4	●
TM-4RP-D25R1.25		1.25	25	25	24	45	75	150	4	○
TM-4RP-D25R5.0		5	25	25	24	45	75	150	4	●
TM-4RP-D25R1.0		1	25	25	24	45	75	150	4	●
TM-4RP-D25R1.6		1.6	25	25	24	45	75	150	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Drilling

**D**

Technical Information

#### Application field

P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Torus mill** **High-performance machining**

**TM-5R**



- Factory standard
- Helix angle 42°



Article	*	Dimensions [mm]					Teeth	Grade KMS405
		R	D	d (h6)	H	L		
TM-5R-D6R1.0		1	6	6	16	50	5	●
TM-5R-D6R0.5		0.5	6	6	16	50	5	●
TM-5R-D6R0.3		0.3	6	6	16	50	5	●
TM-5R-D6R0.75		0.75	6	6	16	50	5	○
TM-5R-D8R0.5		0.5	8	8	20	60	5	●
TM-5R-D8R0.3		0.3	8	8	20	60	5	●
TM-5R-D8R0.75		0.75	8	8	20	60	5	○
TM-5R-D8R1.0		1	8	8	20	60	5	●
TM-5R-D10R3.0		3	10	10	25	75	5	●
TM-5R-D10R1.6		1.6	10	10	25	75	5	●
TM-5R-D10R2.5		2.5	10	10	25	75	5	○
TM-5R-D10R1.5		1.5	10	10	25	75	5	●
TM-5R-D10R2.0		2	10	10	25	75	5	●
TM-5R-D10R0.75		0.75	10	10	25	75	5	○
TM-5R-D10R1.0		1	10	10	25	75	5	●
TM-5R-D10R1.25		1.25	10	10	25	75	5	○
TM-5R-D10R0.5		0.5	10	10	25	75	5	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index

# Solid carbide milling TM series


A

## Torus mill High-performance machining

TM-7R



- Factory standard
- Helix angle 41°



Turning

B

Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-7R-D12R2.0		2	12	12	30	75	7	●
TM-7R-D12R1.5		1.5	12	12	30	75	7	●
TM-7R-D12R1.0		1	12	12	30	75	7	●
TM-7R-D12R3.2		3.2	12	12	30	75	7	●
TM-7R-D12R1.6		1.6	12	12	30	75	7	●
TM-7R-D12R3.0		3	12	12	30	75	7	●
TM-7R-D12R0.75		0.75	12	12	30	75	7	○
TM-7R-D12R2.5		2.5	12	12	30	75	7	●
TM-7R-D12R4.0		4	12	12	30	75	7	●
TM-7R-D12R0.5		0.5	12	12	30	75	7	●
TM-7R-D12R1.25		1.25	12	12	30	75	7	○
TM-7R-D16R1.25		1.25	16	16	35	90	7	○
TM-7R-D16R5.0		5	16	16	35	90	7	●
TM-7R-D16R6.3		6.3	16	16	35	90	7	○
TM-7R-D16R1.0		1	16	16	35	90	7	●
TM-7R-D16R3.0		3	16	16	35	90	7	●
TM-7R-D16R2.0		2	16	16	35	90	7	●
TM-7R-D16R2.5		2.5	16	16	35	90	7	●
TM-7R-D16R3.2		3.2	16	16	35	90	7	●
TM-7R-D16R1.5		1.5	16	16	35	90	7	●
TM-7R-D16R1.6		1.6	16	16	35	90	7	●
TM-7R-D16R4.0		4	16	16	35	90	7	●
TM-7R-D20R4.0		4	20	20	45	100	7	●
TM-7R-D20R6.3		6.3	20	20	45	100	7	●
TM-7R-D20R1.5		1.5	20	20	45	100	7	●
TM-7R-D20R3.0		3	20	20	45	100	7	●
TM-7R-D20R5.0		5	20	20	45	100	7	●
TM-7R-D20R2.0		2	20	20	45	100	7	●
TM-7R-D20R1.6		1.6	20	20	45	100	7	●
TM-7R-D20R3.2		3.2	20	20	45	100	7	●
TM-7R-D20R2.5		2.5	20	20	45	100	7	●
TM-7R-D20R1.0		1	20	20	45	100	7	●
TM-7R-D20R1.25		1.25	21	20	45	100	7	○

Milling

C

Drilling

D

Technical Information

- Ex stock ○ On demand
- \* With internal cooling

E

Index

### Application field

P	M	K	N	S	H
	✓			✓	


- ✓ Very suitable
- ✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541

**Torus mill** **High-performance machining**



- Factory standard
- Helix angle 38°



Article	*	Dimensions [mm]					Teeth	Grade
		R	D	d (h6)	H	L		KMS405
TM-9R-D25R2.0		2	25	25	50	110	9	●
TM-9R-D25R3.2		3.2	25	25	50	110	9	●
TM-9R-D25R1.6		1.6	25	25	50	110	9	●
TM-9R-D25R5.0		5	25	25	50	110	9	●
TM-9R-D25R1.25		1.25	25	25	50	110	9	○
TM-9R-D25R1.0		1	25	25	50	110	9	●
TM-9R-D25R1.5		1.5	25	25	50	110	9	●
TM-9R-D25R3.0		3	25	25	50	110	9	●
TM-9R-D25R6.3		6.3	25	25	50	110	9	●
TM-9R-D25R4.0		4	25	25	50	110	9	●
TM-9R-D25R2.5		2.5	25	25	50	110	9	○

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541





**A**

## Torus mill High-performance machining

**TM-5RP**



- Factory standard
- Helix angle 42°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
TM-5RP-D8R0.5		0.5	8	8	7.4	16	25	75	5	●
TM-5RP-D8R1.0		1	8	8	7.4	16	25	75	5	●
TM-5RP-D8R0.3		0.3	8	8	7.4	16	25	75	5	●
TM-5RP-D8R0.75		0.75	8	8	7.4	16	25	75	5	○
TM-5RP-D10R1.6		1.6	10	10	9.4	20	32	75	5	●
TM-5RP-D10R1.5		1.5	10	10	9.4	20	32	75	5	●
TM-5RP-D10R3.0		3	10	10	9.4	20	32	75	5	●
TM-5RP-D10R0.5		0.5	10	10	9.4	20	32	75	5	●
TM-5RP-D10R1.25		1.25	10	10	9.4	20	32	75	5	○
TM-5RP-D10R2.0		2	10	10	9.4	20	32	75	5	●
TM-5RP-D10R1.0		1	10	10	9.4	20	32	75	5	●
TM-5RP-D10R0.75		0.75	10	10	9.4	20	32	75	5	○
TM-5RP-D10R2.5		2.5	10	10	9.4	20	32	75	5	●

Milling

**C**

- Ex stock ○ On demand
- \* With internal cooling

Drilling

Application field						
P	M	K	N	S	H	
	✓			✓		✓ Very suitable
						✓ Suitable

**D**

Technical Information

**E**


Index

System code > B278

Cutting data > B492


Nonstandard order > B541

**Torus mill** **High-performance machining**



**TM-7RP**

- Factory standard
- Helix angle 41°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
TM-7RP-D12R1.6		1.6	12	12	11.4	24	40	90	7	●
TM-7RP-D12R1.5		1.5	12	12	11.4	24	40	90	7	●
TM-7RP-D12R2.0		2	12	12	11.4	24	40	90	7	●
TM-7RP-D12R2.5		2.5	12	12	11.4	24	40	90	7	●
TM-7RP-D12R4.0		4	12	12	11.4	24	40	90	7	●
TM-7RP-D12R0.5		0.5	12	12	11.4	24	40	90	7	●
TM-7RP-D12R1.0		1	12	12	11.4	24	40	90	7	●
TM-7RP-D12R3.0		3	12	12	11.4	24	40	90	7	●
TM-7RP-D12R0.75		0.75	12	12	11.4	24	40	90	7	○
TM-7RP-D12R3.2		3.2	12	12	11.4	24	40	90	7	●
TM-7RP-D12R1.25		1.25	12	12	11.4	24	40	90	7	○
TM-7RP-D16R2.0		2	16	16	15	32	50	100	7	●
TM-7RP-D16R3.2		3.2	16	16	15	32	50	100	7	●
TM-7RP-D16R1.5		1.5	16	16	15	32	50	100	7	●
TM-7RP-D16R1.6		1.6	16	16	15	32	50	100	7	●
TM-7RP-D16R4.0		4	16	16	15	32	50	100	7	●
TM-7RP-D16R3.0		3	16	16	15	32	50	100	7	●
TM-7RP-D16R1.0		1	16	16	15	32	50	100	7	●
TM-7RP-D16R5.0		5	16	16	15	32	50	100	7	●
TM-7RP-D16R6.3		6.3	16	16	15	32	50	100	7	○
TM-7RP-D16R1.25		1.25	16	16	15	32	50	100	7	○
TM-7RP-D16R2.5		2.5	16	16	15	32	50	100	7	●
TM-7RP-D20R3.0		3	20	20	19	35	60	110	7	●
TM-7RP-D20R1.5		1.5	20	20	19	35	60	110	7	●
TM-7RP-D20R6.3		6.3	20	20	19	35	60	110	7	●
TM-7RP-D20R2.5		2.5	20	20	19	35	60	110	7	●
TM-7RP-D20R5.0		5	20	20	19	35	60	110	7	●
TM-7RP-D20R1.25		1.25	20	20	19	35	60	110	7	○
TM-7RP-D20R1.0		1	20	20	19	35	60	110	7	●
TM-7RP-D20R3.2		3.2	20	20	19	35	60	110	7	●
TM-7RP-D20R1.6		1.6	20	20	19	35	60	110	7	●
TM-7RP-D20R2.0		2	20	20	19	35	60	110	7	●
TM-7RP-D20R4.0		4	20	20	19	35	60	110	7	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## Torus mill High-performance machining

**TM-9RP**



- Factory standard
- Helix angle 38°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
TM-9RP-D25R3.0		3	25	25	24	45	75	150	9	●
TM-9RP-D25R3.2		3.2	25	25	24	45	75	150	9	●
TM-9RP-D25R6.3		6.3	25	25	24	45	75	150	9	●
TM-9RP-D25R1.0		1	25	25	24	45	75	150	9	●
TM-9RP-D25R1.6		1.6	25	25	24	45	75	150	9	●
TM-9RP-D25R1.5		1.5	25	25	24	45	75	150	9	●
TM-9RP-D25R2.0		2	25	25	24	45	75	150	9	●
TM-9RP-D25R4.0		4	25	25	24	45	75	150	9	●
TM-9RP-D25R5.0		5	25	25	24	45	75	150	9	●
TM-9RP-D25R1.25		1.25	25	25	24	45	75	150	9	○
TM-9RP-D25R2.5		2.5	25	25	24	45	75	150	9	●

Milling

**C**

- Ex stock ○ On demand
- \* With internal cooling

Drilling

Application field						
P	M	K	N	S	H	
	✓			✓		✓ Very suitable ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **HSC/HPC machining**

**5501R38414GM**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
5501R38414GM-0400		4	6	3.7	8	16	54	4	●
5501R38414GM-0500		5	6	4.7	9	17	54	4	●
5501R38414GM-0600		6	6	5.7	10	18	54	4	●
5501R38414GM-0800		8	8	7.7	12	22	58	4	●
5501R38414GM-1000		10	10	9.5	14	26	66	4	●
5501R38414GM-1200		12	12	11.5	16	28	73	4	●
5501R38414GM-1400		14	14	13.5	18	30	75	4	●
5501R38414GM-1600		16	16	15.5	22	34	82	4	●
5501R38414GM-1800		18	18	17.5	24	36	84	4	●
5501R38414GM-2000		20	20	19.5	26	42	92	4	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index




**A**

## End mill long cutting edge HSC/HPC machining

**5502R38414GM**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405	KMG406
5502R38414GM-0400		4	6	3.7	11	19	57	4	●	●
5502R38414GM-0500		5	6	4.7	13	21	57	4	●	●
5502R38414GM-0600		6	6	5.7	13	21	57	4	●	●
5502R38414GM-0800		8	8	7.7	19	27	63	4	●	●
5502R38414GM-1000		10	10	9.5	22	32	72	4	●	●
5502R38414GM-1200		12	12	11.5	26	38	83	4	●	●
5502R38414GM-1400		14	14	13.5	26	38	83	4	●	●
5502R38414GM-1600		16	16	15.5	32	44	92	4	●	●
5502R38414GM-1800		18	18	17.5	32	44	92	4	●	●
5502R38414GM-2000		20	20	19.5	38	54	104	4	●	●

- Ex stock   ○ On demand
- \* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **HSC/HPC machining**

**5601R38414GM**



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
5601R38414GM-0400		4	6	3.7	8	16	54	4	●
5601R38414GM-0500		5	6	4.7	9	17	54	4	●
5601R38414GM-0600		6	6	5.7	10	18	54	4	●
5601R38414GM-0800		8	8	7.7	12	22	58	4	●
5601R38414GM-1000		10	10	9.5	14	26	66	4	●
5601R38414GM-1200		12	12	11.5	16	28	73	4	●
5601R38414GM-1400		14	14	13.5	18	30	75	4	●
5601R38414GM-1600		16	16	15.5	22	34	82	4	●
5601R38414GM-1800		18	18	17.5	24	36	84	4	●
5601R38414GM-2000		20	20	19.5	26	42	92	4	●

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index

**A**

## End mill long cutting edge HSC/HPC machining

### 5602R38414GM



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405	KMG406
5602R38414GM-0400		4	6	3.7	11	19	57	4	●	●
5602R38414GM-0500		5	6	4.7	13	21	57	4	●	●
5602R38414GM-0600		6	6	5.7	13	21	57	4	●	●
5602R38414GM-0800		8	8	7.7	19	27	63	4	●	●
5602R38414GM-1000		10	10	9.5	22	32	72	4	●	●
5602R38414GM-1200		12	12	11.5	26	38	83	4	●	●
5602R38414GM-1400		14	14	13.5	26	38	83	4	●	●
5602R38414GM-1600		16	16	15.5	32	44	92	4	●	●
5602R38414GM-1800		18	18	17.5	32	44	92	4	●	●
5602R38414GM-2000		20	20	19.5	38	54	104	4	●	●

- Ex stock   ○ On demand
- \* With internal cooling

Milling

**C**

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Torus mill long cutting edge** **HSC/HPC machining**

**5502R38414GM-R**



- Type of shank DIN 6535HA
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]							Teeth	Grade
		D	R	d (h6)	d <sub>1</sub>	H	M	L		
5502R38414GM-R02-0400		4	0.2	6	3.7	11	19	57	4	●
5502R38414GM-R05-0400		4	0.5	6	3.7	11	19	57	4	●
5502R38414GM-R02-0500		5	0.2	6	4.7	13	21	57	4	●
5502R38414GM-R05-0500		5	0.5	6	4.7	13	21	57	4	●
5502R38414GM-R02-0600		6	0.2	6	5.7	13	21	57	4	●
5502R38414GM-R05-0600		6	0.5	6	5.7	13	21	57	4	●
5502R38414GM-R10-0600		6	1	6	5.7	13	21	57	4	●
5502R38414GM-R02-0800		8	0.2	8	7.7	19	27	63	4	●
5502R38414GM-R05-0800		8	0.5	8	7.7	19	27	63	4	●
5502R38414GM-R10-0800		8	1	8	7.7	19	27	63	4	●
5502R38414GM-R15-0800		8	1.5	8	7.7	19	27	63	4	●
5502R38414GM-R20-0800		8	2	8	7.7	19	27	63	4	●
5502R38414GM-R02-1000		10	0.2	10	9.5	22	32	72	4	●
5502R38414GM-R05-1000		10	0.5	10	9.5	22	32	72	4	●
5502R38414GM-R10-1000		10	1	10	9.5	22	32	72	4	●
5502R38414GM-R15-1000		10	1.5	10	9.5	22	32	72	4	●
5502R38414GM-R20-1000		10	2	10	9.5	22	32	72	4	●
5502R38414GM-R05-1200		12	0.5	12	11.5	26	38	83	4	●
5502R38414GM-R10-1200		12	1	12	11.5	26	38	83	4	●
5502R38414GM-R15-1200		12	1.5	12	11.5	26	38	83	4	●
5502R38414GM-R20-1200		12	2	12	11.5	26	38	83	4	●
5502R38414GM-R10-1600		16	1	16	15.5	32	44	92	4	●
5502R38414GM-R15-1600		16	1.5	16	15.5	32	44	92	4	●
5502R38414GM-R20-1600		16	2	16	15.5	32	44	92	4	●
5502R38414GM-R30-1600		16	3	16	15.5	32	44	92	4	●
5502R38414GM-R10-2000		20	1	20	19.5	38	54	104	4	●
5502R38414GM-R15-2000		20	1.5	20	19.5	38	54	104	4	●
5502R38414GM-R20-2000		20	2	20	19.5	38	54	104	4	●
5502R38414GM-R30-2000		20	3	20	19.5	38	54	104	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## Torus mill long cutting edge HSC/HPC machining

### 5602R38414GM-R



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]							Teeth	Grade
		D	R	d (h6)	d <sub>1</sub>	H	M	L		KMG405
5602R38414GM-R02-0400		4	0.2	6	3.7	11	19	57	4	●
5602R38414GM-R05-0400		4	0.5	6	3.7	11	19	57	4	●
5602R38414GM-R02-0500		5	0.2	6	4.7	13	21	57	4	●
5602R38414GM-R05-0500		5	0.5	6	4.7	13	21	57	4	●
5602R38414GM-R02-0600		6	0.2	6	5.7	13	21	57	4	●
5602R38414GM-R05-0600		6	0.5	6	5.7	13	21	57	4	●
5602R38414GM-R10-0600		6	1	6	5.7	13	21	57	4	●
5602R38414GM-R02-0800		8	0.2	8	7.7	19	27	63	4	●
5602R38414GM-R05-0800		8	0.5	8	7.7	19	27	63	4	●
5602R38414GM-R10-0800		8	1	8	7.7	19	27	63	4	●
5602R38414GM-R15-0800		8	1.5	8	7.7	19	27	63	4	●
5602R38414GM-R20-0800		8	2	8	7.7	19	27	63	4	●
5602R38414GM-R02-1000		10	0.2	10	9.5	22	32	72	4	●
5602R38414GM-R05-1000		10	0.5	10	9.5	22	32	72	4	●
5602R38414GM-R10-1000		10	1	10	9.5	22	32	72	4	●
5602R38414GM-R15-1000		10	1.5	10	9.5	22	32	72	4	●
5602R38414GM-R20-1000		10	2	10	9.5	22	32	72	4	●
5602R38414GM-R05-1200		12	0.5	12	11.5	26	38	83	4	●
5602R38414GM-R10-1200		12	1	12	11.5	26	38	83	4	●
5602R38414GM-R15-1200		12	1.5	12	11.5	26	38	83	4	●
5602R38414GM-R20-1200		12	2	12	11.5	26	38	83	4	●
5602R38414GM-R10-1600		16	1	16	15.5	32	44	92	4	●
5602R38414GM-R15-1600		16	1.5	16	15.5	32	44	92	4	●
5602R38414GM-R20-1600		16	2	16	15.5	32	44	92	4	●
5602R38414GM-R30-1600		16	3	16	15.5	32	44	92	4	●
5602R38414GM-R10-2000		20	1	20	19.5	38	54	104	4	●
5602R38414GM-R15-2000		20	1.5	20	19.5	38	54	104	4	●
5602R38414GM-R20-2000		20	2	20	19.5	38	54	104	4	●
5602R38414GM-R30-2000		20	3	20	19.5	38	54	104	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable


System code > B278

Cutting data > B492



Nonstandard order > B541

End mill **HSC/HPC machining**

**UM-4E**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]					Teeth	Geometry	Grade	
		D	d (h6)	H	L	S			KMG405	YK40F
UM-4E-D4.0S		4	4	11	50	6	4	B	●	
UM-4E-D4.0		4	6	11	50	6	4	A	●	
UM-4E-D4.5		4.5	6	11	50	6.75	4	A	●	
UM-4E-D5.0		5	6	13	50	7.5	4	A	●	
UM-4E-D5.5		5.5	6	16	50	8.25	4	A	●	
UM-4E-D6.0		6	6	16	50	9	4	B	●	○
UM-4E-D7.0		7	8	20	60	10.5	4	A	●	
UM-4E-D8.0		8	8	20	60	12	4	B	●	○
UM-4E-D9.0		9	10	22	75	13.5	4	A	●	
UM-4E-D10.0		10	10	25	75	15	4	B	●	○
UM-4E-D11.0		11	12	26	75	16.5	4	A	●	
UM-4E-D12.0		12	12	30	75	18	4	B	●	○
UM-4E-D14.0		14	14	32	75	21	4	B	●	
UM-4E-D16.0		16	16	45	100	24	4	B	●	○
UM-4E-D18.0		18	18	45	100	27	4	B	●	
UM-4E-D20.0		20	20	45	100	30	4	B	●	

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index


**A**

End mill



HSC/HPC machining

Turning

UM-4E-W



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 38°/41°



**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade	
		D	d (h6)	H	L	S			KMG405	YK40F
UM-4E-D4.0-W		4	6	11	50	6	4	A	●	
UM-4E-D4.5-W		4.5	6	11	50	6.75	4	A	●	
UM-4E-D5.0-W		5	6	13	50	7.5	4	A	●	
UM-4E-D5.5-W		5.5	6	16	50	8.25	4	A	●	
UM-4E-D6.0-W		6	6	16	50	9	4	B	●	○
UM-4E-D7.0-W		7	8	20	60	10.5	4	A	●	
UM-4E-D8.0-W		8	8	20	60	12	4	B	●	○
UM-4E-D9.0-W		9	10	22	75	13.5	4	A	●	
UM-4E-D10.0-W		10	10	25	75	15	4	B	●	○
UM-4E-D11.0-W		11	12	26	75	16.5	4	A	●	
UM-4E-D12.0-W		12	12	30	75	18	4	B	●	○
UM-4E-D14.0-W		14	14	32	75	21	4	B	●	○
UM-4E-D16.0-W		16	16	45	100	24	4	B	●	○
UM-4E-D18.0-W		18	18	45	100	27	4	B	●	
UM-4E-D20.0-W		20	20	45	100	30	4	B	●	

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

**D**

Technical Information

Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill long cutting edge** **HSC/HPC machining**

**UM-4EL**



- Factory standard
- Centre cutting
- Helix angle 38°/41°

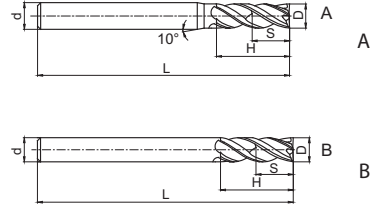

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		D	d (h6)	H	L	S			KMG405
UM-4EL-D4.0		4	6	15	75	6	4	A	●
UM-4EL-D5.0		5	6	20	75	7.5	4	A	●
UM-4EL-D6.0		6	6	20	75	9	4	B	●
UM-4EL-D8.0		8	8	25	100	12	4	B	●
UM-4EL-D10.0		10	10	30	100	15	4	B	●
UM-4EL-D12.0		12	12	35	100	18	4	B	●
UM-4EL-D14.0		14	14	40	100	21	4	B	●
UM-4EL-D16.0		16	16	50	150	24	4	B	●
UM-4EL-D20.0		20	20	55	150	30	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

## End mill long cutting edge HSC/HPC machining

### UM-4EL-W



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 38°/41°

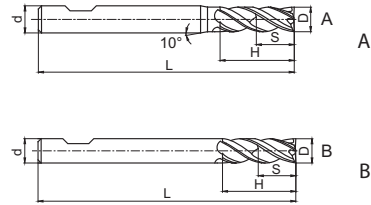

Turning

**B**

Milling

Article	*	Dimensions [mm]					Teeth	Geometry	Grade
		D	d (h6)	H	L	S			KMG405
UM-4EL-D4.0-W		4	6	15	75	6	4	A	●
UM-4EL-D5.0-W		5	6	20	75	7.5	4	A	●
UM-4EL-D6.0-W		6	6	20	75	9	4	B	●
UM-4EL-D8.0-W		8	8	25	100	12	4	B	●
UM-4EL-D10.0-W		10	10	30	100	15	4	B	●
UM-4EL-D12.0-W		12	12	35	100	18	4	B	●
UM-4EL-D14.0-W		14	14	40	100	21	4	B	●
UM-4EL-D16.0-W		16	16	50	150	24	4	B	●
UM-4EL-D20.0-W		20	20	55	150	30	4	B	●

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill reduced neck **HSC/HPC machining**

**UM-4ELP-W**



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
UM-4ELP-D4.0-W		4	6	3.8	15	36	75	4	●
UM-4ELP-D5.0-W		5	6	4.8	20	36	75	4	●
UM-4ELP-D6.0-W		6	6	5.7	20	36	75	4	●
UM-4ELP-D8.0-W		8	8	7.7	25	60	100	4	●
UM-4ELP-D10.0-W		10	10	9.5	30	55	100	4	●
UM-4ELP-D12.0-W		12	12	11.5	35	50	100	4	●
UM-4ELP-D14.0-W		14	14	13.5	40	50	100	4	●
UM-4ELP-D16.0-W		16	16	15.5	50	100	150	4	●
UM-4ELP-D20.0-W		20	20	19.5	55	98	150	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

End mill short cutting edge **HSC/HPC machining**

**UM-4EFP**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
UM-4EFP-D6.0		6	6	5.8	9	30	75	4	●
UM-4EFP-D8.0		8	8	7.8	12	40	100	4	●
UM-4EFP-D10.0		10	10	9.6	15	50	100	4	●
UM-4EFP-D12.0		12	12	11.5	18	50	100	4	●
UM-4EFP-D16.0		16	16	15.5	24	50	150	4	●
UM-4EFP-D20.0		20	20	19.5	30	60	150	4	●

- Ex stock ○ On demand
- \* With internal cooling

Milling

**C**

Application field						
P	M	K	N	S	H	
✓	✓	✓			✓	✓ Very suitable ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill** **HSC/HPC machining**

**UM-4R**



- Factory standard
- Centre cutting
- Helix angle 38°/41°

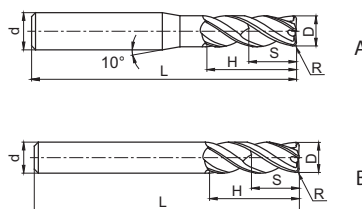

Article	*	Dimensions [mm]						Teeth	Geometry	Grade
		R	D	d (h6)	H	L	S			KMG405
UM-4R-D4.0R0.3		0.3	4	6	10	50	6	4	A	●
UM-4R-D4.0R0.5		0.5	4	6	10	50	6	4	A	●
UM-4R-D5.0R0.5		0.5	5	6	13	50	7.5	4	A	●
UM-4R-D5.0R1.0		1	5	6	13	50	7.5	4	A	●
UM-4R-D6.0R0.5		0.5	6	6	16	50	9	4	B	●
UM-4R-D6.0R1.0		1	6	6	16	50	9	4	B	●
UM-4R-D8.0R0.5		0.5	8	8	20	60	12	4	B	●
UM-4R-D8.0R1.0		1	8	8	20	60	12	4	B	●
UM-4R-D10.0R0.5		0.5	10	10	25	75	15	4	B	●
UM-4R-D10.0R1.0		1	10	10	25	75	15	4	B	●
UM-4R-D10.0R2.0		2	10	10	25	75	15	4	B	●
UM-4R-D10.0R3.0		3	10	10	25	75	15	4	B	●
UM-4R-D12.0R0.5		0.5	12	12	30	75	18	4	B	●
UM-4R-D12.0R1.0		1	12	12	30	75	18	4	B	●
UM-4R-D12.0R2.0		2	12	12	30	75	18	4	B	●
UM-4R-D12.0R3.0		3	12	12	30	75	18	4	B	●
UM-4R-D16.0R0.5		0.5	16	16	45	100	24	4	B	●
UM-4R-D16.0R1.0		1	16	16	45	100	24	4	B	●
UM-4R-D16.0R2.0		2	16	16	45	100	24	4	B	●
UM-4R-D16.0R3.0		3	16	16	45	100	24	4	B	●
UM-4R-D20.0R1.0		1	20	20	45	100	30	4	B	●
UM-4R-D20.0R2.0		2	20	20	45	100	30	4	B	●
UM-4R-D20.0R3.0		3	20	20	45	100	30	4	B	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information


**E**

Index


**A**

## Torus mill long shank HSC/HPC machining

**UM-4RL**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d (h6)	H	L	S		KMG405
UM-4RL-D6.0R0.5		0.5	6	6	16	75	9	4	●
UM-4RL-D6.0R1.0		1	6	6	16	75	9	4	●
UM-4RL-D8.0R0.5		0.5	8	8	20	100	12	4	●
UM-4RL-D8.0R1.0		1	8	8	20	100	12	4	●
UM-4RL-D10.0R0.5		0.5	10	10	25	100	15	4	●
UM-4RL-D10.0R1.0		1	10	10	25	100	15	4	●
UM-4RL-D10.0R2.0		2	10	10	25	100	15	4	●
UM-4RL-D12.0R0.5		0.5	12	12	30	100	18	4	●
UM-4RL-D12.0R1.0		1	12	12	30	100	18	4	●
UM-4RL-D12.0R2.0		2	12	12	30	100	18	4	●
UM-4RL-D16.0R1.0		1	16	16	45	150	24	4	●
UM-4RL-D16.0R2.0		2	16	16	45	150	24	4	●

- Ex stock   ○ On demand
- \* With internal cooling

Milling

**C**

Application field						
P	M	K	N	S	H	
✓	✓	✓			✓	✓ Very suitable ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Torus mill short cutting edge** **HSC/HPC machining**

**UM-4RFP**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG405
UM-4RFP-D6.0R0.5		0.5	6	6	5.8	6	18	75	4	●
UM-4RFP-D6.0R1.0		1	6	6	5.8	6	18	75	4	●
UM-4RFP-D8.0R0.5		0.5	8	8	7.7	8	24	100	4	●
UM-4RFP-D8.0R1.0		1	8	8	7.7	8	24	100	4	●
UM-4RFP-D10.0R0.5		0.5	10	10	9.6	10	30	100	4	●
UM-4RFP-D10.0R1.0		1	10	10	9.6	10	30	100	4	●
UM-4RFP-D10.0R2.0		2	10	10	9.6	10	30	100	4	●
UM-4RFP-D12.0R0.5		0.5	12	12	11.5	12	36	100	4	●
UM-4RFP-D12.0R1.0		1	12	12	11.5	12	36	100	4	●
UM-4RFP-D12.0R2.0		2	12	12	11.5	12	36	100	4	●
UM-4RFP-D16.0R1.0		1	16	16	15.5	16	40	150	4	●
UM-4RFP-D16.0R2.0		2	16	16	15.5	16	40	150	4	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541




**A**

End mill


HSC/HPC machining

Turning

UM-5EP-W



- Factory standard with weldon clamping surface
- Non-centre cutting
- Helix angle 38°/39°/40°



**B**

Milling

Article	*	Dimensions [mm]						Grade
		D	d (h6)	d <sub>1</sub>	H	M	L	KMG405
UM-5EP-D6.0-W		6	6	5.7	16	22	58	●
UM-5EP-D8.0-W		8	8	7.7	21	27	63	●
UM-5EP-D10.0-W		10	10	9.5	24	35	75	●
UM-5EP-D12.0-W		12	12	11.5	31	43	88	●
UM-5EP-D16.0-W		16	16	15.5	36	52	100	●
UM-5EP-D20.0-W		20	20	19.5	41	72	126	●
UM-5EP-D25.0-W		25	25	24	51	102	160	○

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

Application field						
P	M	K	N	S	H	
✓	✓	✓			✓	✓ Very suitable
						✓ Suitable

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

End mill **HSC/HPC machining**

**UMC-4E**



- Factory standard
- Centre cutting
- Helix angle 38°/40°



Article	*	Dimensions [mm]							Grade
		D	d (h6)	d <sub>1</sub>	H	M	L	S	
UMC-4E-D6.0		6	6	5.8	18	24	60	9	○
UMC-4E-D8.0		8	8	7.8	24	34	70	12	○
UMC-4E-D10.0		10	10	9.6	30	40	80	15	○
UMC-4E-D12.0		12	12	11.5	36	45	90	18	○
UMC-4E-D16.0		16	16	15.5	48	62	110	24	○
UMC-4E-D20.0		20	20	19.5	60	80	130	30	○

- Ex stock ○ On demand
- \* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

System code > B278

Cutting data > B492

Nonstandard order > B541







**A**

**End mill** HSC/HPC machining

**UMC-4E-W**



- Factory standard with weldon clamping surface
- Centre cutting
- Helix angle 38°/40°



Turning

**B**

Article	*	Dimensions [mm]							Grade
		D	d (h6)	d <sub>1</sub>	H	M	L	S	KMG405
UMC-4E-D6.0-W		6	6	5.8	18	24	60	9	○
UMC-4E-D8.0-W		8	8	7.8	24	34	70	12	○
UMC-4E-D10.0-W		10	10	9.6	30	40	80	15	○
UMC-4E-D12.0-W		12	12	11.5	36	45	90	18	○
UMC-4E-D16.0-W		16	16	15.5	48	62	110	24	○
UMC-4E-D20.0-W		20	20	19.5	60	80	130	30	○

- Ex stock ○ On demand
- \* With internal cooling

Milling

**C**

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**End mill**    **General machining of heat-resistant alloys**

**VSM-4E**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG405
VSM-4E-D4.0		4	6	11	50	4	●
VSM-4E-D5.0		5	6	13	50	4	●
VSM-4E-D6.0		6	6	16	50	4	●
VSM-4E-D8.0		8	8	20	60	4	●
VSM-4E-D10.0		10	10	25	75	4	●
VSM-4E-D12.0		12	12	30	75	4	●
VSM-4E-D16.0		16	16	45	100	4	●
VSM-4E-D20.0		20	20	45	100	4	●

● Ex stock    ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## End mill General machining of heat-resistant alloys

### VSM-4E-C



- Factory standard
- Coolant exit, radial
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]				Teeth	Grade
		D	d (h6)	H	L		KMG405
VSM-4E-C-D10.0	*	10	10	25	75	4	○
VSM-4E-C-D12.0	*	12	12	30	75	4	○
VSM-4E-C-D16.0	*	16	16	45	100	4	○
VSM-4E-C-D20.0	*	20	20	45	100	4	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Application field						
P	M	K	N	S	H	
✓	✓			✓		✓ Very suitable
						✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Torus mill**    **General machining of heat-resistant alloys**

**VSM-4R**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Article	*	Dimensions [mm]					Teeth	Grade
		D	R	d (h6)	H	L		KMG405
VSM-4R-D4.0R0.2		4	0.2	6	11	50	4	●
VSM-4R-D4.0R0.5		4	0.5	6	11	50	4	●
VSM-4R-D5.0R0.2		5	0.2	6	13	50	4	●
VSM-4R-D5.0R0.5		5	0.5	6	13	50	4	●
VSM-4R-D6.0R0.2		6	0.2	6	16	50	4	●
VSM-4R-D6.0R0.5		6	0.5	6	16	50	4	●
VSM-4R-D6.0R1.0		6	1	6	16	50	4	●
VSM-4R-D6.0R1.5		6	1.5	6	16	50	4	●
VSM-4R-D8.0R0.5		8	0.5	8	20	63	4	●
VSM-4R-D8.0R0.8		8	0.8	8	20	63	4	●
VSM-4R-D8.0R1.0		8	1	8	20	63	4	●
VSM-4R-D8.0R1.5		8	1.5	8	20	63	4	●
VSM-4R-D8.0R2.0		8	2	8	20	63	4	●
VSM-4R-D10.0R0.5		10	0.5	10	25	75	4	●
VSM-4R-D10.0R0.8		10	0.8	10	25	75	4	●
VSM-4R-D10.0R1.0		10	1	10	25	75	4	●
VSM-4R-D10.0R1.5		10	1.5	10	25	75	4	●
VSM-4R-D10.0R2.0		10	2	10	25	75	4	●
VSM-4R-D12.0R0.5		12	0.5	12	30	75	4	●
VSM-4R-D12.0R0.8		12	0.8	12	30	75	4	●
VSM-4R-D12.0R1.0		12	1	12	30	75	4	●
VSM-4R-D12.0R1.5		12	1.5	12	30	75	4	●
VSM-4R-D12.0R2.0		12	2	12	30	75	4	●
VSM-4R-D12.0R2.5		12	2.5	12	30	75	4	●
VSM-4R-D12.0R3.0		12	3	12	30	75	4	●
VSM-4R-D12.0R4.0		12	4	12	30	75	4	●
VSM-4R-D16.0R0.5		16	0.5	16	45	100	4	●
VSM-4R-D16.0R0.8		16	0.8	16	45	100	4	●
VSM-4R-D16.0R1.0		16	1	16	45	100	4	●
VSM-4R-D16.0R1.5		16	1.5	16	45	100	4	●
VSM-4R-D16.0R2.0		16	2	16	45	100	4	●
VSM-4R-D16.0R2.5		16	2.5	16	45	100	4	●
VSM-4R-D16.0R3.0		16	3	16	45	100	4	●
VSM-4R-D16.0R4.0		16	4	16	45	100	4	●
VSM-4R-D20.0R0.5		20	0.5	20	45	100	4	●
VSM-4R-D20.0R1.0		20	1	20	45	100	4	●
VSM-4R-D20.0R1.5		20	1.5	20	45	100	4	●

● Ex stock    ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓			✓	

✓ Very suitable

✓ Suitable

System code > B278    Cutting data > B492    Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information


E

Index


**A**

## Torus mill **General machining of heat-resistant alloys**

**VSM-4R**



- Factory standard
- Centre cutting
- Helix angle 38°/41°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		D	R	d (h6)	H	L		KMG405
VSM-4R-D20.0R2.0		20	2	20	45	100	4	●
VSM-4R-D20.0R2.5		20	2.5	20	45	100	4	●
VSM-4R-D20.0R3.0		20	3	20	45	100	4	●
VSM-4R-D20.0R4.0		20	4	20	45	100	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓			✓	

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541


Deburring cutter 60°

General machining

5501/5601R60\*FM



- Type of shank DIN 6535HA
- Type of shank: DIN 6535HB
- Non-centre cutting
- Helix angle 0°



Article	*	Dimensions [mm]					Teeth	Grade
		d(h6)	L	D	Shank	X		KMG303
5501R603FM-0300		3	48	0.2	HA	60	3	●
5501R604FM-0400		4	48	0.2	HA	60	4	●
5601R604FM-0600		6	55	0.2	HB	60	4	●
5601R604FM-0800		8	58	0.5	HB	60	4	●
5601R604FM-1000		10	65	0.5	HB	60	4	●
5601R606FM-1000		10	65	0.7	HB	60	6	○
5601R604FM-1200		12	75	0.5	HB	60	4	●
5601R606FM-1200		12	75	0.7	HB	60	6	○
5601R604FM-1600		16	85	0.7	HB	60	4	●
5601R606FM-1600		16	85	0.7	HB	60	6	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓	✓		

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541



A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

**A**


## Deburring cutter 90° General machining

Turning

### 5501/5601R90\*FM



- Type of shank DIN 6535HA
- Type of shank: DIN 6535HB
- Non-centre cutting
- Helix angle 0°



**B**

Milling

Article	*	Dimensions [mm]					Teeth	Grade
		d(h6)	L	D	Shank	X		KMG303
5501R903FM-0300		3	48	0.2	HA	90	3	●
5501R904FM-0400		4	48	0.2	HA	90	4	●
5601R904FM-0600		6	55	0.2	HB	90	4	●
5601R904FM-0800		8	58	0.5	HB	90	4	●
5601R904FM-1000		10	65	0.5	HB	90	4	●
5601R906FM-1000		10	65	0.7	HB	90	6	○
5601R904FM-1200		12	75	0.5	HB	90	4	●
5601R906FM-1200		12	75	0.7	HB	90	6	○
5501R904FM-1600		16	85	0.7	HA	90	4	○
5601R904FM-1600		16	85	0.7	HB	90	4	●
5601R906FM-1600		16	85	0.7	HB	90	6	○

● Ex stock ○ On demand

\* With internal cooling

**C**

Drilling

#### Application field

P	M	K	N	S	H
✓	✓	✓	✓		

✓ Very suitable

✓ Suitable

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492

Nonstandard order > B541


Deburring cutter

General machining

5501/5601R120\*FM



- Type of shank DIN 6535HA
- Type of shank: DIN 6535HB
- Non-centre cutting
- Helix angle 0°



Article	*	Dimensions [mm]					Teeth	Grade
		d(h6)	L	D	Shank	X		KMG406
5501R1203FM-0300		3	48	0.2	HA	120	3	○
5501R1204FM-0400		4	48	0.2	HA	120	4	○
5501R1204FM-0600		6	55	0.2	HA	120	4	○
5601R1204FM-0600		6	55	0.2	HB	120	4	○
5501R1204FM-0800		8	58	0.5	HA	120	4	○
5601R1204FM-0800		8	58	0.5	HB	120	4	○
5501R1204FM-1000		10	65	0.5	HA	120	4	○
5601R1204FM-1000		10	65	0.5	HB	120	4	○
5601R1206FM-1000		10	65	0.7	HB	120	6	○
5501R1206FM-1000		10	65	0.7	HA	120	6	○
5501R1204FM-1200		12	75	0.5	HA	120	4	○
5601R1204FM-1200		12	75	0.5	HB	120	4	○
5601R1206FM-1200		12	75	0.7	HB	120	6	○
5501R1206FM-1200		12	75	0.7	HA	120	6	○
5501R1206FM-1600		16	85	0.7	HA	120	6	○
5601R1204FM-1600		16	85	0.7	HB	120	4	○
5501R1204FM-1600		16	85	0.7	HA	120	4	○
5601R1206FM-1600		16	85	0.7	HB	120	6	○

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓	✓		

✓ Very suitable

✓ Suitable

System code > B278

Cutting data > B492

Nonstandard order > B541





A

### Quarter round profile mill


### General machining

Turning

#### 5601R90\*FM-R



- Type of shank: DIN 6535HB
- Non-centre cutting
- Helix angle 0°



B

Milling

Article	*	Dimensions [mm]				Teeth	Grade
		d(h6)	L	D	R		KMG303
5601R904FM-R02-0600		6	60	5.6	0.2	4	●
5601R904FM-R03-0600		6	60	5.4	0.3	4	●
5601R904FM-R04-0600		6	60	5.2	0.4	4	●
5601R904FM-R05-0800		8	70	7	0.5	4	●
5601R904FM-R06-0800		8	70	6.8	0.6	4	●
5601R904FM-R075-0800		8	70	6.5	0.75	4	●
5601R904FM-R08-0800		8	70	6.4	0.8	4	●
5601R904FM-R10-0800		8	70	6	1	4	●
5601R904FM-R15-1000		10	75	7	1.5	4	●
5601R904FM-R20-1000		10	75	6	2	4	●
5601R904FM-R25-1200		12	75	7	2.5	4	●
5601R904FM-R30-1200		12	75	6	3	4	●
5601R904FM-R40-1600		16	80	8	4	4	●
5601R904FM-R50-2000		20	80	10	5	4	●

● Ex stock ○ On demand

\* With internal cooling

C

Drilling

#### Application field

P	M	K	N	S	H
✓	✓	✓	✓		

✓ Very suitable

✓ Suitable

D

Technical Information

E

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

**Ball nose cutter** **High-performance machining**

**PM-2B**



- Centre cutting
- Helix angle 30°



Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d1	H	L	MD		KMG405
Q08-PM-2B-D12.0		6	12	11.5	7	17	8	2	●
Q10-PM-2B-D16.0		8	16	15.2	9	21.5	10	2	●
Q12-PM-2B-D20.0		10	20	19	11	25.5	12	2	●
Q14-PM-2B-D25.0		12.5	25	24	13.5	31.5	14	2	●
Q18-PM-2B-D32.0		16	32	30	17	36	18	2	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Ball nose cutter High-performance machining

**PM-4B**



- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d1	H	L	MD		
Q08-PM-4B-D12.0		6	12	11.5	7	17	8	4	●
Q10-PM-4B-D16.0		8	16	15.2	9	21.5	10	4	●
Q12-PM-4B-D20.0		10	20	19	11	25.5	12	4	●
Q14-PM-4B-D25.0		12.5	25	24	13.5	31.5	14	4	●
Q18-PM-4B-D32.0		16	32	30	17	36	18	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492



Nonstandard order > B541

**Square shoulder mill** **High-performance machining**

**PM-4E**



- Centre cutting
- Helix angle 45°



Article	*	Dimensions [mm]					Teeth	Grade
		D	d1	H	L	MD		KMG405
Q08-PM-4E-D12.0		12	11.5	7	17	8	4	●
Q10-PM-4E-D16.0		16	15.2	9	21.5	10	4	●
Q12-PM-4E-D20.0		20	19	11	25.5	12	4	●
Q14-PM-4E-D25.0		25	24	13.5	31.5	14	4	●
Q18-PM-4E-D32.0		32	30	17	36	18	4	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


A

## Torus mill **High-performance machining**

PM-4R



- Centre cutting
- Helix angle 30°



Turning

B

Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d1	H	L	MD		KMG405
Q08-PM-4R-D12.0R1.0		1	12	11.5	7	17	8	4	●
Q08-PM-4R-D12.0R2.0		2	12	11.5	7	17	8	4	●
Q10-PM-4R-D16.0R1.0		1	16	15.2	9	21.5	10	4	●
Q10-PM-4R-D16.0R1.5		1.5	16	15.2	9	21.5	10	4	●
Q10-PM-4R-D16.0R2.0		2	16	15.2	9	21.5	10	4	●
Q12-PM-4R-D20.0R1.0		1	20	19	11	25.5	12	4	●
Q12-PM-4R-D20.0R2.0		2	20	19	11	25.5	12	4	●
Q14-PM-4R-D25.0R1.0		1	25	24	13.5	31.5	14	4	●
Q14-PM-4R-D25.0R2.0		2	25	24	13.5	31.5	14	4	●
Q14-PM-4R-D25.0R2.5		2.5	25	24	13.5	31.5	14	4	●
Q18-PM-4R-D32.0R1.0		1	32	30	17	36	18	4	●
Q18-PM-4R-D32.0R2.0		2	32	30	17	36	18	4	●
Q18-PM-4R-D32.0R3.0		3	32	30	17	36	18	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

C

### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

Drilling

D

Technical Information

E


Index

System code > B278



Cutting data > B492

Nonstandard order > B541

**Square shoulder mill** **High-performance machining**



- Centre cutting
- Helix angle 38°



Article	*	Dimensions [mm]					Teeth	Grade
		D	d1	H	L	MD		KMG406
Q08-VPM-4E-D12.0		12	11.5	7	17	8	4	●
Q10-VPM-4E-D16.0		16	15.2	9	21.5	10	4	●
Q12-VPM-4E-D20.0		20	19	11	25.5	12	4	●
Q14-VPM-4E-D25.0		25	24	13.5	31.5	14	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541

**A**


Ball nose cutter

Hard machining

**HMX-2B**



- Centre cutting
- Helix angle 35°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d1	H	L	MD		KMG5515
Q08-HMX-2B-D12.0		6	12	11.5	7	17	8	2	●
Q10-HMX-2B-D16.0		8	16	15.2	9	21.5	10	2	●
Q12-HMX-2B-D20.0		10	20	19	11	25.5	12	2	●
Q14-HMX-2B-D25.0		12.5	25	24	13.5	31.5	14	2	●
Q18-HMX-2B-D32.0		16	32	30	17	36	18	2	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Application field

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

Drilling

**D**

Technical Information

**E**

Index


System code > B278

Cutting data > B492


Nonstandard order > B541

**Ball nose cutter** **Hard machining**

**HMX-4B**



- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d1	H	L	MD		KMG5515
Q08-HMX-4B-D12.0		6	12	11.5	7	17	8	4	●
Q10-HMX-4B-D16.0		8	16	15.2	9	21.5	10	4	●
Q12-HMX-4B-D20.0		10	20	19	11	25.5	12	4	●
Q14-HMX-4B-D25.0		12.5	25	24	13.5	31.5	14	4	●
Q18-HMX-4B-D32.0		16	32	30	17	36	18	4	●

● Ex stock ○ On demand

\* With internal cooling

**Application field**

P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

System code > B278

Cutting data > B492


Nonstandard order > B541




**A**

## Square shoulder mill Hard machining

**HMX-4E**



- Centre cutting
- Helix angle 45°



Turning

**B**

Article	*	Dimensions [mm]					Teeth	Grade
		D	d1	H	L	MD		KMG5515
Q08-HMX-4E-D12.0		12	11.5	7	17	8	4	●
Q10-HMX-4E-D16.0		16	15.2	9	21.5	10	4	●
Q12-HMX-4E-D20.0		20	19	11	25.5	12	4	●
Q14-HMX-4E-D25.0		25	24	13.5	31.5	14	4	●
Q18-HMX-4E-D32.0		32	30	17	36	18	4	●

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable  
 ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B278


Cutting data > B492

Nonstandard order > B541


**Torus mill**

**Hard machining**

**HMX-4R**



- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]						Teeth	Grade
		R	D	d1	H	L	MD		KMG405
Q08-HMX-4R-D12.0R1.0		1	12	11.5	7	17	8	4	●
Q08-HMX-4R-D12.0R2.0		2	12	11.5	7	17	8	4	●
Q10-HMX-4R-D16.0R1.0		1	16	15.2	9	21.5	10	4	●
Q10-HMX-4R-D16.0R1.5	*	1.5	16	15.2	9	21.5	10	4	●
Q10-HMX-4R-D16.0R2.0		2	16	15.2	9	21.5	10	4	●
Q12-HMX-4R-D20.0R1.0		1	20	19	11	25.5	12	4	●
Q12-HMX-4R-D20.0R2.0		2	20	19	11	25.5	12	4	●
Q14-HMX-4R-D25.0R1.0		1	25	24	13.5	31.5	14	4	●
Q14-HMX-4R-D25.0R2.0		2	25	24	13.5	31.5	14	4	●
Q14-HMX-4R-D25.0R2.5	*	2.5	25	24	13.5	31.5	14	4	●
Q18-HMX-4R-D32.0R1.0		1	32	30	17	36	18	4	●
Q18-HMX-4R-D32.0R2.0		2	32	30	17	36	18	4	●
Q18-HMX-4R-D32.0R3.0		3	32	30	17	36	18	4	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
					✓

✓ Very suitable

✓ Suitable

System code > B278


Cutting data > B492

Nonstandard order > B541




## Indexable heads shanks

Solid carbide shank, stepped, Q thread

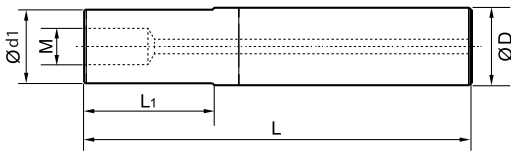


Article	Dimensions [mm]				Thread (M)	Stock
	D	d1	L	L1		
G12-QCH-Q08-80C	12	11,5	80	30	Q8	●
G12-QCH-Q08-100C	12	11,5	100	50	Q8	●
G12-QCH-Q08-120C	12	11,5	120	70	Q8	●
G16-QCH-Q10-90C	16	15,2	90	40	Q10	●
G16-QCH-Q10-120C	16	15,2	120	70	Q10	●
G16-QCH-Q10-150C	16	15,2	150	100	Q10	●
G20-QCH-Q12-100C	20	19	100	40	Q12	●
G20-QCH-Q12-140C	20	19	140	80	Q12	●
G20-QCH-Q12-180C	20	19	180	120	Q12	●
G25-QCH-Q14-120C	25	24	120	50	Q14	●
G25-QCH-Q14-170C	25	24	170	100	Q14	●
G25-QCH-Q14-220C	25	24	220	150	Q14	●
G32-QCH-Q18-140C	32	30	140	70	Q18	●
G32-QCH-Q18-200C	32	30	200	130	Q18	●
G32-QCH-Q18-260C	32	30	260	190	Q18	●
G32-QCH-Q18-320C	32	30	320	250	Q18	●

Solid carbide shank, tapered, Q thread

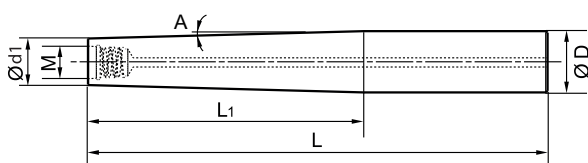


Article	Dimensions [mm]				Thread (M)	Angle (A)	Stock
	D	d1	L	L1			
G16-QCH-Q08-140C-ZJ90	16	11,5	140	90	Q8	1,0	●
G20-QCH-Q10-200C-ZJ140	20	15,2	200	140	Q8	0,8	●
G25-QCH-Q12-250C-ZJ180	25	19	250	180	Q8	0,8	●
G32-QCH-Q14-270C-ZJ200	32	30	270	200	Q10	0,8	●

### Spare parts

	Thread	Q8 / Q10	Q12 / Q14	Q18
	Wrench	QCH-10×13	QCH-16×20	QCH-26


## Indexable heads shanks

Steel shank, stepped, Q thread

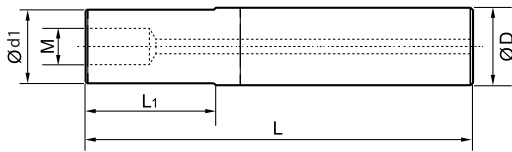

Article	Dimensions [mm]				Thread (M)	Stock
	D	d1	L	L1		
G12-QCH-Q08-65S	12	11,5	65	19	Q08	●
G16-QCH-Q10-100S	16	15,2	100	42	Q10	●
G20-QCH-Q12-110S	20	19	110	54	Q12	●

Solid carbide shank, stepped, metric thread

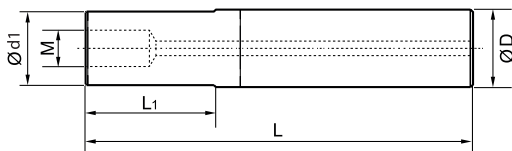

Article	Dimensions [mm]				Thread (M)	Stock
	D	d1	L	L1		
G16-QCH-M8-90C-125	16	12,5	90	35	M8	○
G16-QCH-M8-110C-125	16	12,5	110	55	M8	○
G16-QCH-M8-130C-125	16	12,5	130	75	M8	○
G16-QCH-M8-90C	16	15	90	35	M8	○
G16-QCH-M8-110C	16	15	110	55	M8	○
G16-QCH-M8-130C	16	15	130	75	M8	○
G16-QCH-M8-170C	16	15	170	115	M8	○
G16-QCH-M8-200C	16	15	200	145	M8	○
G20-QCH-M10-87C	20	18,5	87	30	M10	○
G20-QCH-M10-107C	20	18,5	107	50	M10	○
G20-QCH-M10-127C	20	18,5	127	70	M10	○
G20-QCH-M10-167C	20	18,5	167	110	M10	○
G20-QCH-M10-197C	20	18,5	197	140	M10	○
G25-QCH-M12-128C	25	23	128	65	M12	○
G25-QCH-M12-148C	25	23	148	85	M12	○
G25-QCH-M12-168C	25	23	168	105	M12	○
G25-QCH-M12-198C	25	23	198	135	M12	○
G25-QCH-M12-228C	25	23	228	165	M12	○
G32-QCH-M16-161C	32	29	161	95	M16	○
G32-QCH-M16-211C	32	29	211	145	M16	○
G32-QCH-M16-281C	32	29	281	215	M16	○
G32-QCH-M16-311C	32	29	311	245	M16	○
G32-QCH-M16-361C	32	29	361	295	M16	○

A

Turning

B

Milling

C

Drilling

D

Technical  
Information

E

Index

## Guide for recommended cutting data – solid carbide milling

### End mill – GM series

1	Material group	Composition / structure / heat treatment	2 Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]									
					5501R302GM 5601R302GM 5502R302GM 5602R302GM				GM-2E GM-2EFP GM-2F					
					Slot milling		Shoulder milling		Slot milling		Shoulder milling			
					$\phi$ [mm]	$a_{p,max}$	$\phi$ [mm]	$a_{e,max}$	$\phi$ [mm]	$a_{p,max}$	$\phi$ [mm]	$a_{e,max}$		
P	Unalloyed steel	ca. 0,15 % C	annealed	125	1	150	200	270	2	150	200	270	2	
		ca. 0,45 % C	annealed	190	2	145	190	260	2	145	190	260	2	
		ca. 0,45 % C	tempered	250	3	105	140	190	2	105	140	190	2	
		ca. 0,75 % C	annealed	270	4	90	120	165	2	90	120	165	2	
		ca. 0,75 % C	tempered	300	5	85	110	150	2	85	110	150	2	
	Low-alloyed steel		annealed	180	6	115	150	205	2	115	150	205	2	
			tempered	275	7	90	120	165	2	90	120	165	2	
			tempered	300	8	85	110	150	2	85	110	150	2	
	High-alloyed steel and high-alloyed tool steel		annealed	200	10	105	140	190	2	105	140	190	2	
			hardened and tempered	325	11	80	110	145	2	80	110	145	2	
	M	Stainless steel	ferritic/martensitic	annealed	200	12	50	65	90	2	50	65	90	2
			martensitic	tempered	240	13	45	60	80	2	45	60	80	2
austenitic			quench hardened	180	14	55	70	95	2	55	70	95	2	
austenitic-ferritic				230	15	45	60	80	2	45	60	80	2	
K	Grey cast iron	perlite/ferritic		180	16	110	150	200	2	110	150	200	2	
		perlite (martensitic)		260	17	90	120	165	2	90	120	165	2	
K	Cast iron with spheroidal graphite	ferritic		160	18	135	180	245	2	135	180	245	2	
		perlite		250	15	105	140	190	2	105	140	190	2	
		ferritic		130	20	150	200	270	2	150	200	270	2	
K	Malleable cast iron	perlite		230	21	120	160	220	2	120	160	220	2	
N	Aluminium wrought alloys	cannot be hardened		60	22									
		hardenable	hardened	100	23									
	Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		75	24									
		$\leq 12\%$ Si, hardenable	hardened	90	25									
D	Copper and copper alloys (bronze/brass)	$> 12\%$ Si, cannot be hardened		130	26									
		machining steel, PB> 1%		110	27									
		CuZn, CuSnZn		90	28									
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30									
			hardened	280	31									
		Ni or Co base	annealed	250	32									
			hardened	350	33									
S	Titanium alloys	cast		320	34									
		pure titanium		$R_m$ 400	35									
H	Hardened steel	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36									
			hardened and tempered	55 HRC	37									
			hardened and tempered	60 HRC	38									
H	Hard cast iron	cast		400	39									
		hardened cast iron		hardened and tempered	55 HRC	40								
E	Non-metallic materials	Thermoplasts			41									
		Thermosetting plastics				42								
		Plastic, glass-fibre reinforced GFRP				43								
		Plastic, carbon fibre reinforced CFRP				44								
		Graphite				45								
		Wood				46								

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.  
Feed rate recommendations on page B460  
For examples of material for cutting tool groups view page D22.

**Recommend feed rate**

**Solid carbide milling group 2 – Square shoulder mills GM series**

4 $a_p/D$	Feed rate per cutting edge ( $f_z$ ) [mm]															
	Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
P	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12
M	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18
	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09
K	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15
	1/1	0,01	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
5	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases.

1. Select the appropriate product series.
2. Determine the immersion.
3. Select the used material and read the cutting speed.
4. Determine the feed rate group and have a look at the appropriate feed rate recommendations.
5. Select the diameter of tool and determine the immersion.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

## End mill – GM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]									
				5501R302GM 5601R302GM 5502R302GM 5602R302GM					GM-2E GM-2EFP GM-2F				
				Slot milling		Shoulder milling			Slot milling		Shoulder milling		
				$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max		
				$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$		
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	150	200	270	2	150	200	270	2	
	approx. 0,45 % C	annealed	190	2	145	190	260	2	145	190	260	2	
	approx. 0,45 % C	tempered	250	3	105	140	190	2	105	140	190	2	
	approx. 0,75 % C	annealed	270	4	90	120	165	2	90	120	165	2	
	approx. 0,75 % C	tempered	300	5	85	110	150	2	85	110	150	2	
P Low-alloyed steel		annealed	180	6	115	150	205	2	115	150	205	2	
		tempered	275	7	90	120	165	2	90	120	165	2	
		tempered	300	8	85	110	150	2	85	110	150	2	
		tempered	350	9	80	105	145	2	80	105	145	2	
P High-alloyed steel and high-alloyed tool steel		annealed	200	10	105	140	190	2	105	140	190	2	
		hardened and tempered	325	11	80	110	145	2	80	110	145	2	
M Stainless steel	ferritic/martensitic	annealed	200	12	50	65	90	2	50	65	90	2	
	martensitic	tempered	240	13	45	60	80	2	45	60	80	2	
	austenitic	quench hardened	180	14	55	70	95	2	55	70	95	2	
	austenitic-ferritic		230	15	45	60	80	2	45	60	80	2	
K Grey cast iron	perlitic/ferritic		180	16	110	150	200	2	110	150	200	2	
	perlitic (martensitic)		260	17	90	120	165	2	90	120	165	2	
K Cast iron with spheroidal graphite	ferritic		160	18	135	180	245	2	135	180	245	2	
	perlitic		250	19	105	140	190	2	105	140	190	2	
K Malleable cast iron	ferritic		130	20	150	200	270	2	150	200	270	2	
	perlitic		230	21	120	160	220	2	120	160	220	2	
N Aluminium wrought alloys	cannot be hardened		60	22									
	hardenable	hardened	100	23									
	$\leq 12\%$ Si, cannot be hardened		75	24									
	$\leq 12\%$ Si, hardenable	hardened	90	25									
N Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		130	26									
	$> 12\%$ Si, cannot be hardened												
D Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27									
	CuZn, CuSnZn		90	28									
	CuSn, Pb-free copper, electrolytic copper		100	29									
S Heat-resistant alloys	Fe-based alloys	annealed	200	30									
		hardened	280	31									
	Ni or Co base	annealed	250	32									
		hardened	350	33									
	Titanium alloys	cast	320	34									
		pure titanium		$R_m$ 400	35								
H Hardened steel	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36									
	hardened and tempered		55 HRC	37									
H Hard cast iron	hardened and tempered		60 HRC	38									
	cast		400	39									
H Hardened cast iron	hardened and tempered		55 HRC	40									
X Non-metallic materials	Thermoplasts			41									
	Thermosetting plastics			42									
	Plastic, glass-fibre reinforced GFRP			43									
	Plastic, carbon fibre reinforced CFRP			44									
	Graphite			45									
	Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.  
Feed rate recommendations on page B522.  
For examples of material for cutting tool groups view page D11.





## End mill – GM series

	Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
					5501R304GF 5601R304GF 5502R304GF 5602R304GF				GM-4F-G GM-4EFP				
					Slot milling		Shoulder milling		Slot milling		Shoulder milling		
					$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	
					$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	
					$3 \leq x \leq 20$	$0,8 \times D$		$3 \leq x \leq 20$	$0,8 \times D$				
					KMG303				KMG303				
					$a_e / D$				$a_e / D$				
					1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
<b>B</b> Turning	P Unalloyed steel	approx. 0,15 % C	annealed	125	1	155	200	265	2	150	200	270	2
		approx. 0,45 % C	annealed	190	2	150	190	255	2	145	190	260	2
		approx. 0,45 % C	tempered	250	3	110	140	190	2	105	140	190	2
		approx. 0,75 % C	annealed	270	4	95	120	160	2	90	120	165	2
		approx. 0,75 % C	tempered	300	5	90	110	150	2	85	110	150	2
P Low-alloyed steel		annealed	180	6	120	150	200	2	115	150	205	2	
		tempered	275	7	95	120	160	2	90	120	165	2	
		tempered	300	8	90	110	150	2	85	110	150	2	
		tempered	350	9	85	105	140	2	80	105	145	2	
P High-alloyed steel and high-alloyed tool steel		annealed	200	10	110	140	190	2	105	140	190	2	
		hardened and tempered	325	11	85	110	145	2	80	110	145	2	
M Stainless steel		ferritic/martensitic	annealed	200	12	50	65	85	2	50	65	90	2
		martensitic	tempered	240	13	45	60	75	2	45	60	80	2
		austenitic	quench hardened	180	14	55	70	95	2	55	70	95	2
		austenitic-ferritic		230	15	45	60	75	2	45	60	80	2
K Grey cast iron		perlite/ferritic		180	16	115	150	195	2	110	150	200	2
		perlite (martensitic)		260	17	95	120	160	2	90	120	165	2
K Cast iron with spheroidal graphite		ferritic		160	18	140	180	240	2	135	180	245	2
		perlite		250	19	110	140	190	2	105	140	190	2
K Malleable cast iron		ferritic		130	20	155	200	265	2	150	200	270	2
		perlite		230	21	125	160	215	2	120	160	220	2
N Aluminium wrought alloys		cannot be hardened		60	22								
		hardenable	hardened	100	23								
	N Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		75	24								
		$\leq 12\%$ Si, hardenable	hardened	90	25								
N Copper and copper alloys (bronze/brass)	$> 12\%$ Si, cannot be hardened		130	26									
		machining steel, PB > 1%		110	27								
		CuZn, CuSnZn		90	28								
S Heat-resistant alloys		Fe-based alloys	annealed	200	30								
			hardened	280	31								
		Ni or Co bass	annealed	250	32								
			hardened	350	33								
			cast	320	34								
S Titanium alloys		pure titanium		$R_m$ 400	35								
		$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36								
H Hardened steel		hardened and tempered		55 HRC	37								
		hardened and tempered		60 HRC	38								
H Hard cast iron		cast		400	39								
H Hardened cast iron		hardened and tempered		55 HRC	40								
X Non-metallic materials		Thermoplasts			41								
		Thermosetting plastics			42								
		Plastic, glass-fibre reinforced GFRP			43								
		Plastic, carbon fibre reinforced CFRP			44								
		Graphite			45								
		Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases.  
Feed rate recommendations on page B522.  
For examples of material for cutting tool groups view page D11.

Starting values for cutting speed $v_c$ [m/min]																							
GM-4FL-G GM-4EX-G				GM-6E				GM-6E 5589R45MGFR				5565R302GF 5565R302GM 5566R302GF				GM-2B GM-4B GM-2BS GM-2BP							
Slot milling		Shoulder milling				Shoulder milling				Shoulder milling		Slot milling		Shoulder milling									
$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max			$\emptyset$ [mm]	$a_e$ max			$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max								
$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$			$0 < x \leq 20$	$< 0,5 \times D$			$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$								
$3 \leq x \leq 20$	$0,8 \times D$											$3 \leq x \leq 20$	$0,8 \times D$										
KMG303				KMG303				KMG303				KMG303				KMG303							
$a_e / D$				$a_e / D$				$a_e / D$				$a_e / D$				$a_e / D$							
1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/10	1/20	f-group	1/1	1/10	1/20	f-group	1/1	1/10	1/20	f-group
130	170	230	2	-	-	270	2	-	-	230	2	-	250	280	5	-	250	280	5	-	250	280	5
125	165	220	2	-	-	260	2	-	-	220	2	-	240	270	5	-	240	270	5	-	240	270	5
95	120	165	2	-	-	190	2	-	-	165	2	-	175	200	5	-	175	200	5	-	175	200	5
80	105	140	2	-	-	165	2	-	-	140	2	-	150	170	5	-	150	170	5	-	150	170	5
75	95	130	2	-	-	150	2	-	-	130	2	-	140	155	5	-	140	155	5	-	140	155	5
100	130	175	2	-	-	205	2	-	-	175	2	-	190	210	5	-	190	210	5	-	190	210	5
80	105	140	2	-	-	165	2	-	-	140	2	-	150	170	5	-	150	170	5	-	150	170	5
75	95	130	2	-	-	150	2	-	-	130	2	-	140	155	5	-	140	155	5	-	140	155	5
70	90	120	2	-	-	145	2	-	-	120	2	-	130	150	5	-	130	150	5	-	130	150	5
95	120	165	2	-	-	190	2	-	-	165	2	-	175	200	5	-	175	200	5	-	175	200	5
70	95	125	2	-	-	145	2	-	-	125	2	-	135	150	5	-	135	150	5	-	135	150	5
45	55	75	2	-	-	90	2	-	-	75	2	-	80	90	5	-	80	90	5	-	80	90	5
40	50	65	2	-	-	80	2	-	-	65	2	-	70	80	5	-	70	80	5	-	70	80	5
45	60	80	2	-	-	95	2	-	-	80	2	-	85	100	5	-	85	100	5	-	85	100	5
40	50	65	2	-	-	80	2	-	-	65	2	-	70	80	5	-	70	80	5	-	70	80	5
95	125	170	2	-	-	200	2	-	-	170	2	-	185	205	5	-	185	205	5	-	185	205	5
80	105	140	2	-	-	165	2	-	-	140	2	-	150	170	5	-	150	170	5	-	150	170	5
120	155	210	2	-	-	245	2	-	-	210	2	-	225	255	5	-	225	255	5	-	225	255	5
95	120	165	2	-	-	190	2	-	-	165	2	-	175	200	5	-	175	200	5	-	175	200	5
130	170	230	2	-	-	270	2	-	-	230	2	-	250	280	5	-	250	280	5	-	250	280	5
105	140	185	2	-	-	220	2	-	-	185	2	-	200	225	5	-	200	225	5	-	200	225	5

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

## End mill – GM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]										
				GM-2BL GM-4BL GM-2BFP					GM-2R GM-4R					
									Slot milling		Shoulder milling			
									$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$		
					$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$						
					$3 \leq x \leq 20$	$0,8 \times D$								
					KMG303					KMG303				
					$a_e / D$					$a_e / D$				
					1/1	1/10	1/20	f-group	1/1	1/2	1/10	f-group		
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	-	220	250	5	160	215	275	2		
	approx. 0,45 % C	annealed	190	2	-	210	240	5	155	205	265	2		
	approx. 0,45 % C	tempered	250	3	-	155	175	5	115	155	195	2		
	approx. 0,75 % C	annealed	270	4	-	135	150	5	100	130	165	2		
	approx. 0,75 % C	tempered	300	5	-	125	140	5	90	120	155	2		
P Low-alloyed steel		annealed	180	6	-	165	190	5	120	165	210	2		
		tempered	275	7	-	135	150	5	100	130	165	2		
		tempered	300	8	-	125	140	5	90	120	155	2		
		tempered	350	9	-	115	130	5	85	115	145	2		
P High-alloyed steel and high-alloyed tool steel		annealed	200	10	-	155	175	5	115	155	195	2		
		hardened and tempered	325	11	-	120	135	5	85	115	150	2		
M Stainless steel	ferritic/martensitic	annealed	200	12	-	75	80	5	55	70	90	2		
	martensitic	tempered	240	13	-	65	70	5	45	65	80	2		
	austenitic	quench hardened	180	14	-	75	85	5	55	75	95	2		
	austenitic-ferritic		230	15	-	65	70	5	45	65	80	2		
K Grey cast iron	perlitic/ferritic		180	16	-	165	185	5	120	160	205	2		
	perlitic (martensitic)		260	17	-	135	150	5	100	130	165	2		
K Cast iron with spheroidal graphite	ferritic		160	18	-	200	225	5	145	195	250	2		
	perlitic		250	19	-	155	175	5	115	155	195	2		
K Malleable cast iron	ferritic		130	20	-	220	250	5	160	215	275	2		
	perlitic		230	21	-	180	200	5	130	175	220	2		
N Aluminium wrought alloys	cannot be hardened		60	22										
	hardenable	hardened	100	23										
	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24										
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25										
N Cast aluminium alloys	$> 12\% \text{ Si}$ , cannot be hardened		130	26										
	machining steel, PB> 1%		110	27										
	CuZn, CuSnZn		90	28										
S Copper and copper alloys (bronze/brass)	CuSn, Pb-free copper, electrolytic copper		100	29										
	S Heat-resistant alloys	Fe-based alloys	annealed	200	30									
		hardened	280	31										
	S Ni or Co bass	annealed	250	32										
hardened		350	33											
S Titanium alloys	cast	320	34											
	pure titanium		$R_m$ 400	35										
H Hardened steel	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36										
	hardened and tempered	55 HRC		37										
H Hard cast iron	hardened and tempered	60 HRC		38										
	cast	400		39										
H Hardened cast iron	hardened and tempered	55 HRC		40										
	Thermoplasts			41										
X Non-metallic materials	Thermosetting plastics			42										
	Plastic, glass-fibre reinforced GFRP			43										
	Plastic, carbon fibre reinforced CFRP			44										
	Graphite			45										
	Wood			46										

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.



## End mill – HM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]									
				HM-2E HM-2EP HM-2ES HM-4E					HM-2EFP HM-4EL HM-4EFP				
				Shoulder milling				Shoulder milling					
				$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_e$ max		
$0 < x \leq 20$		$0,05 \times D$		$0 < x \leq 20$		$0,05 \times D$							
KMG555					KMG555								
$a_e / D$		$a_e / D$		$a_e / D$		$a_e / D$							
1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group						
P Unalloyed steel	approx. 0,15 % C	annealed	125	1									
	approx. 0,45 % C	annealed	190	2									
	approx. 0,45 % C	tempered	250	3									
	approx. 0,75 % C	annealed	270	4									
	approx. 0,75 % C	tempered	300	5									
P Low-alloyed steel		annealed	180	6									
		tempered	275	7									
		tempered	300	8									
		tempered	350	9									
High-alloyed steel and high-alloyed tool steel		annealed	200	10									
		hardened and tempered	325	11									
M Stainless steel	ferritic/martensitic	annealed	200	12									
	martensitic	tempered	240	13									
	austenitic	quench hardened	180	14									
	austenitic-ferritic		230	15									
K Grey cast iron	perlitic/ferritic		180	16									
	perlitic (martensitic)		260	17									
K Cast iron with spheroidal graphite	ferritic		160	18									
	perlitic		250	19									
Malleable cast iron	ferritic		130	20									
	perlitic		230	21									
N Aluminium wrought alloys	cannot be hardened		60	22									
	hardenable	hardened	100	23									
	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24									
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25									
N Cast aluminium alloys	$> 12\% \text{ Si}$ , cannot be hardened		130	26									
	machining steel, PB> 1%		110	27									
	CuZn, CuSnZn		90	28									
S Copper and copper alloys (bronze/brass)	CuSn, Pb-free copper, electrolytic copper		100	29									
	Fe-based alloys	annealed	200	30									
		hardened	280	31									
	Ni or Co bass	annealed	250	32									
hardened		350	33										
Titanium alloys	cast	320	34										
	pure titanium		$R_m$ 400	35									
H Hardened steel	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36									
	hardened and tempered	55 HRC	37	55	100	125	3	50	95	115	3		
H Hard cast iron	hardened and tempered	60 HRC	38	55	95	120	3	50	95	110	3		
	cast	400	39	70	125	160	3	65	120	145	3		
H Hardened cast iron	hardened and tempered	55 HRC	40	55	100	125	3	50	95	115	3		
X Non-metallic materials	Thermoplasts			41									
	Thermosetting plastics			42									
	Plastic, glass-fibre reinforced GFRP			43									
	Plastic, carbon fibre reinforced CFRP			44									
	Graphite			45									
	Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.



## End mill – NM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
				5502R402NM NM-2E NM-4E NM-2EP				NM-2B NM-4BP				
				Slot milling		Shoulder milling						
				$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max					
	$0 < x < 12$	$0.5 \times D$	$0 < x \leq 20$	$< 0.5 \times D$								
	$12 \leq x \leq 20$	$1.0 \times D$										
				KMG309				KMG309				
				$a_e / D$		$a_e / D$		$a_e / D$		$a_e / D$		
				1/1	1/2	1/10	f-group	1/1	1/10	1/20	f-group	
P Unalloyed steel	approx. 0,15 % C	annealed	125	1								
	approx. 0,45 % C	annealed	190	2								
	approx. 0,45 % C	tempered	250	3								
	approx. 0,75 % C	annealed	270	4								
	approx. 0,75 % C	tempered	300	5								
P Low-alloyed steel		annealed	180	6								
		tempered	275	7								
		tempered	300	8								
		tempered	350	9								
High-alloyed steel and high-alloyed tool steel		annealed	200	10								
		hardened and tempered	325	11								
M Stainless steel	ferritic/martensitic	annealed	200	12								
		tempered	240	13								
	austenitic	quench hardened	180	14								
			230	15								
K Grey cast iron	perlitic/ferritic		180	16								
	perlitic (martensitic)		260	17								
K Cast iron with spheroidal graphite	ferritic		160	18								
	perlitic		250	19								
K Malleable cast iron	ferritic		130	20								
	perlitic		230	21								
N Aluminium wrought alloys	cannot be hardened		60	22	920	1100	1200	4	–	1400	1550	4
	hardenable	hardened	100	23	555	660	720	4	–	840	930	4
	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24	370	440	480	4	–	560	620	4
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25	460	550	600	4	–	700	775	4
	$> 12\% \text{ Si}$ , cannot be hardened		130	26	140	165	180	4	–	210	235	4
N Cast aluminium alloys	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24	370	440	480	4	–	560	620	4
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25	460	550	600	4	–	700	775	4
	$> 12\% \text{ Si}$ , cannot be hardened		130	26	140	165	180	4	–	210	235	4
D Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27	280	330	360	4	–	420	465	4
	CuZn, CuSnZn		90	28	325	385	420	4	–	490	545	4
	CuSn, Pb-free copper, electrolytic copper		100	29	280	330	360	4	–	420	465	4
S Heat-resistant alloys	Fe-based alloys	annealed	200	30								
		hardened	280	31								
	Ni or Co bass	annealed	250	32								
		hardened	350	33								
		cast	320	34								
Titanium alloys	pure titanium		$R_m$ 400	35								
	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36								
H Hardened steel		hardened and tempered	55 HRC	37								
		hardened and tempered	60 HRC	38								
H Hard cast iron		cast	400	39								
H Hardened cast iron		hardened and tempered	55 HRC	40								
X Non-metallic materials	Thermoplasts			41								
	Thermosetting plastics			42								
	Plastic, glass-fibre reinforced GFRP			43								
	Plastic, carbon fibre reinforced CFRP			44								
	Graphite			45								
	Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.





## End mill – AL series, ALP/ALG series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
				ALP-1EP				AL-1E AL-2E AL-3E (W) ALG-2E				
				Slot milling		Shoulder milling		Slot milling		Shoulder milling		
				$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	
				$0 < x < 12$	$0.5 \times D$	$0 < x \leq 20$	$< 0.5 \times D$	$0 < x < 12$	$0.5 \times D$	$0 < x \leq 20$	$< 0.5 \times D$	
				YK40F / KMD401				YK30F / YK40F				
				$a_e / D$				$a_e / D$				
				1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
P Unalloyed steel	approx. 0,15 % C	annealed	125	1								
	approx. 0,45 % C	annealed	190	2								
	approx. 0,45 % C	tempered	250	3								
	approx. 0,75 % C	annealed	270	4								
	approx. 0,75 % C	tempered	300	5								
Low-alloyed steel		annealed	180	6								
		tempered	275	7								
		tempered	300	8								
		tempered	350	9								
High-alloyed steel and high-alloyed tool steel		annealed	200	10								
		hardened and tempered	325	11								
M Stainless steel	ferritic/martensitic	annealed	200	12								
	martensitic	tempered	240	13								
	austenitic	quench hardened	180	14								
	austenitic-ferritic		230	15								
Grey cast iron	perlitic/ferritic		180	16								
	perlitic (martensitic)		260	17								
Cast iron with spheroidal graphite	ferritic		160	18								
	perlitic		250	19								
Malleable cast iron	ferritic		130	20								
	perlitic		230	21								
N Aluminium wrought alloys	cannot be hardened		60	22	300	345	375	12	920	1100	1200	4
	hardenable	hardened	100	23	250	290	315	12	555	660	720	4
	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24	250	280	315	12	370	440	480	4
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25	210	240	265	12	460	550	600	4
Cast aluminium alloys	$> 12\% \text{ Si}$ , cannot be hardened		130	26	180	210	225	12	140	165	180	4
	machining steel, PB> 1%		110	27	280	320	350	12	280	330	360	4
	CuZn, CuSnZn		90	28	310	360	390	12	325	385	420	4
Copper and copper alloys (bronze/brass)	CuSn, Pb-free copper, electrolytic copper		100	29	280	320	350	12	280	330	360	4
	S Heat-resistant alloys	Fe-based alloys	annealed	200	30							
hardened			280	31								
Ni or Co bass		annealed	250	32								
		hardened	350	33								
Titanium alloys	cast	320	34									
	pure titanium		$R_m$ 400	35								
Hardened steel		hardened and tempered	55 HRC	37								
		hardened and tempered	60 HRC	38								
Hard cast iron		cast	400	39								
Hardened cast iron		hardened and tempered	55 HRC	40								
X Non-metallic materials	Thermoplasts				41							
	Thermosetting plastics				42							
	Plastic, glass-fibre reinforced GFRP				43							
	Plastic, carbon fibre reinforced CFRP				44							
	Graphite				45							
	Wood				46							

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.



## End mill – AL series, ALP/ALG series

	Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
					ALG-2R (W)				AL-2RL-AIR AL-3RL-AIR				
					Slot milling		Shoulder milling		Slot milling		Shoulder milling		
					$\emptyset$ [mm]	$a_{p,max}$	$\emptyset$ [mm]	$a_{e,max}$	$\emptyset$ [mm]	$a_{p,max}$	$\emptyset$ [mm]	$a_{e,max}$	
					0 < x < 12	0.5xD	0 < x ≤ 20	< 0.5xD	0 < x < 12	0.5xD	0 < x ≤ 20	< 0.5xD	
					12 ≤ x ≤ 20	1,0xD			12 ≤ x ≤ 20	1,0xD			
					KMD401				YK40F				
					$a_e / D$				$a_e / D$				
					1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
<b>A</b> Turning	P Unalloyed steel	approx. 0,15 % C	annealed	125	1								
		approx. 0,45 % C	annealed	190	2								
		approx. 0,45 % C	tempered	250	3								
		approx. 0,75 % C	annealed	270	4								
		approx. 0,75 % C	tempered	300	5								
<b>B</b> Milling	P Low-alloyed steel		annealed	180	6								
			tempered	275	7								
			tempered	300	8								
			tempered	350	9								
<b>C</b> Drilling	P High-alloyed steel and high-alloyed tool steel		annealed	200	10								
			hardened and tempered	325	11								
<b>D</b> Technical Information	M Stainless steel	ferritic/martensitic	annealed	200	12								
			tempered	240	13								
		austenitic	quench hardened	180	14								
				230	15								
<b>E</b> Index	K Grey cast iron	perlitic/ferritic		180	16								
		perlitic (martensitic)		260	17								
	K Cast iron with spheroidal graphite	ferritic		160	18								
		perlitic		250	19								
	K Malleable cast iron	ferritic		130	20								
perlitic			230	21									
<b>F</b> Index	N Aluminium wrought alloys	cannot be hardened		60	22	1495	1795	1950	8	1035	1250	1350	8
		hardenable	hardened	100	23	900	1080	1170	8	625	750	810	8
	N Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24	600	725	780	8	415	500	540	8
		≤ 12 % Si, hardenable	hardened	90	25	750	900	975	8	520	625	675	8
		> 12 % Si, cannot be hardened		130	26	230	275	295	8	160	190	205	8
N Copper and copper alloys (bronze/brass)	machining steel, PB > 1%			110	27	450	540	585	8	315	375	405	8
	CuZn, CuSnZn			90	28	530	635	685	8	365	440	475	8
	CuSn, Pb-free copper, electrolytic copper			100	29	450	540	585	8	315	375	405	8
<b>G</b> Index	S Heat-resistant alloys	Fe-based alloys	annealed	200	30								
			hardened	280	31								
		Ni or Co bass	annealed	250	32								
			hardened	350	33								
	S Titanium alloys	pure titanium		R <sub>m</sub> 400	35								
α and β alloys		hardened	R <sub>m</sub> 1050	36									
<b>H</b> Index	H Hardened steel		hardened and tempered	55 HRC	37								
			hardened and tempered	60 HRC	38								
	H Hard cast iron		cast	400	39								
<b>X</b> Index	X Non-metallic materials		hardened and tempered	55 HRC	40								
					41								
					42								
					43								
					44								
					45								
			46										

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases. Feed rate recommendations on page B522. For examples of material for cutting tool groups view page D11.



## End mill – TM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]									
				TM-4R / TM-4RP TM-5R / TM-5RP TM-7R / TM-7RP TM-9R / TM-9RP				TM-4B / TM-4BP TM-5B / TM-5BP					
				Slot milling		Shoulder milling							
				$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$						
				$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,3 \times D$						
P Unalloyed steel Low-alloyed steel High-alloyed steel and high-alloyed tool steel	approx. 0,15 % C	annealed	125	1									
	approx. 0,45 % C	annealed	190	2									
	approx. 0,45 % C	tempered	250	3									
	approx. 0,75 % C	annealed	270	4									
	approx. 0,75 % C	tempered	300	5									
		annealed	180	6									
		tempered	275	7									
		tempered	300	8									
		tempered	350	9									
		annealed	200	10									
		hardened and tempered	325	11									
M Stainless steel	ferritic/martensitic	annealed	200	12									
	martensitic	tempered	240	13									
	austenitic	quench hardened	180	14									
	austenitic-ferritic		230	15									
K Grey cast iron Cast iron with spheroidal graphite Malleable cast iron	perlitic/ferritic		180	16									
	perlitic (martensitic)		260	17									
	ferritic		160	18									
	perlitic		250	19									
	ferritic		130	20									
	perlitic		230	21									
N Aluminium wrought alloys Cast aluminium alloys Copper and copper alloys (bronze/brass)	cannot be hardened		60	22									
	hardenable	hardened	100	23									
	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24									
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25									
	$> 12\% \text{ Si}$ , cannot be hardened		130	26									
	machining steel, PB> 1%		110	27									
S Heat-resistant alloys Titanium alloys	CuZn, CuSnZn		90	28									
	CuSn, Pb-free copper, electrolytic copper		100	29									
	Fe-based alloys	annealed	200	30	45	55	85	10	–	85	90	10	
		hardened	280	31	25	30	45	10	–	45	50	10	
		Ni or Co bass	annealed	250	32	45	55	85	10	–	85	90	10
			hardened	350	33	25	30	45	10	–	45	50	10
	cast	320	34	25	30	45	10	–	45	50	10		
	pure titanium		$R_m$ 400	35	75	90	135	10	–	135	145	10	
$\alpha$ and $\beta$ alloys		hardened	$R_m$ 1050	36	45	55	85	10	–	85	90	10	
H Hardened steel Hard cast iron Hardened cast iron		hardened and tempered	55 HRC	37									
		hardened and tempered	60 HRC	38									
		cast	400	39									
		hardened and tempered	55 HRC	40									
X Non-metallic materials	Thermoplasts			41									
	Thermosetting plastics			42									
	Plastic, glass-fibre reinforced GFRP			43									
	Plastic, carbon fibre reinforced CFRP			44									
	Graphite			45									
	Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.  
Feed rate recommendations on page B522.  
For examples of material for cutting tool groups view page D11.



## End mill – PM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]									
				PM-2E PM-2ES / PM-2EP / PM-2RP PM-4E PM-4E-G				PM-4EL PM-4EL-G PM-4EX-G					
				Slot milling		Shoulder milling		Slot milling		Shoulder milling			
				$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$	$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$		
0 < x < 3		0 < x ≤ 20		0 < x < 3		0 < x ≤ 20							
3 ≤ x < 6		0,3xD		3 ≤ x < 6		0,3xD							
6 ≤ x ≤ 20		0,5xD		6 ≤ x ≤ 20		0,5xD							
				KMG405				KMG405					
				$a_e / D$				$a_e / D$					
P	Unalloyed steel	approx. 0,15 % C	annealed	125	1	165	220	300	1	140	190	255	1
		approx. 0,45 % C	annealed	190	2	160	210	285	1	135	185	245	1
		approx. 0,45 % C	tempered	250	3	120	155	210	1	100	135	180	1
		approx. 0,75 % C	annealed	270	4	100	135	180	1	85	115	155	1
		approx. 0,75 % C	tempered	300	5	95	125	165	1	80	105	145	1
	Low-alloyed steel		annealed	180	6	125	165	225	1	110	145	195	1
			tempered	275	7	100	135	180	1	85	115	155	1
			tempered	300	8	95	125	165	1	80	105	145	1
			tempered	350	9	90	115	160	1	75	100	135	1
	High-alloyed steel and high-alloyed tool steel		annealed	200	10	120	155	210	1	100	135	180	1
		hardened and tempered	325	11	90	120	160	1	75	105	140	1	
M	Stainless steel	ferritic/martensitic	annealed	200	12	55	75	100	1	45	65	85	1
		martensitic	tempered	240	13	50	65	85	1	40	55	75	1
		austenitic	quench hardened	180	14	60	75	105	1	50	65	90	1
		austenitic-ferritic		230	15	50	65	85	1	40	55	75	1
K	Grey cast iron	perlite/ferritic		180	16	125	165	220	1	105	140	190	1
		perlite (martensitic)		260	17	100	135	180	1	85	115	155	1
	Cast iron with spheroidal graphite	ferritic		160	18	150	200	270	1	130	175	230	1
		perlite		250	19	120	155	210	1	100	135	180	1
	Malleable cast iron	ferritic		130	20	165	220	300	1	145	190	255	1
		perlite		230	21	135	180	240	1	115	155	205	1
N	Aluminium wrought alloys	cannot be hardened		60	22								
		hardenable	hardened	100	23								
	Cast aluminium alloys	≤ 12% Si, cannot be hardened		75	24								
		≤ 12% Si, hardenable	hardened	90	25								
		> 12% Si, cannot be hardened		130	26								
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%			110	27							
		CuZn, CuSnZn			90	28							
CuSn, Pb-free copper, electrolytic copper			100	29									
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30								
			hardened	280	31								
		Ni or Co bass	annealed	250	32								
			hardened	350	33								
	Titanium alloys	cast	320	34									
		pure titanium		R <sub>m</sub> 400	35								
α and β alloys	hardened	R <sub>m</sub> 1050	36										
H	Hardened steel	hardened and tempered	55 HRC	37	80	105	140	1	65	90	120	1	
		hardened and tempered	60 HRC	38	–	–	–	–	–	–	–	–	
	Hard cast iron	cast	400	39	105	140	185	1	85	120	160	1	
	Hardened cast iron	hardened and tempered	55 HRC	40	–	–	–	–	–	–	–	–	
X	Non-metallic materials	Thermoplasts			41								
		Thermosetting plastics			42								
		Plastic, glass-fibre reinforced GFRP			43								
		Plastic, carbon fibre reinforced CFRP			44								
		Graphite			45								
		Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions.

The values have to be adapted in individual cases.

Feed rate recommendations on page B522.

For examples of material for cutting tool groups view page D11.





## End mill – PM series, VPM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
				PM-2R PM-4R				PM-4RL				
				Slot milling		Shoulder milling		Slot milling		Shoulder milling		
				$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	
				$0 < x < 3$	$0,15 \times D$	$0 < x \leq 20$	$0,15 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x \leq 20$	$0,15 \times D$	
				$3 \leq x < 6$	$0,3 \times D$			$3 \leq x < 6$	$0,3 \times D$			
				$6 \leq x \leq 20$	$0,5 \times D$			$6 \leq x \leq 20$	$0,5 \times D$			
				KMG405				KMG405				
				$a_e / D$				$a_e / D$				
				1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
P Unalloyed steel Low-alloyed steel High-alloyed steel and high-alloyed tool steel	approx. 0,15 % C annealed approx. 0,45 % C annealed approx. 0,45 % C tempered approx. 0,75 % C annealed approx. 0,75 % C tempered	125	1	165	220	300	1	150	200	265	1	
		190	2	160	210	285	1	145	190	255	1	
		250	3	120	155	210	1	105	140	190	1	
		270	4	100	135	180	1	90	120	160	1	
		300	5	95	125	165	1	85	110	150	1	
	annealed tempered tempered tempered	180	6	125	165	225	1	115	150	200	1	
		275	7	100	135	180	1	90	120	160	1	
		300	8	95	125	165	1	85	110	150	1	
	annealed hardened and tempered	200	10	120	155	210	1	105	140	190	1	
		325	11	90	120	160	1	80	110	145	1	
M Stainless steel	ferritic/martensitic annealed	200	12	55	75	100	1	50	65	85	1	
	martensitic tempered	240	13	50	65	85	1	45	60	75	1	
	austenitic quench hardened	180	14	60	75	105	1	55	70	95	1	
	austenitic-ferritic	230	15	50	65	85	1	45	60	75	1	
K Grey cast iron Cast iron with spheroidal graphite Malleable cast iron	perlitic/ferritic	180	16	125	165	220	1	110	150	195	1	
	perlitic (martensitic)	260	17	100	135	180	1	90	120	160	1	
	ferritic	160	18	150	200	270	1	135	180	240	1	
	perlitic	250	19	120	155	210	1	105	140	190	1	
	ferritic	130	20	165	220	300	1	150	200	265	1	
	perlitic	230	21	135	180	240	1	120	160	215	1	
N Aluminium wrought alloys Cast aluminium alloys Copper and copper alloys (bronze/brass)	cannot be hardened	60	22									
	hardenable hardened	100	23									
	$\leq 12\%$ Si, cannot be hardened	75	24									
	$\leq 12\%$ Si, hardenable hardened	90	25									
	$> 12\%$ Si, cannot be hardened	130	26									
	machining steel, PB> 1% CuZn, CuSnZn CuSn, Pb-free copper, electrolytic copper	110 90 100	27 28 29									
S Heat-resistant alloys Titanium alloys	Fe-based alloys annealed hardened	200 280	30 31									
	Ni or Co bass annealed hardened cast	250	32									
		350	33									
		320	34									
	pure titanium $R_m$ 400		35									
	$\alpha$ and $\beta$ alloys hardened $R_m$ 1050		36									
H Hardened steel Hard cast iron Hardened cast iron	hardened and tempered 55 HRC		37	85	110	145	1	70	95	125	1	
	hardened and tempered 60 HRC		38	-	-	-	-	-	-	-	-	
	cast 400		39	115	145	190	1	95	125	165	1	
	hardened and tempered 55 HRC		40	-	-	-	-	-	-	-	-	
X Non-metallic materials	Thermoplasts		41									
	Thermosetting plastics		42									
	Plastic, glass-fibre reinforced GFRP		43									
	Plastic, carbon fibre reinforced CFRP		44									
	Graphite		45									
	Wood		46									

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.  
Feed rate recommendations on page B522.  
For examples of material for cutting tool groups view page D11.

Starting values for cutting speed $v_c$ [m/min]									
PM-4H PM-4HL				VPM-4E					
		Shoulder milling							
		$\varnothing$ [mm]	$a_{e \max}$						
		$0 < x \leq 20$	$0.15 \times D$	$0 < x < 3$	$0.5 \times D$	$0 < x < 3$	$0.15 \times D$		
				$3 \leq x < 12$	$1.5 \times D$	$3 \leq x < 20$	$0.5 \times D$		
				$12 \leq x \leq 20$	$2.0 \times D$				
KMG405				KMG406					
$a_e / D$				$a_e / D$					
1/1	1/2	1/10	f-group	1/1	1/2	1/10			
-	210	270	6	230	280	350	9		
-	200	260	6	220	270	340	9		
-	150	190	6	160	190	250	9		
-	130	165	6	140	160	210	9		
-	120	150	6	130	150	200	9		
-	160	205	6	180	215	270	9		
-	130	165	6	130	170	220	9		
-	120	150	6	125	150	190	9		
-	110	145	6	120	150	190	9		
-	150	190	6	160	190	250	9		
-	115	145	6	115	140	190	9		
-	70	90	6	70	90	110	9		
-	60	80	6	60	80	100	9		
-	75	95	6	75	90	120	9		
-	60	80	6	65	80	100	9		
-	155	200	6	160	200	260	9		
-	130	165	6	140	170	220	9		
-	190	245	6	215	250	330	9		
-	150	190	6	160	200	250	9		
-	210	270	6	230	280	360	9		
-	170	220	6	180	230	290	9		
-	100	125	1	100	120	150	9		
-	-	-	-	-	-	-	-		
-	130	165	1	110	150	180	9		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-		

**A**

Turning

---

**B**

Milling

---

**C**

Drilling

---

**D**

Technical Information

---

**E**

Index

## End mills – EPM series

	Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
					EPM-2E EPM-4E				EPM-2EL EPM-4EL				
					Slot milling		Shoulder milling		Slot milling		Shoulder milling		
					$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$	$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$	
					$0 < x < 3$	$0,15 \times D$	$0 < x \leq 20$	$0,15 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x \leq 20$	$0,15 \times D$	
					$3 \leq x < 6$	$0,3 \times D$			$3 \leq x < 6$	$0,3 \times D$			
					$6 \leq x \leq 20$	$0,5 \times D$			$6 \leq x \leq 20$	$0,5 \times D$			
					KMG406				KMG406				
					$a_e / D$				$a_e / D$				
					1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
A Turning	P Unalloyed steel	approx. 0,15 % C	annealed	125	1	165	220	300	1	140	190	255	1
		approx. 0,45 % C	annealed	190	2	160	210	285	1	135	185	245	1
		approx. 0,45 % C	tempered	250	3	120	155	210	1	100	135	180	1
		approx. 0,75 % C	annealed	270	4	100	135	180	1	85	115	155	1
		approx. 0,75 % C	tempered	300	5	95	125	165	1	80	105	145	1
		Low-alloyed steel	annealed	180	6	125	165	225	1	110	145	195	1
			tempered	275	7	100	135	180	1	85	115	155	1
			tempered	300	8	95	125	165	1	80	105	145	1
			tempered	350	9	90	115	160	1	75	100	135	1
		High-alloyed steel and high-alloyed tool steel	annealed	200	10	120	155	210	1	100	135	180	1
hardened and tempered	325		11	90	120	160	1	75	105	140	1		
C Milling	M Stainless steel	ferritic/martensitic	annealed	200	12	55	75	100	1	45	65	85	1
		martensitic	tempered	240	13	50	65	85	1	40	55	75	1
		austenitic	quench hardened	180	14	60	75	105	1	50	65	90	1
		austenitic-ferritic		230	15	50	65	85	1	40	55	75	1
D Drilling	K Grey cast iron	perlitic/ferritic		180	16	125	165	220	1	105	140	190	1
		perlitic (martensitic)		260	17	100	135	180	1	85	115	155	1
	Cast iron with spheroidal graphite	ferritic		160	18	150	200	270	1	130	175	230	1
		perlitic		250	19	120	155	210	1	100	135	180	1
	Malleable cast iron	ferritic		130	20	165	220	300	1	145	190	255	1
		perlitic		230	21	135	180	240	1	115	155	205	1
E Technical Information	N Aluminium wrought alloys	cannot be hardened		60	22								
		hardenable	hardened	100	23								
	Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		75	24								
		$\leq 12\%$ Si, hardenable	hardened	90	25								
		$> 12\%$ Si, cannot be hardened		130	26								
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%			110	27							
		CuZn, CuSnZn			90	28							
CuSn, Pb-free copper, electrolytic copper			100	29									
S Heat-resistant alloys	Fe-based alloys	annealed		200	30								
		hardened		280	31								
	Ni or Co bass	annealed		250	32								
		hardened		350	33								
		cast		320	34								
	Titanium alloys	pure titanium		$R_m$ 400	35								
$\alpha$ and $\beta$ alloys		hardened	$R_m$ 1050	36									
H Hardened steel	Hardened steel	hardened and tempered		55 HRC	37	80	105	140	1	65	90	120	1
		hardened and tempered		60 HRC	38	-	-	-	-	-	-	-	
	Hard cast iron	cast	400	39	105	140	185	1	85	120	160	1	
	Hardened cast iron	hardened and tempered	55 HRC	40									
X Index	Non-metallic materials	Thermoplasts			41								
		Thermosetting plastics			42								
		Plastic, glass-fibre reinforced GFRP			43								
		Plastic, carbon fibre reinforced CFRP			44								
		Graphite			45								
		Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases. Feed rate recommendations on page B522. For examples of material for cutting tool groups view page D11.



## End mill – HPC series, UM/UMC series, VSM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]									
				5501R38414GM (-R) 5502R38414GM (-R) 5602R38414GM (-R)					5501R38414GM 5502R38414GM 5602R38414GM				
				Slot milling		Shoulder milling			Slot milling		Shoulder milling		
				$\varnothing$ [mm]	$a_{p \max}$	$\varnothing$ [mm]	$a_{e \max}$	$\varnothing$ [mm]	$a_{p \max}$	$\varnothing$ [mm]	$a_{e \max}$	$\varnothing$ [mm]	$a_{e \max}$
				$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	$3 \leq x < 12$	$0,7 \times D$
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	250	300	380	9	230	280	350	9	
	approx. 0,45 % C	annealed	190	2	240	285	365	9	220	270	340	9	
	approx. 0,45 % C	tempered	250	3	175	210	270	9	160	190	250	9	
	approx. 0,75 % C	annealed	270	4	150	180	230	9	140	160	210	9	
	approx. 0,75 % C	tempered	300	5	140	165	210	9	130	150	200	9	
	Low-alloyed steel		annealed	180	6	190	225	285	9	180	215	270	9
			tempered	275	7	150	180	230	9	130	170	220	9
			tempered	300	8	140	165	210	9	125	150	190	9
			tempered	350	9	130	160	200	9	120	150	190	9
	High-alloyed steel and high-alloyed tool steel		annealed	200	10	175	210	270	9	160	190	250	9
		hardened and tempered	325	11	135	160	205	9	115	140	190	9	
M Stainless steel	ferritic/martensitic	annealed	200	12	80	100	125	9	70	90	110	9	
	martensitic	tempered	240	13	70	85	110	9	60	80	100	9	
	austenitic	quench hardened	180	14	85	105	130	9	75	90	120	9	
	austenitic-ferritic		230	15	70	85	110	9	65	80	100	9	
K Grey cast iron	perlitic/ferritic		180	16	185	220	280	9	160	200	260	9	
	perlitic (martensitic)		260	17	150	180	230	9	140	170	220	9	
	Cast iron with spheroidal graphite	ferritic		160	18	225	270	345	9	215	250	330	9
		perlitic		250	19	175	210	270	9	160	200	250	9
	Malleable cast iron	ferritic		130	20	250	300	380	9	230	280	360	9
		perlitic		230	21	200	240	305	9	180	230	290	9
N Aluminium wrought alloys	cannot be hardened		60	22									
	hardenable	hardened	100	23									
	Cast aluminium alloys	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24								
		$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25								
		$> 12\% \text{ Si}$ , cannot be hardened		130	26								
Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27									
	CuZn, CuSnZn		90	28									
	CuSn, Pb-free copper, electrolytic copper		100	29									
S Heat-resistant alloys	Fe-based alloys	annealed	200	30									
		hardened	280	31									
	Ni or Co bass	annealed	250	32									
		hardened	350	33									
		cast	320	34									
	Titanium alloys	pure titanium	$R_m$ 400	35									
$\alpha$ and $\beta$ alloys		hardened	$R_m$ 1050	36									
H Hardened steel		hardened and tempered	55 HRC	37	115	140	175	9	100	120	150	9	
		hardened and tempered	60 HRC	38	-	-	-	-	-	-	-	-	
	Hard cast iron	cast	400	39	135	165	205	9	110	150	180	9	
	Hardened cast iron	hardened and tempered	55 HRC	40	-	-	-	-	-	-	-	-	
X Non-metallic materials	Thermoplasts			41									
	Thermosetting plastics			42									
	Plastic, glass-fibre reinforced GFRP			43									
	Plastic, carbon fibre reinforced CFRP			44									
	Graphite			45									
	Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.



## Deburring cutters – FM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]					
				5501 / 5601 5501 / 5601 5601					
				KMG303					
				$a_e / D$				f-group	
				1/1	1/2	1/10	f-group		
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	-	-	230	11	
	approx. 0,45 % C	annealed	190	2	-	-	220	11	
	approx. 0,45 % C	tempered	250	3	-	-	165	11	
	approx. 0,75 % C	annealed	270	4	-	-	140	11	
	approx. 0,75 % C	tempered	300	5	-	-	130	11	
P Low-alloyed steel		annealed	180	6	-	-	175	11	
		tempered	275	7	-	-	140	11	
		tempered	300	8	-	-	130	11	
		tempered	350	9	-	-	120	11	
P High-alloyed steel and high-alloyed tool steel		annealed	200	10	-	-	165	11	
		hardened and tempered	325	11	-	-	125	11	
M Stainless steel	ferritic/martensitic	annealed	200	12	-	-	75	11	
	martensitic	tempered	240	13	-	-	65	11	
	austenitic	quench hardened	180	14	-	-	80	11	
	austenitic-ferritic		230	15	-	-	65	11	
K Grey cast iron	perlitic/ferritic		180	16	-	-	170	11	
	perlitic (martensitic)		260	17	-	-	140	11	
K Cast iron with spheroidal graphite	ferritic		160	18	-	-	210	11	
	perlitic		250	19	-	-	165	11	
K Malleable cast iron	ferritic		130	20	-	-	230	11	
	perlitic		230	21	-	-	185	11	
N Aluminium wrought alloys	cannot be hardened		60	22	-	-	1200	11	
	hardenable	hardened	100	23	-	-	720	11	
	≤ 12 % Si, cannot be hardened		75	24	-	-	480	11	
	≤ 12 % Si, hardenable	hardened	90	25	-	-	600	11	
N Cast aluminium alloys	> 12 % Si, cannot be hardened		130	26	-	-	180	11	
	machining steel, PB> 1%		110	27	-	-	360	11	
	CuZn, CuSnZn		90	28	-	-	420	11	
N Copper and copper alloys (bronze/brass)	CuSn, Pb-free copper, electrolytic copper		100	29	-	-	360	11	
	S Heat-resistant alloys	Fe-based alloys	annealed	200	30				
		hardened	280	31					
S Ni or Co bass	annealed	250	32						
	hardened	350	33						
	cast	320	34						
S Titanium alloys	pure titanium		R <sub>m</sub> 400	35					
	α and β alloys	hardened	R <sub>m</sub> 1050	36					
H Hardened steel		hardened and tempered	55 HRC	37					
		hardened and tempered	60 HRC	38					
H Hard cast iron		cast	400	39					
H Hardened cast iron		hardened and tempered	55 HRC	40					
X Non-metallic materials	Thermoplasts				41				
	Thermosetting plastics				42				
	Plastic, glass-fibre reinforced GFRP				43				
	Plastic, carbon fibre reinforced CFRP				44				
	Graphite				45				
	Wood				46				

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.





## End mills – QCH series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]										
				Q**-PM-4E Q**-PM-4R Q**-VPM-4E					Q**PM-2B Q**PM-4B					
				Slot milling		Shoulder milling								
				$\varnothing$ [mm]	$a_{p\max}$	$\varnothing$ [mm]	$a_{e\max}$	$f$ [mm]	$v_c$ [m/min]	$v_c$ [m/min]	$v_c$ [m/min]	$v_c$ [m/min]	$v_c$ [m/min]	$v_c$ [m/min]
				$0 < x < 3$	$0,3 \times D$	$0 < x < 20$	$0,15 \times D$							
				KMG405					KMG405					
				$a_e / D$					$a_e / D$					
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	1/1	1/2	1/10	$f$ -group	1/1	1/2	1/10	$f$ -group		
	approx. 0,45 % C	annealed	190	2	165	220	300	1	–	270	300	5		
	approx. 0,45 % C	tempered	250	3	160	210	285	1	–	260	285	5		
	approx. 0,75 % C	annealed	270	4	120	155	210	1	–	190	210	5		
	approx. 0,75 % C	tempered	300	5	100	135	180	1	–	165	180	5		
P Low-alloyed steel		annealed	180	6	95	125	165	1	–	150	165	5		
		tempered	275	7	125	165	225	1	–	205	225	5		
		tempered	300	8	100	135	180	1	–	165	180	5		
		tempered	350	9	95	125	165	1	–	150	165	5		
P High-alloyed steel and high-alloyed tool steel		annealed	200	10	90	115	160	1	–	145	160	5		
		hardened and tempered	325	11	120	155	210	1	–	190	210	5		
M Stainless steel	ferritic/martensitic	annealed	200	12	90	120	160	1	–	145	160	5		
	martensitic	tempered	240	13	55	75	100	1	–	90	100	5		
	austenitic	quench hardened	180	14	50	65	85	1	–	80	85	5		
	austenitic-ferritic		230	15	60	75	105	1	–	95	105	5		
K Grey cast iron	perlitic/ferritic		180	16	50	65	85	1	–	80	85	5		
	perlitic (martensitic)		260	17	125	165	220	1	–	200	220	5		
K Cast iron with spheroidal graphite	ferritic		160	18	100	135	180	1	–	165	180	5		
	perlitic		250	19	150	200	270	1	–	245	270	5		
K Malleable cast iron	ferritic		130	20	120	155	210	1	–	190	210	5		
	perlitic		230	21	165	220	300	1	–	270	300	5		
N Aluminium wrought alloys	cannot be hardened		60	22	135	180	240	1	–	220	240	5		
	hardenable	hardened	100	23										
	$\leq 12\%$ Si, cannot be hardened		75	24										
	$\leq 12\%$ Si, hardenable	hardened	90	25										
N Cast aluminium alloys	$> 12\%$ Si, cannot be hardened		130	26										
	machining steel, PB $>$ 1%		110	27										
	CuZn, CuSnZn		90	28										
S Copper and copper alloys (bronze/brass)	CuSn, Pb-free copper, electrolytic copper		100	29										
	Heat-resistant alloys	Fe-based alloys	annealed	200	30									
		hardened	280	31										
	Ni or Co bass	annealed	250	32										
hardened		350	33											
Titanium alloys	cast	320	34											
	pure titanium		$R_m$ 400	35										
H Hardened steel	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36										
	hardened and tempered	55 HRC	37	–	–	–	–							
H Hard cast iron	hardened and tempered	60 HRC	38	80	105	140	1							
	cast	400	39	–	–	–	–							
H Hardened cast iron	hardened and tempered	55 HRC	40	105	140	185	1							
X Non-metallic materials	Thermoplasts			41										
	Thermosetting plastics			42										
	Plastic, glass-fibre reinforced GFRP			43										
	Plastic, carbon fibre reinforced CFRP			44										
	Graphite			45										
	Wood			46										

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B522.  
 For examples of material for cutting tool groups view page D11.



## Recommended feed rate

### Solid carbide milling group 1 – Square shoulder mills PM series, QCH series, EPM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>P</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,10	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,20	
<b>M</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,08	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,11	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,16	
<b>K</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,10		
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
<b>H</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,08		
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,16	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 2 – Square shoulder mills GM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>P</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	
<b>M</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,07		
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15	
<b>K</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 3 – Square shoulder mills HM series, QCH series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>H</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 4 – Square shoulder mills AL series, NM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>N</b>	1/1	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,09	0,11	0,11	0,12	0,12	0,14	
	3/4	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	
	1/10	0,03	0,06	0,06	0,06	0,06	0,06	0,09	0,09	0,12	0,19	0,22	0,22	0,25	0,25	0,28	
	1/20	0,04	0,08	0,08	0,08	0,08	0,08	0,12	0,12	0,16	0,23	0,27	0,27	0,31	0,31	0,35	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

## Recommended feed rate

### Solid carbide milling group 5 – Ball nose cutters GM series, QCH series, EPM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>P</b>	1/1																
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
	1/20	0,03	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,11	0,17	0,20	0,20	0,23	0,23	0,25	
<b>M</b>	1/1																
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/20	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	
<b>K</b>	1/1																
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
	1/20	0,03	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,11	0,17	0,20	0,20	0,23	0,23	0,25	
<b>H</b>	1/1																
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/20	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 6 – High feed mills PM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]							
		Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	
<b>P</b>	1/1								
	1/10								
	1/20	0,15	0,25	0,28	0,33	0,44	0,55	0,66	
<b>M</b>	1/1								
	1/10								
	1/20	0,12	0,22	0,25	0,30	0,41	0,52	0,63	
<b>K</b>	1/1								
	1/10								
	1/20	0,15	0,25	0,28	0,33	0,44	0,55	0,66	
<b>H</b>	1/1								
	1/10								
	1/20	0,12	0,22	0,25	0,30	0,41	0,52	0,63	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 7 – Ball nose cutters HM series, QCH series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>H</b>	1/1																
	1/2	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 8 – High feed mills AL series, ALP/ALG series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]							
		Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20
<b>N</b>	1/1	0,04	0,05	0,08	0,09	0,11	0,13	0,16	0,18
	3/4	0,05	0,07	0,10	0,12	0,14	0,16	0,20	0,23
	1/10	0,08	0,11	0,16	0,19	0,22	0,25	0,31	0,36

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

**A**

## Recommended feed rate

Turning

### Solid carbide milling group 9 – Square shoulder mills UM/UMC series, VPM series HSC/HPC

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]																	
		Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20								
<b>P</b>	1/1	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08								
	1/2	0,08	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10	0,10								
	1/10	0,14	0,14	0,16	0,18	0,22	0,25	0,27	0,3	0,32	0,36								
<b>M</b>	1/1	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,06	0,06	0,06								
	1/2	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08								
	1/10	0,10	0,10	0,10	0,12	0,12	0,14	0,16	0,16	0,18	0,18								
<b>K</b>	1/1	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08								
	1/2	0,08	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10	0,10								
	1/10	0,14	0,14	0,16	0,18	0,22	0,25	0,27	0,3	0,32	0,36								
<b>H</b>	1/1	0,045	0,045	0,045	0,053	0,053	0,053	0,053	0,06	0,06	0,06								
	1/2	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08								
	1/10	0,10	0,10	0,10	0,12	0,12	0,14	0,16	0,16	0,18	0,18								

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

**B**

Milling

### Solid carbide milling group 10 – Square shoulder mills VSM series, TM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]																	
		Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20								
<b>P</b>	1/1	0,03	0,04	0,05	0,05	0,05	0,05	0,06	0,06	0,07	0,08								
	1/2	0,04	0,06	0,07	0,07	0,07	0,07	0,08	0,09	0,10	0,11								
	1/10	0,05	0,08	0,09	0,09	0,09	0,09	0,11	0,12	0,14	0,15								
<b>M</b>	1/1	0,02	0,03	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,06								
	1/2	0,03	0,05	0,05	0,05	0,05	0,05	0,06	0,07	0,08	0,08								
	1/10	0,04	0,06	0,07	0,07	0,07	0,07	0,08	0,09	0,10	0,11								
<b>S</b>	1/1	0,02	0,03	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,06								
	1/2	0,03	0,05	0,05	0,05	0,05	0,05	0,06	0,07	0,08	0,08								
	1/10	0,04	0,06	0,07	0,07	0,07	0,07	0,08	0,09	0,10	0,11								

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

**C**

Drilling

**D**

Technical Information

### Solid carbide milling group 11 – Deburring cutters FM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]																			
		Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20									
<b>P</b>	1/1																				
	1/2																				
	1/10	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09									
<b>M</b>	1/1																				
	1/2																				
	1/10	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07									
<b>K</b>	1/1																				
	1/2																				
	1/10	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09									
<b>N</b>	1/1																				
	1/2																				
	1/10	0,03	0,03	0,05	0,05	0,06	0,09	0,11	0,11	0,12	0,12	0,14									

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

**E**

Index

**Recommended feed rate**

**Solid carbide milling group 12 – ALP-1EP single-edged cutters**

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]																
		Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10										
<b>N</b>	1/1	0,03	0,05	0,07	0,09	0,11	0,14	0,18										
	1/2	0,04	0,07	0,10	0,13	0,15	0,20	0,25										
	1/10	0,06	0,11	0,15	0,19	0,23	0,29	0,38										

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

**A**

Notes

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index

## Technical information

Trouble shooting – milling

B528

Technical information – milling

B529-B540

Special tools – milling

B541

# B

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical  
Information


**E**

Index



## Trouble shooting – indexable milling

Fig.	Type of wear	Effects	Reason	Countermeasure
1+2	Flank wear	<ul style="list-style-type: none"> <li>– Bad surface quality and dimensional stability</li> <li>– Increase of cutting force</li> </ul>	<ul style="list-style-type: none"> <li>– Grade not wear-resistant enough</li> <li>– Cutting speed too high</li> <li>– Clearance angle too small</li> <li>– Feed rate too low</li> </ul>	<ul style="list-style-type: none"> <li>– Grade with higher wear-resistance</li> <li>– Reduce cutting speed</li> <li>– Increase clearance angle</li> <li>– Reduce feed rate</li> </ul>
3	Crater wear	<ul style="list-style-type: none"> <li>– Bad surface quality and chip control</li> </ul>	<ul style="list-style-type: none"> <li>– Grade not wear-resistant enough</li> <li>– Cutting speed too high</li> <li>– Feed rate too low</li> </ul>	<ul style="list-style-type: none"> <li>– Grade with higher wear-resistance</li> <li>– Reduce cutting speed</li> <li>– Reduce feed rate</li> </ul>
4	Chipping	<ul style="list-style-type: none"> <li>– Unstable tool life</li> <li>– Sudden breakage of cutting edge</li> </ul>	<ul style="list-style-type: none"> <li>– Grade too hard</li> <li>– Feed rate too high</li> <li>– Cutting edge not stable enough</li> <li>– Stability of the holder or tension insufficient</li> </ul>	<ul style="list-style-type: none"> <li>– Grade with higher toughness</li> <li>– Reduce feed rate</li> <li>– Change honing of cutting edge</li> <li>– Use a more stable tool holder</li> </ul>
5	Breakage	<ul style="list-style-type: none"> <li>– Increase of cutting force</li> <li>– Bad surface quality and dimensional stability</li> </ul>	<ul style="list-style-type: none"> <li>– Grade too hard</li> <li>– Feed rate too high</li> <li>– Cutting edge not stable enough</li> <li>– Stability of the holder or tension insufficient</li> </ul>	<ul style="list-style-type: none"> <li>– Grade with higher toughness</li> <li>– Reduce feed rate</li> <li>– Change honing of cutting edge</li> <li>– Use a more stable tool holder</li> </ul>
6	Plastic deformation	<ul style="list-style-type: none"> <li>– Bad dimensional stability</li> <li>– Damage to cutting edge</li> </ul>	<ul style="list-style-type: none"> <li>– Grade not wear-resistant enough</li> <li>– Cutting speed too high</li> <li>– Cutting depth and/or feed rate too high</li> <li>– Temperature on the cutting edge too high</li> </ul>	<ul style="list-style-type: none"> <li>– Grade with higher toughness</li> <li>– Reduce cutting speed</li> <li>– Reduce cutting depth and feed rate</li> <li>– Grade with higher heat-resistance</li> </ul>
7	Welding	<ul style="list-style-type: none"> <li>– Increase of cutting force</li> <li>– Bad surface quality</li> </ul>	<ul style="list-style-type: none"> <li>– Cutting speed too low</li> <li>– Cutting edge not sharp enough</li> <li>– Grade not suitable</li> </ul>	<ul style="list-style-type: none"> <li>– Increase cutting speed</li> <li>– Increase rake angle</li> <li>– Use a more suitable grade</li> </ul>
8	Thermal cracks	<ul style="list-style-type: none"> <li>– Breakage due to thermal interaction, often caused when cutting is interrupted (milling)</li> </ul>	<ul style="list-style-type: none"> <li>– Temperature fluctuation when machining</li> <li>– Grade too hard</li> </ul>	<ul style="list-style-type: none"> <li>– Dry machining</li> <li>– Grade with higher toughness</li> </ul>
9	Notch wear	<ul style="list-style-type: none"> <li>– Burr formation</li> <li>– Increase of cutting force</li> </ul>	<ul style="list-style-type: none"> <li>– Damage through chips (jagged edges)</li> <li>– Feed rate and cutting speed too high</li> </ul>	<ul style="list-style-type: none"> <li>– Grade with higher wear-resistance</li> <li>– Increase rake angle to get a sharper cutting edge</li> <li>– Reduce cutting speed</li> </ul>
10	Flaking (coating)	<ul style="list-style-type: none"> <li>– Often appears when machining hardened materials or caused by vibration</li> </ul>	<ul style="list-style-type: none"> <li>– Cutting edge adhesion and chipping</li> <li>– Bad chip removal</li> </ul>	<ul style="list-style-type: none"> <li>– Increase rake angle to get a sharper cutting edge</li> <li>– Chip breaker with bigger chip space</li> </ul>

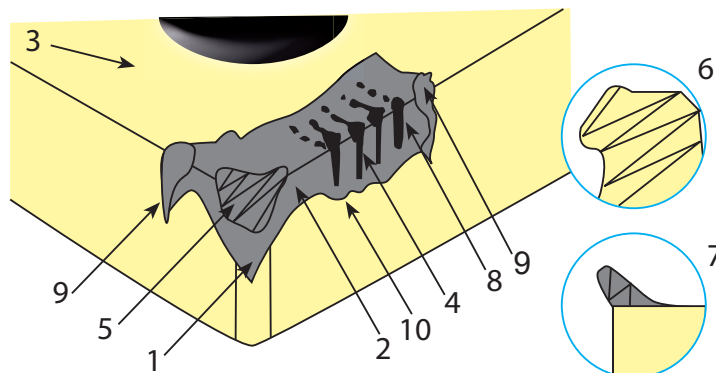

A

Turning

B

Milling

C

Drilling

D


Technical Information

E


Index

## Indexable milling

Difference between up-milling and down-milling

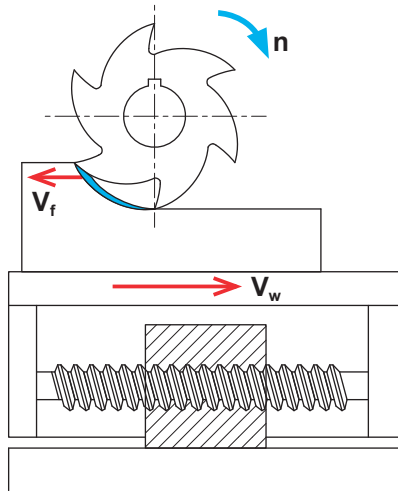

Up-milling

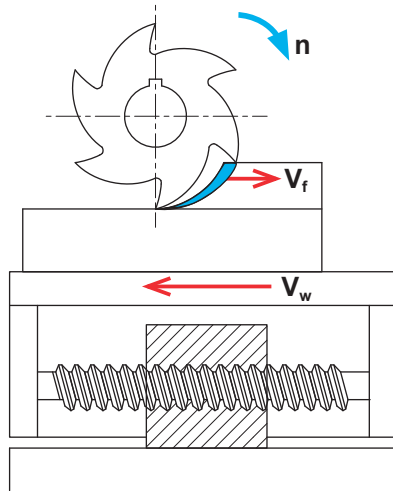

Down-milling

$V_f$  Feed rate tool  
 $V_w$  Feed rate work piece  
 $n$  Rotation

Up-milling: the feed direction of the work piece is opposite to that of the milling rotation at the connecting position.

Down-milling: the feed direction of the work piece is the same as that of the milling rotation at the connecting position.

### Advantages and disadvantages

Direction	Advantages	Disadvantages
Up-milling	<ul style="list-style-type: none"> <li>- Prevents hooking of tool</li> <li>- More smooth cut</li> </ul>	<ul style="list-style-type: none"> <li>- Bigger stress on cutting edge</li> <li>- Shorter tool life</li> </ul>
Down-milling	<ul style="list-style-type: none"> <li>- Higher tool life</li> <li>- Less thermal stress</li> </ul>	<ul style="list-style-type: none"> <li>- Hooking of tool possible</li> </ul>

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index




A

## Indexable milling

### Pitch selection

The pitch is the distance between one point on one cutting edge and the same point on the next edge. Milling cutters are mainly classified into wide, normal and fine pitches.

Turning

Operational stability		
L (low)	M (medium)	H (high)
Wide pitch	Normal pitch	Fine pitch
		
When the milling width is equal to the diameter of the cutter, the machining system is stable and main power of machine is sufficient, selecting a wide pitch can achieve high productive efficiency.	General milling function and multiple mixed productions.	When the milling width is less than the diameter of cutter, cutting by maximum edges can achieve high productive efficiency.

B

Milling

C

### Approach angle

The approach angle is composed by insert. Tool body, chip thickness, cutting forces and tool life are affected especially by the approach angle. Decreasing the approach angle reduces chip thickness and spreads the cutting area between cutting edge and work piece for a given feed rate. A smaller approach angle also guarantees stable entering or exiting the work piece, to protect the cutting edge and extend tool life. However this will increase higher axial cutting forces on the work piece, thus it is not suitable for machining thin work pieces such as thin plates.

Drilling

Approach angle	Feed rate per tooth	Max. cutting depth
90°	$f_z$	$h_{ex} = f_z \times \sin \alpha_r$
75°		$h_{ex} = 0,96 \times f_z$
60°		$h_{ex} = 0,86 \times f_z$
45°		$h_{ex} = 0,707 \times f_z$
Round		$h_{ex} = \frac{\sqrt{iC^2 \times (iC - 2a_p)^2}}{iC} \times f_z$

D




Technical Information

E

Index

## Indexable milling

### General formulas

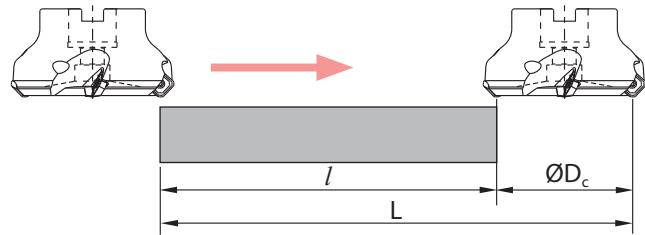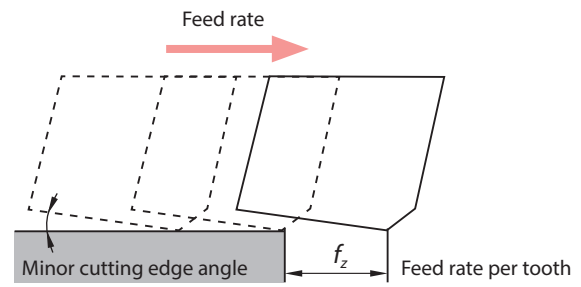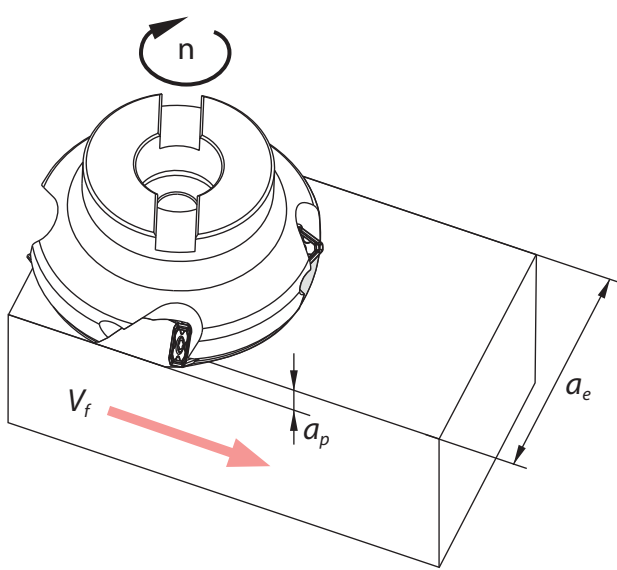

$V_c$ : Feed rate [m/min]  
 $D_c$ : Nominal diameter of milling tool [mm]  
 $n$ : Spindle speed [u/min]  
 $z_n$ : Number of teeth  
 $Q$ : Metal removal rate [cm<sup>3</sup>/min]

$V_f$ : Feed rate of worktable (feed speed) [mm/min]  
 $f_z$ : Feed rate per tooth [mm/z]  
 $\pi$ : ~3,14  
 $T_c$ : Machining time [min]  
 $f_n$ : Feed rate per revolution [mm/u]

Cutting speed	$V_c = \frac{\pi \times D_c \times n}{1000} \text{ [m/min]}$
Spindle speed	$n = \frac{1000 \times V_c}{\pi \times D_c} \text{ [rev/min]}$
Feed rate of work table	$V_f = f_z \times n \times z_n \text{ [mm/min]}$
Feed rate per tooth	$f_z = \frac{V_f}{n \times z_n} \text{ [mm/z]}$
Feed rate per revolution	$f_n = \frac{V_f}{n} \text{ [mm/rev]}$
Machining time	$T_c = \frac{1000 \times V_c}{\pi \times D_c} \text{ [min]}$
Metal removal rate	$Q = \frac{a_p \times a_e \times V_f}{1000} \text{ [cm}^3\text{/min]}$

A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index

A

## Indexable milling

### Function of angles when face milling

Turning

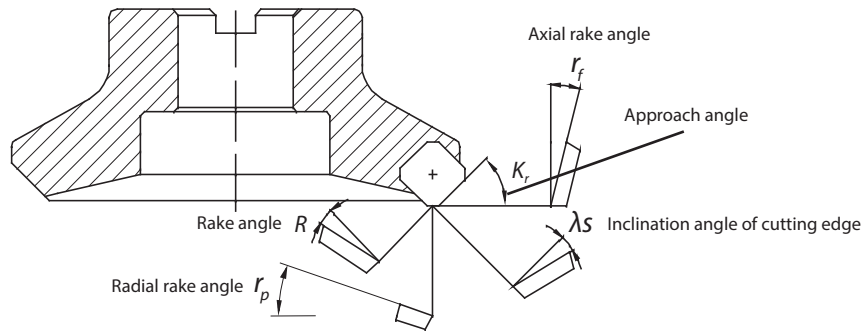

B

### Main angles

Angle	Feature	Effet		
Axial rake angle $r_f$	Influences chip direction	Negative angle, good chip removal		
Radial rake angle $r_p$	Influences cutting edge sharpness	Positive angle, good cutting performance		
Approach angle $K_r$	Influences chip thickness	$K_r \uparrow$ , chip thickness $\uparrow$ ; $K_r \downarrow$ , chip thickness $\downarrow$ ;		
Rake angle $R$	Influences cutting force	Poor cutting performance, stable cutting edge	$(-) \leftarrow 0 \rightarrow (+)$	Good cutting performance, unstable cutting edge
Inclination angle $\lambda_s$	Influences chip flow direction	Poor cutting performance, stable cutting edge	$(-) \leftarrow 0 \rightarrow (+)$	Good cutting performance, unstable cutting edge

Milling

C

### Combination of different rake angles

		Double positive	Double negative	Positive/Negative
Negative rake angle				
Neutral angle				
Positive angle				
Axial rake angle $r_f$		+	-	+
Radial rake angle $r_p$		+	-	-
Application field	P	√		√
	M	√		√
	K		√	√
	N	√		
	S	√		√

Drilling

D




Technical Information

E



Index

## Indexable milling

### Cutting performances of different approach angles


Approach angle	Depiction	Explanation
45°		Axial force is largest. It will bend when machining thin-wall work piece, and reduces the precision of work piece. It is benefit to avoid fringe breakage of work piece when machining cast iron.
75°		The main purpose is to resolve the radial cutting force, it is often used for general face milling.
90°		The axial force is zero in theory, suitable for milling thin plate workpiece.

### Inserts with wiper

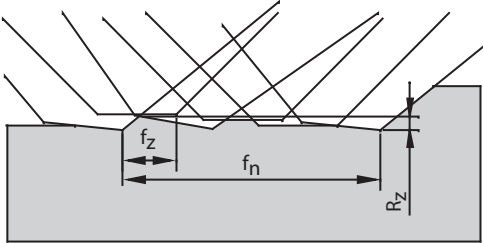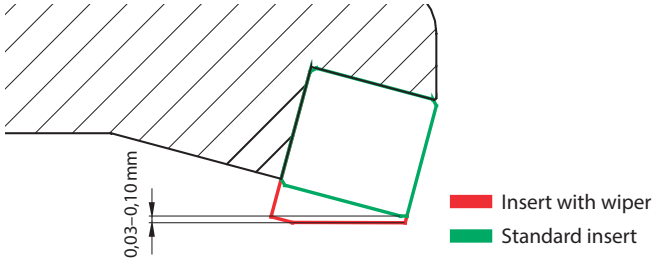Using standard inserts	Using inserts with wiper
 <p>Normal surface quality</p>	 <p>High surface quality</p>

The wiper insert must protrude below the other inserts by 0.03–0.10 mm at axial direction, only that the wiping function can take into effect. Generally speaking, a cutter can assemble only one wiper insert. If the diameter of cutter is much bigger or cutter's feed rate per revolution is bigger than the length of wiper edge, 2 to 3 wiper inserts can be assembled.

### Cutting width

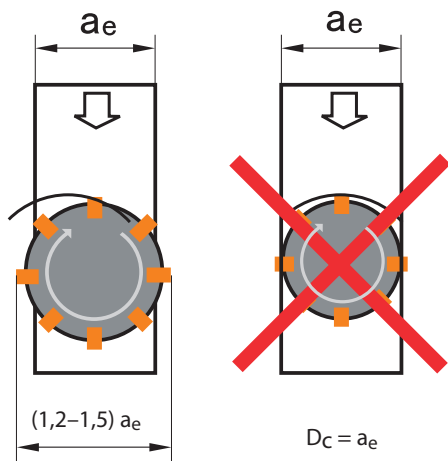

Generally speaking, the relation between cutting width and tool cutting diameter is  $D_c = (1.2-1.5) a_e$ .

In the machining practice, it needs to avoid coincidence of tool center and workpiece center as much as possible.

$D_c$ : Tool diameter  
 $a_e$ : Lateral infeed

A

Turning

B

Milling

C

Drilling

D



Technical Information

E

Index

## Indexable milling

### Plunging and circular milling with insert APKT

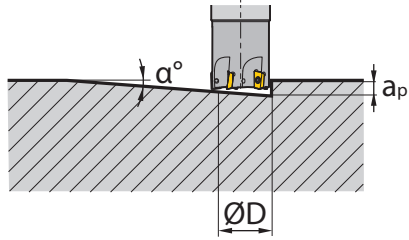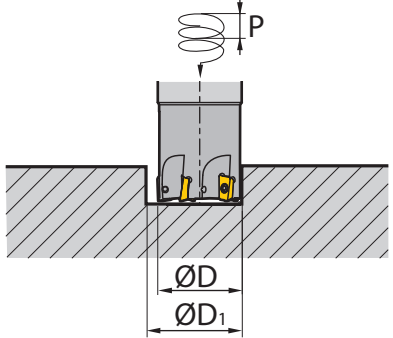		Plunging		Circular milling	
					
		$L_m = \frac{a_p}{\tan \alpha}$ <p><math>\alpha</math> : Angle de plongée</p>		$P = \tan \alpha \times \pi \times D_1$ <p><math>\alpha</math> : Angle d'hélice</p>	
Insert	Diameter $\phi D$ [mm]	Max. cutting depth $a_p$ [mm]	Max. plunge angle $\alpha^\circ$	Min. diameter $\phi D_1$ [mm]	Max. diameter [mm]
AP**11**	16	10	10	20	30
	20	10	5	28	38
	25	10	4	40	48
	32	10	3	56	60
	40	10	2	70	76

Reduce the feed rate when plunging and circular milling.  
 For drilling operations (axial) set the feed rate under 0.2mm.  
 „Attention“ – drilling can form long chips.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index

## Indexable milling

Plunging and circular milling with insert WPGT or SDMT

Approx. programmed radius

Insert	approx. R [mm]	Residual material K [mm]
WPGT050315ZSR	2	0,5
WPGT060415ZSR	2,5	0,7
WPGT080615ZSR	2,5	0,7
WPGT090725ZSR	4,5	1,2
SDMT06T208	1,6	0,5
SDMT09T312	2,5	0,87
SDMT120412	4,0	0,93
SDMT150620	4,0	1,38

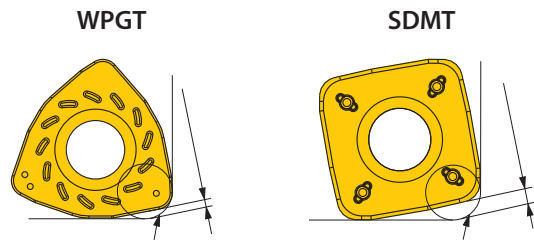

### Insert WPGT

Insert	Diameter ØD [mm]	Plunging		Circular milling	
		Max. cutting depth a <sub>p</sub> [mm]	Max. plunge angle α°	Min. diameter ØD <sub>1</sub> [mm]	Max. diameter [mm]
WP**05**	20	1,5	12	24	37
	25	1,5	8,8	31	47
WP**06**	32	1,5	5	45	61
	40	1,5	3,2	61	77
	50	1,5	2,8	81	97
WP**08**	40	1,5	9	52	77
	50	1,5	5,4	71	97
	63	1,5	4,3	97	123
	80	1,5	2,9	131	157
	100	1,5	2,1	171	197
	125	1,5	1,3	221	247
WP**09**	160	1,5	1,1	291	317
	50	3,0	7,2	70	96
	63	3,0	4,5	96	122
	80	3,0	2,8	130	156
	100	3,0	2,2	170	196
	125	3,0	1,6	220	246
	160	3,0	1,2	290	316

Reduce the feed rate when plunging and circular milling.  
For drilling operations (axial) set the feed rate under 0.2 mm.  
„Attention“ – drilling can form long chips.



## Indexable milling

### Insert SDMT

A

Turning

B

Milling

C



Drilling

D

Technical Information

E




Index

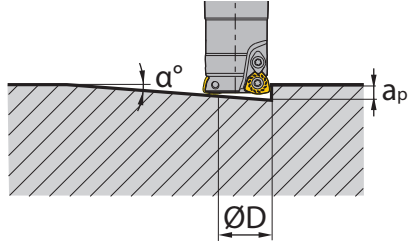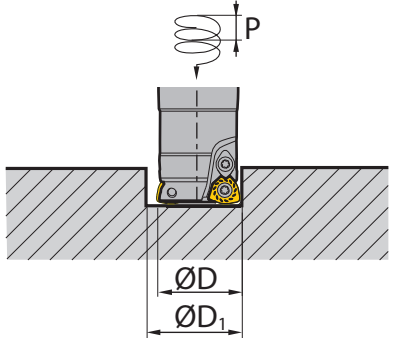		Plunging		Circular milling	
					
		$L_m = \frac{a_p}{\tan \alpha}$ <p><math>\alpha</math>: Plunge angle</p>		$P = \tan \alpha \times \pi \times D_1$ <p><math>\alpha</math>: Helix angle</p>	
Insert	Diameter $\varnothing D$ [mm]	Max. cutting depth $a_p$ [mm]	Max. plunge angle $\alpha^\circ$	Min. diameter $\varnothing D_1$ [mm]	Max. diameter [mm]
SD**06**	20	0,8	3,6	30	38
	25	0,8	2,8	40	48
	32	0,8	1,6	52	60
	40	0,8	1,1	70	78
	50	0,8	0,8	90	98
SD**09**	63	0,8	0,7	114	122
	25	1,4	6,5	34	48
	32	1,4	4,5	48	62
	35	1,4	3,6	54	68
	50	1,4	1,8	84	98
SD**12**	63	1,4	1,3	110	124
	32	1,8	10,4	44	60
	40	1,8	5,7	60	76
	50	1,8	3,5	80	96
	63	1,8	2,5	106	122
SD**15**	80	1,8	1,6	140	156
	100	1,8	1,2	180	196
	40	2,2	7,3	54	76
	80	2,2	1,4	134	156
	100	2,2	1,0	174	196
	125	2,2	0,9	234	246
	160	2,2	0,6	304	316




Reduce the feed rate when plunging and circular milling.  
 For drilling operations (axial) set the feed rate under 0,2mm.  
 „Attention“ – drilling can form long chips.

Solid carbide mills

Terminology
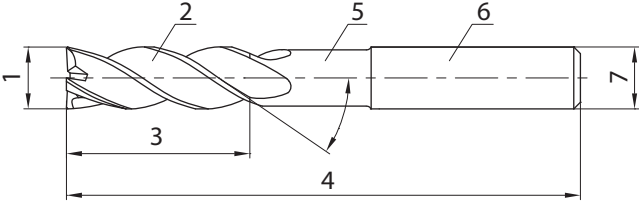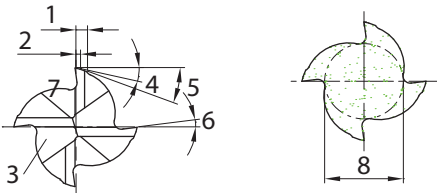
<p><b>A</b></p>		<ol style="list-style-type: none"> <li>1. Cutting edge diameter</li> <li>2. Chip pocket</li> <li>3. Length of cutting edge</li> <li>4. Total length</li> <li>5. Neck</li> <li>6. Shank</li> <li>7. Shank diameter</li> </ol>
<p><b>B</b></p>		<ol style="list-style-type: none"> <li>1. Chamfer width, main cutting edge</li> <li>2. Chamfer width, diameter</li> <li>3. Neck, front side</li> <li>4. Primary radial clearance angle</li> <li>5. Secondary radial clearance angle</li> <li>6. Radial rake angle</li> <li>7. Axial main cutting edge</li> <li>8. Core diameter</li> </ol>
<p><b>C</b></p>		<ol style="list-style-type: none"> <li>1. Cutting edge</li> <li>2. Axial rake angle</li> <li>3. Primary axial clearance angle</li> <li>4. Secondary axial clearance angle</li> <li>5. Inclination angle</li> <li>6. Radial cutting edge</li> </ol>

Teeth, chip pocket and tool rigidity

Teeth	2 flutes	3 flutes	4 flutes
Cross section			
Cutting edge ratio	54 %	56 %	60 %
Advantages	<ul style="list-style-type: none"> <li>- Large chip pocket</li> <li>- Good chip removal</li> </ul>	<ul style="list-style-type: none"> <li>- Good chip removal</li> <li>- Good surface quality</li> </ul>	<ul style="list-style-type: none"> <li>- Good rigidity</li> <li>- Good surface</li> </ul>
Application	<ul style="list-style-type: none"> <li>- Slot milling</li> <li>- Square shoulder milling</li> <li>- Drilling</li> </ul>	<ul style="list-style-type: none"> <li>- Slot milling</li> <li>- Square shoulder milling</li> <li>- Finishing</li> </ul>	<ul style="list-style-type: none"> <li>- Slot milling (flat)</li> <li>- Square shoulder milling</li> <li>- Finishing</li> </ul>


Length of cutting edge (overhang) and cutting diameter

The shorter the overhang, the stronger the rigidity. Thus isn't easy to generate. Bend and vibration in the cutting process may occur.

Length (overhang) increases by 1 time, the deflection degree (f) will be 8 times of the former one.

**Reduce the overhang by 20 %  
the deflection degree (f) will decrease by 50 %**

**Increase the diameter by 20 %  
the deflection degree (f) will decrease by 50 %**

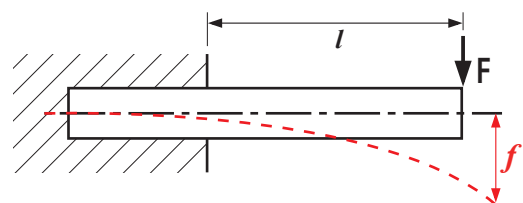

$$f = \frac{F \times l^3}{3 \times E \times I} = \frac{F \times l^3 \times 64}{3 \times E \times I}$$

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index


A

## Solid carbide mills

### Machining strategy – HPC/UM (HSC) milling cutters

**HPC = High Performance Cutting**

Machining with significantly increased metal removal rate through higher cutting speeds and feed rates compared with conventional machine cutting processes.



Full-slot milling


Turning

B


**HSC (UM) = High Speed Cutting**

High cutting speeds and feed rates in combination with low cutting depths lead to lower chip thickness as in normal machining.

Milling

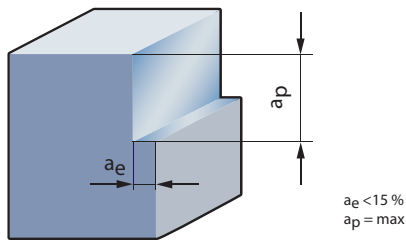

Profiling



Trochoidal milling



C

Drilling

The UM milling cutter is specifically optimised for HSC machining.

D

Technical Information



High metal removal rates can be realised with this tool.

Especially on highly dynamic machines with optimised tool paths this milling cutter shows its full potential.



E

Index

### Solid carbide mills

#### HSC strategy


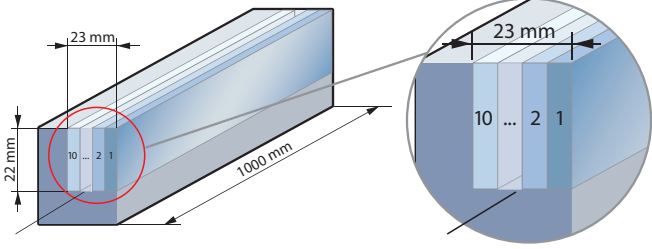
It's important to use the right strategy. When programming make sure the width of cut is kept. The width of cut is usually not higher than 15 %. Regarding the depth of cut, the total length of the cutting edge can be used.

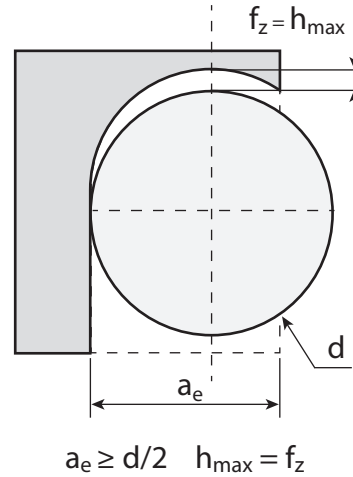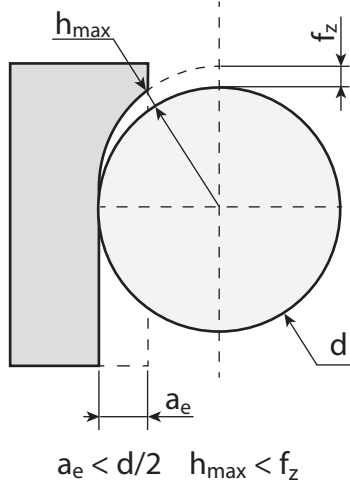

$$h_{max} = 2f_z \sqrt{\frac{a_e}{d} \left(1 - \frac{a_e}{d}\right)}$$

When changing the width of cut the cutting data needs to be adjusted. As calculatory size applies a chip thickness from approx. 0.15–0.2 mm on basis of the usual steel types.

#### Example

Tool	Machining
 <p>UM-4E-D20.0-W KMG405</p>	 <p>HSC strategy</p>

#### Workpiece material

16MnCr5 (1.7131) ca. 700N/mm<sup>3</sup>

#### Cutting data

$V_c$	550 m/min
$n$	8750 1/min
$f_z$	0,3 mm ( $h_{max} = 0,19$ mm)
$V_f$	10500 mm/min
$a_p$	22 mm
$a_e$	2,3 mm

#### Result

Chip removal rate **530 cm<sup>3</sup>/min!** Machining time 58 seconds! The maximum chip thickness is 0.19 mm.

A

Turning

B

Milling

C

Drilling

D


Technical Information

E

Index

## Solid carbide mills

Feed rate selecting table for profile machining with ball nose cutters and torus mills

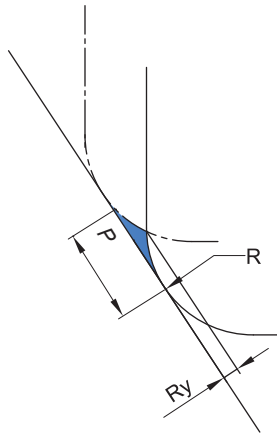

$$Ry = R \times \{1 - \cos [\arcsin (fr/2R)]\}$$

Ry: Theoretical values of surface quality

P: Feed rate


R: Radius of the ball nose cutter or torus mill

R	Ry	Feed rate									
		0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
0,5		0,003	0,010	0,023	0,042	0,067	0,100				
1,0		0,001	0,005	0,011	0,020	0,032	0,046	0,063	0,083	0,107	
1,5		0,001	0,003	0,008	0,013	0,021	0,030	0,041	0,054	0,069	0,086
2,0		0,001	0,003	0,006	0,010	0,015	0,023	0,031	0,040	0,051	0,064
2,5		0,001	0,002	0,005	0,008	0,013	0,018	0,025	0,032	0,041	0,051
3,0			0,001	0,004	0,007	0,010	0,015	0,020	0,027	0,034	0,042
4,0			0,001	0,003	0,005	0,008	0,011	0,015	0,020	0,025	0,031
5,0			0,001	0,002	0,004	0,006	0,009	0,012	0,016	0,020	0,025
6,0				0,002	0,003	0,005	0,008	0,010	0,013	0,017	0,021
8,0				0,001	0,003	0,004	0,006	0,008	0,010	0,013	0,016
10,0				0,001	0,002	0,003	0,005	0,006	0,008	0,010	0,013
12,5				0,001	0,002	0,003	0,004	0,005	0,006	0,008	0,010

R	Ry	Feed rate									
		1,1	1,2	1,3	1,4	1,5	1,6	1,7	1,8	1,9	2,0
0,5											
1,0											
1,5		0,104									
2,0		0,077	0,092	0,109							
2,5		0,061	0,073	0,086	0,100						
3,0		0,051	0,061	0,071	0,083	0,095	0,109				
4,0		0,038	0,045	0,053	0,062	0,071	0,081	0,091	0,103		
5,0		0,030	0,036	0,042	0,049	0,057	0,064	0,073	0,082	0,091	0,101
6,0		0,025	0,030	0,035	0,041	0,047	0,054	0,061	0,068	0,076	0,084
8,0		0,019	0,023	0,026	0,031	0,035	0,040	0,045	0,051	0,057	0,063
10,0		0,015	0,018	0,021	0,025	0,028	0,032	0,036	0,041	0,045	0,050
12,5		0,012	0,014	0,017	0,020	0,023	0,026	0,029	0,032	0,036	0,040

# Go directly to the special tool tailored for your milling applications


Are there milling applications at your company where having custom tools tailored to your unique needs would deliver real benefits both in terms of logistics and at a technical and commercial level? ZCC Cutting Tools Europe is there to advise and assist you during the planning, development and ordering process. Use our new online tool to request a special tool and get your personal quotation in just a few short steps (<https://www.zcct-europe.com/en/tools/special-tools>).

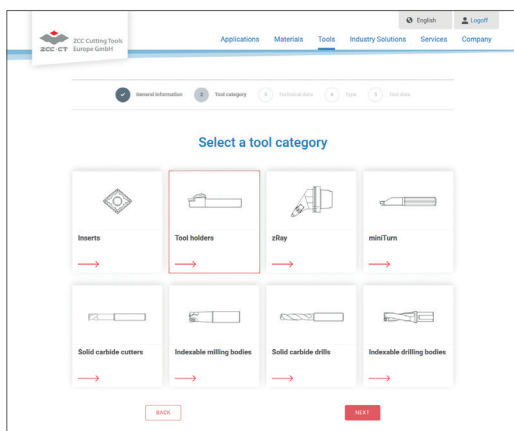

'Online tool for special tools' launch page where you can select the tool category

## Selecting the tool category

Scan the QR code on this page to go directly to the launch page of our online tool where you can request the special tool you need. You can begin by selecting the tool category you need. It's that easy.

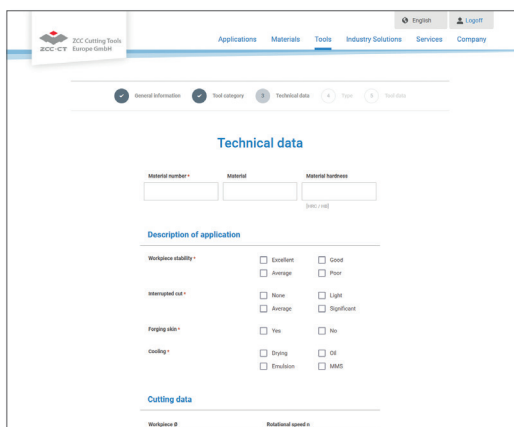

Define the relevant tool parameters.

## Defining the tool parameters

You are now guided step by step through the process. You can also securely upload your drawings, diagrams and 3D models (where available).

It's the easy way to order your custom-made special tool from ZCC Cutting Tools Europe GmbH.



Now go directly to the new **special tool form** on our website and get started.