

SOLID CARBIDE REAMERS

Solid carbide reamers

Product overview	C154
Grade overview	C155
System code – solid carbide reamers	C156
Solid carbide reamers	C157-C163
Recommended cutting data	C164-C169
Trouble shooting	C206
Technical information	C210
Special tools	C170-C171



A

Turning

B

Milling

C

Drilling

D





Technical
Information

E

Index

A

Turning

Products	Solid carbide reamers	Ø	Application						Type	Page
			P	M	K	N	S	H		
3101H7		4-20			✓	✓			Right helical flute	C157
3102H7		4-20			✓	✓			Straight flute	C158
3112H7		4-20	✓		✓				Straight flute with inner hole	C159
3103H7		4-20			✓	✓			Left helical flute	C163

✓ Very suitable ✓ Suitable

B

Milling

C

Drilling

D

Technical Information

E

Index

Coated cemented carbide PVD

Grade	Grade description
-------	-------------------

KRG102	PVD coated P10–P20/K10–K20 carbide substrate for steel and cast iron.
---------------	---

Uncoated cemented carbide

Grade	Grade description
-------	-------------------

YK10F	Uncoated N10/K10 carbide substrate for cast iron and non ferrous materials.
--------------	---

A

Turning

B

Milling

C

Drilling

DTechnical
Information**E**

Index

3 1 0 1 H7 – 0850

1 2 3 4 5 6

A

Turning

Type	
Code	Description
3	Reamer

Shank type	
Code	Description
1	Straight shank
2	Straight shank DIN10
5	Straight shank DIN 6535 HA
9	Morse taper shank

B

Milling

1

2

Coolant supply	
Code	Description
0	External
1	Internal

Flute	
Code	Description
1	Right-hand twist
2	Straight flute
3	Left-hand twist

3

4

C

Drilling

Classe de tolérance	
Code	Description
H7	The tolerance class of the reamed hole is equivalent to H7 (GB/T1800-1804)

Diameter [mm]	
Code	Description
0850	8,5
...	

5

6

D

Technical Information

E

Index



a Reaming


Reamer, right-hand twist

Cast iron, non-ferrous metals

3101H7



– Factory standard



Article	*	Dimensions [mm]				Teeth	Grade
		d ₁	d ₂ (h6)	l ₁	l ₃		YK10F
3101H7-0400		4	3.55	56	20	4	●
3101H7-0500		5	4	63	22	6	○
3101H7-0600		6	5	63	22	6	○
3101H7-0700		7	6.3	71	25	6	○
3101H7-0800		8	6.3	71	25	6	○
3101H7-0900		9	8	71	25	6	○
3101H7-1000		10	8	71	25	6	○
3101H7-1200		12	10	80	28	6	○
3101H7-1300		13	10	80	28	6	○
3101H7-1450		14.5	12.5	90	32	6	○
3101H7-1600		16	12.5	90	32	6	○

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
		✓	✓		

✓ Very suitable

✓ Suitable

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170


A

Reamer, straight flute **Cast iron, non-ferrous metals**

3102H7



– Factory standard



Turning

B

Milling

Article	*	Dimensions [mm]				Teeth	Grade
		d ₁	d ₂ (h6)	l ₁	l ₃		YK10F
3102H7-0400		4	3.55	56	20	4	○
3102H7-0500		5	4	63	22	6	○
3102H7-0600		6	5	63	22	6	○
3102H7-1000		10	8	71	25	6	○
3102H7-1050		10.5	8	71	25	6	○
3102H7-1100		11	10	80	28	6	○
3102H7-1300		13	10	80	28	6	○
3102H7-1400		14	12.5	90	32	6	○

● Ex stock ○ On demand

* With internal cooling

C

Drilling

Application field						
P	M	K	N	S	H	
		✓	✓			✓ Very suitable
						✓ Suitable

D

Technical Information

E

Index

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170


Reamer, straight flute

Steel, cast iron

3112H7



- Factory standard
- Coolant exit, axial concentric



Article	*	Dimensions [mm]						Teeth	Grade
		d ₁	d ₂ (h6)	d ₃ (m7)	l ₁	l ₂	l ₃		KRG102
3112H7-0295	*	2.95	4	0.6	70	28	20	4	○
3112H7-0296	*	2.96	4	0.6	70	28	20	4	○
3112H7-0297	*	2.97	4	0.6	70	28	20	4	○
3112H7-0298	*	2.98	4	0.6	70	28	20	4	○
3112H7-0299	*	2.99	4	0.6	70	28	20	4	○
3112H7-0300	*	3	3.5	0.6	70	28	20	4	●
3112H7-0301	*	3.01	4	0.6	70	28	20	4	●
3112H7-0302	*	3.02	4	0.6	70	28	20	4	●
3112H7-0303	*	3.03	4	0.6	70	28	20	4	●
3112H7-0318	*	3.18	4	0.6	70	28	20	4	○
3112H7-0348	*	3.48	4	0.6	70	28	20	4	○
3112H7-0350	*	3.5	4	0.6	70	28	20	4	○
3112H7-0395	*	3.95	4	0.6	70	28	20	4	○
3112H7-0396	*	3.96	4	0.6	70	28	20	4	○
3112H7-0397	*	3.97	4	0.6	70	28	20	4	○
3112H7-0398	*	3.98	4	0.6	70	28	20	4	○
3112H7-0399	*	3.99	4	0.6	70	28	20	4	○
3112H7-0400	*	4	4	0.6	70	28	20	6	●
3112H7-0401	*	4.01	4	1	70	28	20	4	●
3112H7-0402	*	4.02	4	1	70	28	20	4	●
3112H7-0403	*	4.03	4	1	70	28	20	4	●
3112H7-0404	*	4.04	4	1	70	28	20	4	○
3112H7-0405	*	4.05	4	1	70	28	20	4	○
3112H7-0407	*	4.07	4	1	70	28	20	4	○
3112H7-0408	*	4.08	4	1	70	28	20	4	●
3112H7-0450	*	4.5	5	1	70	28	20	4	○
3112H7-0452	*	4.52	5	1	70	28	20	4	○
3112H7-0457	*	4.57	5	1	70	28	20	4	○
3112H7-0495	*	4.95	5	1	70	28	22	6	○
3112H7-0496	*	4.96	5	1	70	28	22	6	○
3112H7-0497	*	4.97	5	1	70	28	22	6	○
3112H7-0498	*	4.98	5	1	70	28	22	6	○
3112H7-0499	*	4.99	5	1	70	28	22	6	○
3112H7-0500	*	5	5	1	70	28	22	6	●
3112H7-0501	*	5.01	5	1	70	28	22	6	●
3112H7-0502	*	5.02	5	1	70	28	22	6	●
3112H7-0503	*	5.03	5	1	70	28	22	6	●

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
✓		✓			

✓ Very suitable

✓ Suitable

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170




Reamer, straight flute

Steel, cast iron

3112H7



- Factory standard
- Coolant exit, axial concentric



Article	*	Dimensions [mm]						Teeth	Grade
		d ₁	d ₂ (h6)	d ₃ (m7)	l ₁	l ₂	l ₃		
3112H7-0504	*	5.04	5	1	70	28	22	6	○
3112H7-0505	*	5.05	5	1	70	28	22	6	○
3112H7-0550	*	5.5	6	1	70	28	22	6	○
3112H7-0553	*	5.53	6	1	70	28	22	6	○
3112H7-0561	*	5.61	6	1	70	28	22	6	○
3112H7-0593	*	5.93	6	1	70	28	22	6	○
3112H7-0595	*	5.95	6	1	100	36	22	6	●
3112H7-0596	*	5.96	6	1	100	36	22	6	●
3112H7-0597	*	5.97	6	1	100	36	22	6	●
3112H7-0598	*	5.98	6	1	100	36	22	6	●
3112H7-0599	*	5.99	6	1	100	36	22	6	●
3112H7-0600	*	6	6	1	100	36	22	6	●
3112H7-0601	*	6.01	6	1.3	100	36	22	6	●
3112H7-0602	*	6.02	6	1.3	100	36	22	6	●
3112H7-0603	*	6.03	6	1.3	100	36	22	6	●
3112H7-0635	*	6.35	8	1.3	100	36	22	6	○
3112H7-0650	*	6.5	8	1.3	100	36	22	6	○
3112H7-0655	*	6.55	8	1.3	100	36	22	6	○
3112H7-0693	*	6.93	8	1.3	100	36	22	6	○
3112H7-0695	*	6.95	8	1.3	110	42	25	6	○
3112H7-0696	*	6.96	8	1.3	110	42	25	6	○
3112H7-0697	*	6.97	8	1.3	110	42	25	6	○
3112H7-0698	*	6.98	8	1.3	110	42	25	6	○
3112H7-0699	*	6.99	8	1.3	110	42	25	6	○
3112H7-0700	*	7	8	1.3	110	42	25	6	●
3112H7-0701	*	7.01	8	1.3	110	42	25	6	●
3112H7-0702	*	7.02	8	1.3	110	42	25	6	●
3112H7-0703	*	7.03	8	1.3	110	42	25	6	●
3112H7-0750	*	7.5	8	1.3	110	42	25	6	○
3112H7-0770	*	7.7	8	1.3	110	42	25	6	○
3112H7-0793	*	7.93	8	1.3	110	42	25	6	○
3112H7-0795	*	7.95	8	1.3	110	42	25	6	○
3112H7-0796	*	7.96	8	1.3	110	42	25	6	○
3112H7-0797	*	7.97	8	1.3	110	42	25	6	○
3112H7-0798	*	7.98	8	1.3	110	42	25	6	○
3112H7-0799	*	7.99	8	1.3	110	42	25	6	○
3112H7-0800	*	8	8	1.3	110	42	25	6	●

- Ex stock ○ On demand
- * With internal cooling

Application field

P	M	K	N	S	H
✓		✓			

- ✓ Very suitable
- ✓ Suitable

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170


Reamer, straight flute

Steel, cast iron

3112H7



- Factory standard
- Coolant exit, axial concentric



Article	*	Dimensions [mm]						Teeth	Grade
		d ₁	d ₂ (h6)	d ₃ (m7)	l ₁	l ₂	l ₃		KRG102
3112H7-0801	*	8.01	8	2	110	42	25	6	●
3112H7-0802	*	8.02	8	2	110	42	25	6	●
3112H7-0803	*	8.03	8	2	110	42	25	6	●
3112H7-0880	*	8.8	10	2	110	42	25	6	○
3112H7-0885	*	8.85	10	2	110	42	25	6	○
3112H7-0900	*	9	10	2	110	42	25	6	●
3112H7-0901	*	9.01	10	2	110	42	25	6	●
3112H7-0902	*	9.02	10	2	110	42	25	6	○
3112H7-0903	*	9.03	10	2	110	42	25	6	●
3112H7-0920	*	9.2	10	2	110	42	25	6	○
3112H7-0930	*	9.3	10	2	110	42	25	6	○
3112H7-0993	*	9.93	10	2	110	42	25	6	○
3112H7-0995	*	9.95	10	2	110	38	25	6	○
3112H7-0996	*	9.96	10	2	110	38	25	6	○
3112H7-0997	*	9.97	10	2	110	38	25	6	○
3112H7-0998	*	9.98	10	2	110	38	25	6	○
3112H7-0999	*	9.99	10	2	110	38	25	6	○
3112H7-1000	*	10	10	2	110	38	25	6	●
3112H7-1001	*	10.01	10	2	110	38	25	6	●
3112H7-1002	*	10.02	10	2	110	38	25	6	●
3112H7-1003	*	10.03	10	2	110	38	25	6	●
3112H7-1024	*	10.24	10	2	110	38	24	6	○
3112H7-1100	*	11	12	2	110	38	28	6	●
3112H7-1101	*	11.01	10	2	110	38	24	6	●
3112H7-1102	*	11.02	10	2	110	38	24	6	○
3112H7-1103	*	11.03	10	2	110	38	24	6	●
3112H7-1155	*	11.55	12	2	110	38	28	6	○
3112H7-1195	*	11.95	12	2	110	38	28	6	○
3112H7-1196	*	11.96	12	2	110	38	28	6	○
3112H7-1197	*	11.97	12	2	110	38	28	6	○
3112H7-1198	*	11.98	12	2	110	38	28	6	○
3112H7-1199	*	11.99	12	2	110	38	28	6	○
3112H7-1200	*	12	12	2	110	38	28	6	●
3112H7-1201	*	12.01	12	2	110	38	28	6	●
3112H7-1202	*	12.02	12	2	110	38	28	6	●
3112H7-1203	*	12.03	12	2	110	38	28	6	●
3112H7-1300	*	13	14	2	110	38	28	6	●

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
✓		✓			

✓ Very suitable

✓ Suitable

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170



A

Reamer, straight flute


Steel, cast iron

Turning

3112H7



- Factory standard
- Coolant exit, axial concentric



B

Milling

Article	*	Dimensions [mm]						Teeth	Grade
		d ₁	d ₂ (h6)	d ₃ (m7)	l ₁	l ₂	l ₃		KRG102
3112H7-1301	*	13.01	14	2	110	38	28	6	●
3112H7-1302	*	13.02	14	2	110	38	28	6	●
3112H7-1303	*	13.03	14	2	110	38	28	6	●
3112H7-1394	*	13.94	14	2	110	38	28	6	○
3112H7-1400	*	14	14	2	110	38	32	6	●
3112H7-1401	*	14.01	14	2	110	38	28	6	●
3112H7-1402	*	14.02	14	2	110	38	28	6	●
3112H7-1403	*	14.03	14	2	110	38	28	6	●
3112H7-1500	*	15	16	2	110	38	32	6	●
3112H7-1501	*	15.01	16	2	110	38	28	6	●
3112H7-1502	*	15.02	16	2	110	38	28	6	○
3112H7-1503	*	15.03	16	2	110	38	28	6	●
3112H7-1565	*	15.65	16	2	110	38	28	6	○
3112H7-1593	*	15.93	16	2	110	38	28	6	○
3112H7-1595	*	15.95	16	2	150	52	32	6	○
3112H7-1596	*	15.96	16	2	150	52	32	6	○
3112H7-1597	*	15.97	16	2	150	52	32	6	○
3112H7-1598	*	15.98	16	2	150	52	32	6	○
3112H7-1599	*	15.99	16	2	150	52	32	6	○
3112H7-1600	*	16	16	2	150	52	32	6	●
3112H7-1601	*	16.01	16	3	150	52	32	6	●
3112H7-1602	*	16.02	16	3	150	52	32	6	○
3112H7-1603	*	16.03	16	3	150	52	32	6	●
3112H7-1800	*	18	18	3	150	52	36	6	●
3112H7-2000	*	20	20	3	150	50	36	6	●

● Ex stock ○ On demand

* With internal cooling

C

Drilling

D

Technical Information

Application field

P	M	K	N	S	H
✓		✓			

✓ Very suitable

✓ Suitable

E

Index

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170



Reamer, left-hand twist

Cast iron, non-ferrous metals

3103H7



– Factory standard



Article	*	Dimensions [mm]				Teeth	Grade
		d ₁	d ₂ (h6)	l ₁	l ₃		YK10F
3103H7-0400		4	3.55	56	20	4	○
3103H7-0500		5	4	63	22	6	○
3103H7-0600		6	5	63	22	6	○
3103H7-0800		8	6.3	71	25	6	○
3103H7-0950		9.5	8	71	25	6	○
3103H7-1000		10	8	71	25	6	○
3103H7-1150		11.5	10	80	28	6	○
3103H7-1200		12	10	80	28	6	○
3103H7-1600		16	12.5	90	32	6	○
3103H7-1800		18	16	100	36	6	○

● Ex stock ○ On demand

* With internal cooling

Application field					
P	M	K	N	S	H
		✓	✓		

✓ Very suitable

✓ Suitable

System code > C156

Machining instructions > C201

Cutting data > C164

Nonstandard order > C170

Guide for recommended cutting data – Solid carbide reamers

Solid carbide reamers

Material group	Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v_c [m/min]							
					3101H7		3102H7		3112H7		3103H7	
					YK10F		YK10F		KRG102		YK10F	
					Coolant							
				external	f-group	external	f-group	internal	f-group	external	f-group	
P Unalloyed steel	ca. 0,15 % C	annealed	125	1								
	ca. 0,45 % C	annealed	190	2								
	ca. 0,45 % C	tempered	250	3								
	ca. 0,75 % C	annealed	270	4								
	ca. 0,75 % C	tempered	300	5								
P Low-alloyed steel		annealed	180	6						75	5	
		tempered	275	7						60	5	
		tempered	300	8						55	5	
		tempered	350	9						55	5	
P High-alloyed steel and high-alloyed tool steel		annealed	200	10						70	5	
		hardened and tempered	325	11						55	5	
M Stainless steel	ferritic/martensitic	annealed	200	12								
	martensitic	tempered	240	13								
	austenitic	quench hardened	180	14								
	austenitic-ferritic		230	15								
K Grey cast iron	perlitic/ferritic		180	16	23	5	23	5	75	5	23	5
	perlitic (martensitic)		260	17	19	5	19	5	60	5	19	5
	ferritic		160	18	19	5	19	5	60	5	19	5
	perlitic		250	19	17	5	17	5	50	5	17	5
K Cast iron with spheroidal graphite	ferritic		130	20	23	5	23	5	75	5	23	5
	perlitic		230	21	14	5	14	5	55	5	14	5
N Aluminium wrought alloys	cannot be hardened		60	22	45	6	45	6			45	6
	hardenable	hardened	100	23	40	6	40	6			40	6
	≤ 12% Si, cannot be hardened		75	24	37	6	37	6			37	6
	≤ 12% Si, hardenable	hardened	90	25	35	6	35	6			35	6
	> 12% Si, cannot be hardened		130	26	32	6	32	6			32	6
N Cast aluminium alloys	machining steel, PB > 1%		110	27	37	6	37	6			37	6
	CuZn, CuSnZn		90	28	34	6	34	6			34	6
	CuSn, Pb-free copper, electrolytic copper		100	29	37	6	37	6			37	6
S Copper and copper alloys (bronze/brass)	Fe-based alloys	annealed	200	30								
		hardened	280	31								
	Ni or Co base	annealed	250	32								
		hardened	350	33								
		cast	320	34								
S Titanium alloys	pure titanium		R _m 400	35								
	α and β alloys	hardened	R _m 1050	36								
H Hardened steel		hardened and tempered	55 HRC	37								
		hardened and tempered	60 HRC	38								
	Hard cast iron	cast	400	39								
H Hardened cast iron		hardened and tempered	55 HRC	40								
X Non-metallic materials	Thermoplasts			41								
	Thermosetting plastics			42								
	Plastic, glass-fibre reinforced GFRP			43								
	Plastic, carbon fibre reinforced CFRP			44								
	Graphite			45								
	Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases. With hole depths of 5xD adjust the cutting data accordingly to the application. f-group = feed rate recommendations on page C140. For examples of material for cutting tool groups view page D22.

Recommend feed rate

Solid carbide reamers

f _r -group	Feed rate [mm]																			
	Ø1	Ø2	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø13	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20
4	1	0,01	0,02	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,08	0,09	0,09	0,09	0,10	0,10
	2	0,01	0,02	0,03	0,04	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,10	0,10	0,10	0,10	0,11	0,11
	3	0,01	0,02	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,10	0,10	0,11	0,11	0,12	0,12	0,12	0,13
	4	0,02	0,03	0,04	0,06	0,06	0,07	0,08	0,09	0,09	0,10	0,11	0,11	0,12	0,12	0,13	0,13	0,14	0,14	0,15
5	5	0,02	0,03	0,05	0,06	0,07	0,09	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,14	0,15	0,15	0,16	0,16	0,17
	6	0,02	0,04	0,06	0,07	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,17	0,18	0,18	0,19	0,19
	7	0,02	0,04	0,06	0,09	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,18	0,19	0,20	0,20	0,21	0,22	0,22
	8	0,03	0,05	0,07	0,10	0,11	0,13	0,14	0,15	0,16	0,17	0,18	0,20	0,21	0,22	0,23	0,23	0,24	0,25	0,26
	9	0,03	0,06	0,08	0,11	0,13	0,15	0,16	0,17	0,18	0,20	0,21	0,23	0,24	0,25	0,26	0,27	0,28	0,29	0,29
	10	0,04	0,07	0,10	0,13	0,15	0,17	0,19	0,20	0,21	0,23	0,24	0,26	0,27	0,29	0,30	0,31	0,32	0,33	0,34
	11	0,04	0,07	0,11	0,15	0,17	0,20	0,21	0,23	0,24	0,26	0,28	0,30	0,32	0,33	0,35	0,36	0,37	0,38	0,39
	12	0,05	0,09	0,13	0,17	0,20	0,23	0,25	0,26	0,28	0,30	0,32	0,35	0,36	0,38	0,40	0,41	0,42	0,44	0,45
	13	0,05	0,10	0,15	0,20	0,23	0,26	0,28	0,30	0,32	0,35	0,37	0,40	0,42	0,44	0,46	0,47	0,49	0,50	0,52
	14	0,06	0,11	0,17	0,23	0,26	0,30	0,33	0,35	0,37	0,40	0,43	0,46	0,48	0,50	0,53	0,54	0,56	0,58	0,59
	15	0,07	0,13	0,20	0,26	0,30	0,35	0,37	0,40	0,43	0,46	0,49	0,53	0,55	0,58	0,61	0,62	0,64	0,66	0,68

Note: The given cutting values are guide values, which were determined under ideal conditions. The values have to be adapted in individual cases.

1. Select the appropriate product series.
2. Determine the immersion.
3. Select the used material and read the cutting speed.
4. Determine the feed rate group and have a look at the appropriate feed rate recommendations.
5. Select the diameter of tool and determine the immersion.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

Solid carbide reamers

Material group	Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v_c [m/min]								
					3101H7		3102H7		3112H7		3103H7		
					YK10F		YK10F		KRG102		YK10F		
					Coolant								
				Ext.	f-group	Ext.	f-group	Int.	f-group	Ext.	f-group		
P Unalloyed steel	approx. 0,15 % C	annealed	125	1					85	5			
	approx. 0,45 % C	annealed	190	2					75	5			
	approx. 0,45 % C	tempered	250	3					70	5			
	approx. 0,75 % C	annealed	270	4					60	5			
	approx. 0,75 % C	tempered	300	5					55	5			
P Low-alloyed steel		annealed	180	6					75	5			
		tempered	275	7					60	5			
		tempered	300	8					55	5			
		tempered	350	9					55	5			
P High-alloyed steel and high-alloyed tool steel		annealed	200	10					70	5			
		hardened and tempered	325	11					55	5			
M Stainless steel	ferritic/martensitic	annealed	200	12									
	martensitic	tempered	240	13									
	austenitic	quench hardened	180	14									
	austenitic-ferritic		230	15									
K Grey cast iron	perlitic/ferritic		180	16	23	5	23	5	75	5	23	5	
	perlitic (martensitic)		260	17	19	5	19	5	60	5	19	5	
K Cast iron with spheroidal graphite	ferritic		160	18	19	5	19	5	60	5	19	5	
	perlitic		250	19	17	5	17	5	50	5	17	5	
K Malleable cast iron	ferritic		130	20	23	5	23	5	75	5	23	5	
	perlitic		230	21	14	5	14	5	55	5	14	5	
N Aluminium wrought alloys	cannot be hardened		60	22	45	6	45	6			45	6	
	hardenable	hardened	100	23	40	6	40	6			40	6	
	Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		75	24	37	6	37	6			37	6
		$\leq 12\%$ Si, hardenable	hardened	90	25	35	6	35	6			35	6
		$> 12\%$ Si, cannot be hardened		130	26	32	6	32	6			32	6
Copper and copper alloys (bronze/brass)	machining steel, PB > 1%		110	27	37	6	37	6			37	6	
	CuZn, CuSnZn		90	28	34	6	34	6			34	6	
	CuSn, Pb-free copper, electrolytic copper		100	29	37	6	37	6			37	6	
S Heat-resistant alloys	Fe-based alloys	annealed	200	30									
		hardened	280	31									
	Ni or Co bass	annealed	250	32									
		hardened	350	33									
		cast	320	34									
Titanium alloys	pure titanium		R _m 400	35									
	α and β alloys	hardened	R _m 1050	36									
H Hardened steel		hardened and tempered	55 HRC	37									
		hardened and tempered	60 HRC	38									
	Hard cast iron	cast	400	39									
H Hardened cast iron		hardened and tempered	55 HRC	40									
X Non-metallic materials	Thermoplasts			41									
	Thermosetting plastics			42									
	Plastic, glass-fibre reinforced GFRP			43									
	Plastic, carbon fibre reinforced CFRP			44									
	Graphite			45									
X Wood				46									

Note: The given cutting values are guide values, which were determined under ideal conditions.
 The values have to be adapted in individual cases.
 With hole depths of 5xD adjust the cutting data accordingly to the application.
 f-group = feed rate recommendations on page C168.
 For examples of material for cutting tool groups view page D11.

A Turning
B Milling
C Drilling
D Technical Information
E Index

Recommended feed rate

Solid carbide reamers

f-group	Feed rate [mm]																			
	Ø1	Ø2	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11	Ø12	Ø13	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20
1	0,01	0,02	0,03	0,04	0,04	0,05	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10
2	0,01	0,02	0,03	0,04	0,05	0,06	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,09	0,10	0,10	0,10	0,11	0,11	0,11
3	0,01	0,02	0,04	0,05	0,06	0,06	0,07	0,07	0,08	0,09	0,09	0,10	0,10	0,11	0,11	0,12	0,12	0,12	0,13	0,13
4	0,02	0,03	0,04	0,06	0,06	0,07	0,08	0,09	0,09	0,10	0,11	0,11	0,12	0,12	0,13	0,13	0,14	0,14	0,15	0,15
5	0,02	0,03	0,05	0,06	0,07	0,09	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,14	0,15	0,15	0,16	0,16	0,17	0,17
6	0,02	0,04	0,06	0,07	0,09	0,10	0,11	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,17	0,18	0,18	0,19	0,19	0,20
7	0,02	0,04	0,06	0,09	0,10	0,11	0,12	0,13	0,14	0,15	0,16	0,17	0,18	0,19	0,20	0,20	0,21	0,22	0,22	0,23
8	0,03	0,05	0,07	0,10	0,11	0,13	0,14	0,15	0,16	0,17	0,18	0,20	0,21	0,22	0,23	0,23	0,24	0,25	0,26	0,26
9	0,03	0,06	0,08	0,11	0,13	0,15	0,16	0,17	0,18	0,20	0,21	0,23	0,24	0,25	0,26	0,27	0,28	0,29	0,29	0,30
10	0,04	0,07	0,10	0,13	0,15	0,17	0,19	0,20	0,21	0,23	0,24	0,26	0,27	0,29	0,30	0,31	0,32	0,33	0,34	0,35
11	0,04	0,07	0,11	0,15	0,17	0,20	0,21	0,23	0,24	0,26	0,28	0,30	0,32	0,33	0,35	0,36	0,37	0,38	0,39	0,40
12	0,05	0,09	0,13	0,17	0,20	0,23	0,25	0,26	0,28	0,30	0,32	0,35	0,36	0,38	0,40	0,41	0,42	0,44	0,45	0,46
13	0,05	0,10	0,15	0,20	0,23	0,26	0,28	0,30	0,32	0,35	0,37	0,40	0,42	0,44	0,46	0,47	0,49	0,50	0,52	0,53
14	0,06	0,11	0,17	0,23	0,26	0,30	0,33	0,35	0,37	0,40	0,43	0,46	0,48	0,50	0,53	0,54	0,56	0,58	0,59	0,61
15	0,07	0,13	0,20	0,26	0,30	0,35	0,37	0,40	0,43	0,46	0,49	0,53	0,55	0,58	0,61	0,62	0,64	0,66	0,68	0,70

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

Notes

A series of horizontal dotted lines for taking notes, organized into five sections corresponding to the right-hand labels: A (Turning), B (Milling), C (Drilling), D (Technical Information), and E (Index).

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E


Index

Special tools – fine-tuned to your specific application

Special applications call for special solutions optimised to the task. Special tools are able to deliver real benefits from a commercial, technical or process perspective over standard tool solutions in all industry sectors. We work with you to assess the potential in each individual case, taking into account the general conditions available at your company ZCC Cutting Tools Europe's R&D department then develops a custom solution for you at our EU headquarters in Düsseldorf to keep your machining costs as low as possible.

Why opt for special tools from ZCC Cutting Tools?

We develop customised tool solutions for you for a wide range of machining operations. We work closely with you from day one to design tools optimised to meet your needs and priorities. From design and production to logistics, we draw on many years of experience to offer a full range of expert services. Take advantage of our expertise to ensure the long-term success of your company.

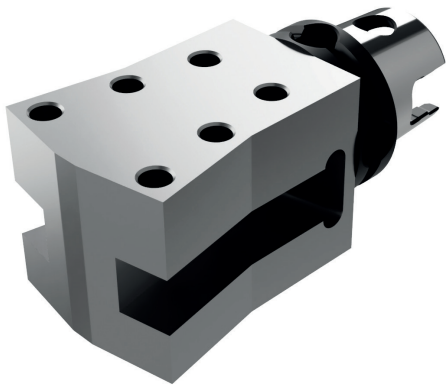


Example: Special tool holder



Example: Special solid carbide step drill

The easy way to order your custom-made special tool


Are there specific applications at your company where having custom tools tailored to your unique needs would deliver real benefits both in terms of logistics and at a technical and commercial level? ZCC Cutting Tools is there to advise and assist you during the planning, development and ordering process. Use our new online tool to request a special tool and get your personal quotation in just a few short steps (www.zccct-europe.com).

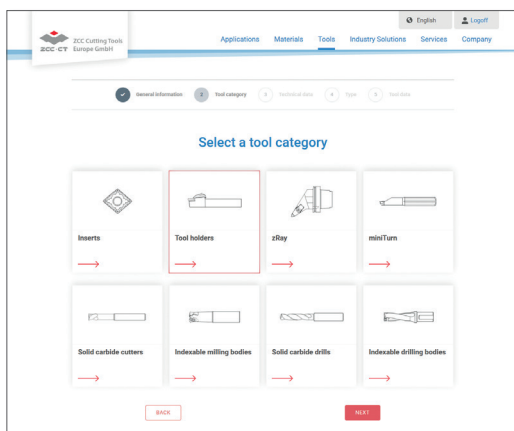

'Online tool for special tools' launch page where you can select the tool category

Selecting the tool category

Scan the QR code on this page to go directly to the launch page of our online tool where you can request the special tool you need. You can begin by selecting the tool category you need. It's that easy.

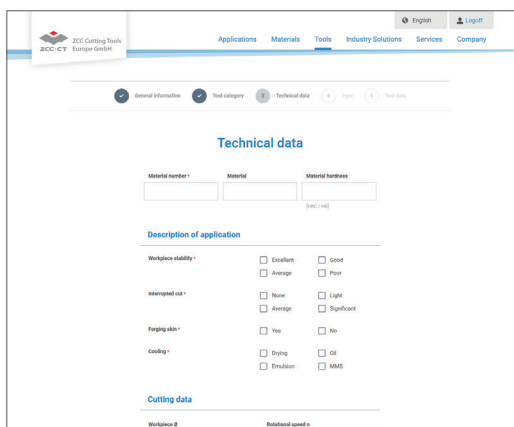

Define the relevant tool parameters

Defining the tool parameters

You are now guided step by step through the process. You can also securely upload your drawings, diagrams and 3D models (where available).

The fast and direct way to order your special tool from ZCC Cutting Tools Europe.



Now go directly to the new **special tool form** on our website and get started.